



Your business our concern



SEASONAL EFFICIENCY
Smart use of energy



SKY AIR PRODUCT RANGE
COMMERCIAL CATALOGUE

SkyAir

About Daikin


Daikin has a worldwide reputation based on nearly 90 years' experience in the successful manufacture of high quality air conditioning equipment for industrial, commercial and residential use and 55 years as a leader in heat pump technology.

Daikin quality

Daikin's much envied quality quite simply stems from the close attention paid to design, production and testing as well as aftersales support. To this end, every component is carefully selected and rigorously tested to verify its contribution to product quality and reliability.

Heat pump technology

Air to air heat pumps obtain 80% of their output energy from renewable sources: the ambient air, which is both renewable and inexhaustible*. Of course, heat pumps also require electricity to run the system, but increasingly this electricity can also be generated from renewable energy sources (solar energy, wind energy, hydropower, biomass).

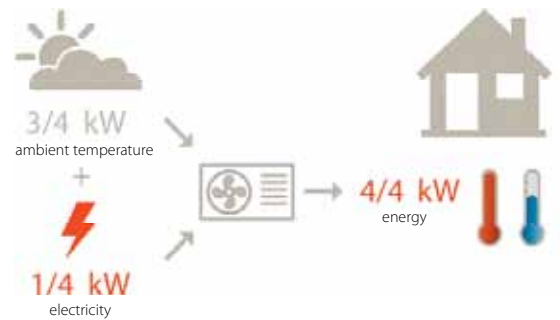

* EU objective COM (2008)/30

Content

Benefits	03
Sky Air the solution for the light commercial sector	04
Products in the spotlight	08
Sky Air Product range	14
Sky Air Product portfolio	18
Benefits overview	22
Pair application	24
Siesta Sky Air	46
Multi model application	52
Ventilation	54
Control systems	67
Options & accessories	84
Measuring conditions	88
Benefits	89



Benefits for building owners

Daikin solutions provide market-leading systems that are ahead of the latest legislation for energy savings and carbon emissions. Delivering a consistent high performance throughout the product's lifespan, the Sky Air range contains operational features that deliver the very highest seasonal efficiencies on the market while the advanced controls and monitoring features allow the delivery of optimal comfort levels with the minimum of costs.

These features provide the following benefits for Building Owners:

- Your climate control system will meet legal requirements well beyond the current legislation
- You will obtain optimal seasonal performance thus saving energy and so reducing costs
- The climate control system will add value to the building thus protecting your investment
- You will save on installation and running costs, obtain rapid return on investment, and contribute to ecological protection objectives

Benefits for installers

Our systems have been designed to provide for an easy transition from existing units to the technologically advanced units that offer far higher energy efficiency solutions. With new compressors, heat exchangers and control systems available for installers to recommend and utilise in system upgrades to meet future regulations, the Sky Air series has been developed with the installer and his client in mind enabling him to provide much more than just an installation service. In reality, Sky Air offers the installer a competitive advantage by being able to recommend an extended 3-phase range, enhanced controllers and optical detection tools that all help deliver optimal performance, high seasonal efficiency, low ecological impact and significant cost savings.

These features provide the following benefits for Installers:

- Modular designs and factory fitted extras make installation easier to achieve

Benefits for consultant and design offices

Daikin has a long history of working closely with the consultants and design offices that recommend our equipment to deliver future-ready systems that meet the requirements of both the buildings and the legislation. Our systems are designed to meet the toughest of energy-efficiency, fiscal and compliance issues to allow flexibility for consultants and design offices in delivering absolute comfort in the most efficient manner, while our tools allow them to maximize building performance. The new Daikin Seasonal Smart system, with its adjustable condensing and evaporating temperatures, is a classic example of thinking ahead to ensure performance.

These features provide the following benefits for Consultants and Design Offices:

- You will have the confidence of knowing that you can recommend the right climate control systems to meet tomorrow's legislation
- You will have systems that are designed to blend into any décor and yet provide optimal performance with top seasonal efficiencies
- You will have access to innovative technology to maximize the climate control performance of the entire building
- Your credentials as an eco-conscious consultant and designer will be enhanced

SkyAir the solution for the light commercial sector

Sky Air is Daikin's industry-leading light commercial range, which has been redesigned for optimum seasonal energy efficiency ahead of the latest legislation. Providing the ideal solution for all kinds of small commercial spaces, the Sky Air series offers a complete comfort solution that puts you in total control of your heating and cooling, ventilation and air curtains.





Heating and cooling

Using highly **efficient heat pumps**, Sky Air solutions offer year round comfort:



- All systems now optimised for seasonal energy efficiency.
- A heat pump system can be combined with an outdoor unit powering several indoor units.
 - For a long or irregularly shaped room you can use up to four indoor units linked a single outdoor unit. All the indoor units are controlled at the same time.
 - Air conditioning is available in every room: a multi system allows up to nine different indoor units to operate from a single outdoor unit. All the indoor units can be individually controlled and do not need to be installed at the same time. Extra units can be added later.
- Select from a wide range of indoor units: wall and floor mounted, concealed or ceiling mounted.
- Very quiet and draught-free operation.
- Ideal for both new build and refurbishment projects.



Biddle air curtains for entrances

Biddle air curtains can be used with the Sky Air system to provide heating at building entrances.

Daikin Sky Air can be used with Biddle air curtains to provide heating at building entrances:

- Ideal for buildings with open-door policy such as retail stores.
- Year round climate control and comfort even on the most demanding days.



User-friendly controls

Our **user friendly controls** allows you to manage your Sky Air system for maximum efficiency:


- From individualised unit control to centralised management via touch-screen options and code based controllers, we put you in command at all times.
- The wired remote controller gives full access to the unit's functions and energy saving features, including indication of kWh usage and flexible scheduling for different seasons.
- The DIII-net connection is now standard on most units, allowing you to link into the wider building management system.
- Text based remote control and monitoring of the entire building is available via the internet.



Ventilation

Daikin's **ventilation** option provides a supply of fresh air to help create a healthy and high-quality indoor environment:

- Heat is reclaimed between outdoor and indoor air.
- The fresh air from the ventilation provides additional cooling virtually free.
- Optimum humidity control.

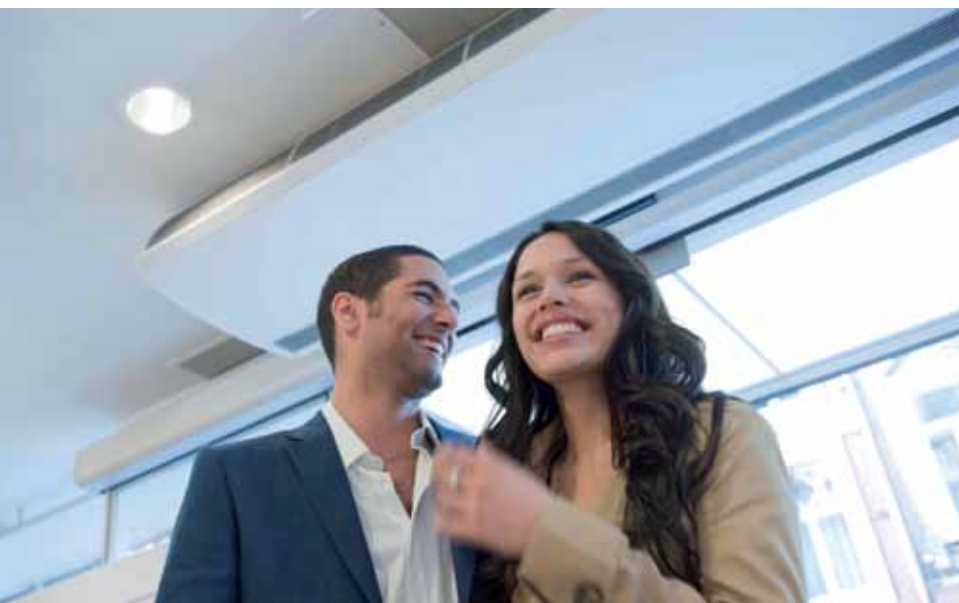

SkyAir the solution for the light commercial sector



Sky Air for retailers

- Creates an inviting atmosphere for your customers.
- Discreet with limited visual and operating impact.
- Reduces energy usage and costs.
- Worry-free installation.

Our **round flow cassettes** blend with your décor as they are **integrated in the ceiling** with only the standard panel visible. This standard panel is the secret to **increasing comfort levels** and providing the **perfect climate conditions** for your customers as the various flaps can be individually opened and closed to ensure that the heating and cooling are directed to where they are needed.

The standard panel is also the secret to reducing maintenance as it conceals the **auto cleaning function** that traps dust with a special filter that cleans itself once a day, while the collected dust can be easily removed with a vacuum cleaner. Up to 50% energy can be saved!

Managing this system couldn't be easier as our intelligent touch controller enables you to **monitor and control** the system directly or via the Internet. It can also be set to provide easy management of your electricity consumption and can even control the lighting, while enhanced scheduling will make your life easier.



Sky Air for offices and banks

The **fully flat cassette** is unique in the market thanks to its remarkable blend of iconic **design and engineering excellence**.

Blending seamlessly with the décor of a modern office and meeting the demanding criteria of architects, the fully flat cassette totally integrates within a standard European ceiling panel, enabling lights, speakers and sprinklers to be installed in the adjoining ceiling tiles.

These units are ideal for heating or cooling smaller areas such as meeting rooms, together with our round flow cassettes. Both can be combined with presence and floor sensors and even with our ventilation option, to optimise the energy efficiency and provide perfect comfort. The **presence sensor** adjusts the set point or switches the unit off when there is nobody in the room but when someone is there, the air-flow is directed away from that person to avoid draught. This combined process has been found to reduce energy usage. The **floor sensor** detects the average temperature near the floor and ensures an even temperature distribution between ceiling and floor. Cold feet become history!

Daikin's **ventilation** option provides a supply of fresh air to help create a healthy and high-quality indoor environment.

Using the KNX interface to connect your Sky Air system to the **building management** system allows central monitoring and control of several devices, including lights, shutters, and climate control systems as to maximize energy efficiency.



Sky Air for server rooms

- Continuous cooling operation.
 - Automatic rotation between active units.
 - Backup outdoor unit ensures continuous operation.
 - Possible to block certain settings.
- Quality products.

Servers, especially racks of servers, generate a great deal of heat and this needs to be removed through **continuous cooling and humidity control**. This presents special challenges that the Sky Air system easily meets with its special server room configuration. Each server room is fitted with two indoor units each connected to a single outdoor unit to ensure that if one outdoor unit fails, the other is there as an **automatic back up**. The indoor units are configured for constant cooling and duty rotation. This is achieved through **automatic switching between units** after certain period of use to ensure that at any time one unit is working while the other is available for maintenance.

Given the critical importance of continuous cooling for server rooms, the system is managed via an RTD-NET controller that can monitor and control up to 16 indoor units either directly or via the building management system and has a **'control of duty'** unit that locks the server room settings so that they cannot be changed by people in the server room.



Sky Air for restaurants

- Creates the perfect dining environment.
- Ensures an even temperature distribution to provide optimal comfort for your guests.
- Highly energy efficient.
- Uses intelligent control systems operated from one central location.

Nothing should distract diners from enjoying the **perfect ambience** and that ambience includes the **optimal temperature**. That's exactly what Daikin's concealed ceiling units deliver through whisper-quiet operation and improved comfort from the 3-step air flow control and these turn your restaurant into a comfortable, welcoming environment for your customers. And with the **centralised control** and easy scheduling for the entire restaurant system, **energy use** is minimised to control your running costs.

Products in the spotlight

Daikin offers now a **complete light commercial** range, optimised for seasonal efficiency!

		new		new				new	
		FCQG / FCQHG	FFQ	FHQ	FBQ	FDQ	FAQ	FVQ	FUQ
RZQG-L Seasonal Smart									
RZQSG-L Seasonal Classic		✓	✓	✓	✓	✓	✓	✓	


→ Seasonal outdoor units:

Seasonal Smart and Seasonal Classic products have been specially designed to offer a very high seasonal performance that already meets the 2014 ErP requirements.

Top efficiency:


- New compressor that offers substantial efficiency improvements.
- New control logic
 - that optimises the efficiency at the most frequently encountered operating conditions.
 - that optimises the auxiliary modes (when the unit is not active).
- Newly designed heat exchangers optimise the refrigerant flow at the most frequent operating conditions (temperature and load) by reducing the piping diameter of the heat exchanger which leads to a significant enhancement in energy efficiency.
- Additionally, these new seasonal outdoor models also offer an improved nominal performance.

→ Variable Refrigerant Temperature

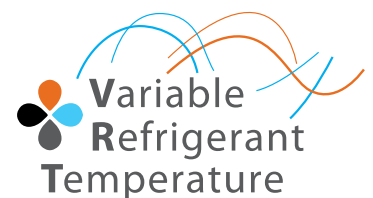


Did you know that all Daikin Sky Air systems operate with variable refrigerant temperature?

In cooling mode for example the system will automatically increase its evaporating temperature (T_e) and consequently discharge temperature if the gap between the achieved indoor temperature (T_{in}) and the request indoor temperature (T_{set}) becomes smaller. This reduces the risk of cold draft and hence increases the customer comfort.

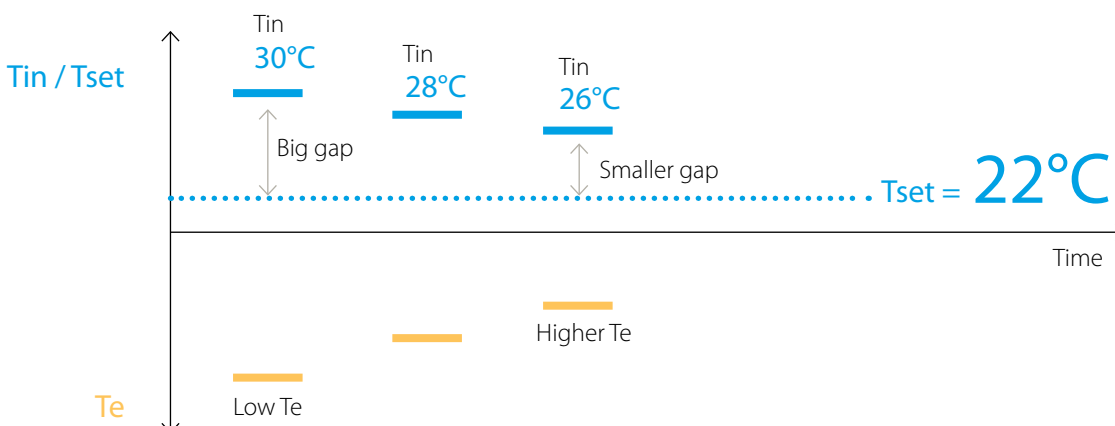

Seasonal Smart even adopts a special setting to further improve comfort & efficiency by offering the possibility to customize the boundaries of the evaporating (Te) or condensing (Tc) temperature limits. The perfect solution for those people looking for an even more comfortable indoor air climate & an even further reduction of their energy bill.

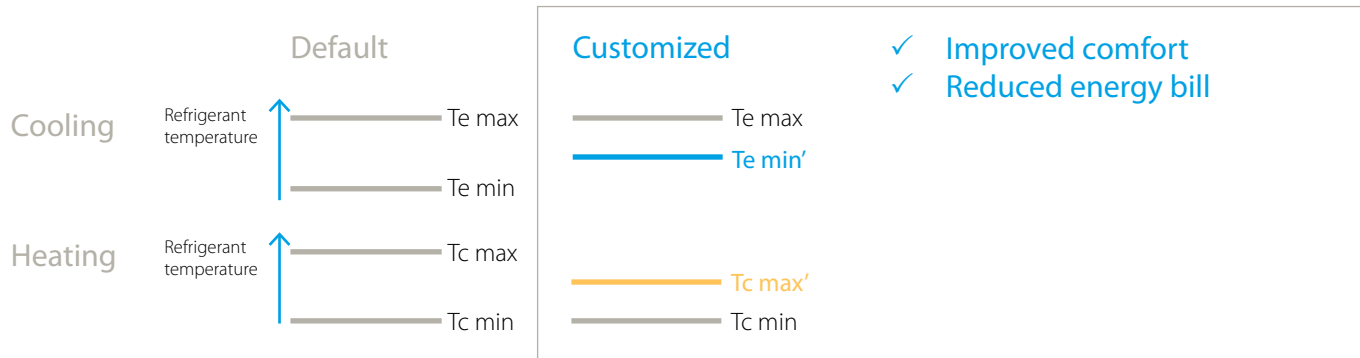

Seasonal Smart

Enhancement in efficiency and comfort thanks to selectable and variable refrigerant temperatures.

- Suits computer room applications (EDP).
- R-22/R-407C Replacement technology has been incorporated: replacement solutions deliver major energy savings, offering rapid payback and a cost-effective upgrade solution, phased for minimal downtime.
- Guarantees operation in heating mode down to -20°C.
- A 75m pipe run to achieve longer runs for installation.
- Compatibility with D-BACS – links your unit into the wider building management system.



Seasonal Classic

- R-22/R-407C Replacement technology has been incorporated: replacement solutions deliver major energy savings, offering rapid payback and a cost-effective upgrade solution, phased for minimal downtime.
- Guarantees operation in heating mode down to -15°C.
- A 50m pipe run to achieve longer runs for installation.



→ Air conditioning with smart use – User friendly remote controller BRC1E52A/B

A series of energy saving functions that can be individually selected

- Temperature range limit
- Improved setback function
- Presence & floor sensor connections (available on fully flat cassette & round flow cassette)
- Setting temperature auto reset
- Off timer
- kWh indication
- 3 weekly timers



→ Fully Flat Cassette: Design & Genius in one

Unique in the market, the fully flat cassette is a remarkable blend of iconic design and engineering excellence with an elegant white or a silver and white finish. Fitting flush within the ceiling modules and fully flat with the ceiling itself, the cassette is both stylish and unobtrusive. Superb efficiency and comfort is delivered through the combined use of floor and presence sensors and, when necessary, the individual flap control via the wired remote controller makes it simple to close one flap.



Fully integrated, fully discreet

The concept our designers had in mind was for an unobtrusive cassette that blends seamlessly with the décor of a modern office while meeting the demanding criteria of architects for total integration within a standard European ceiling panel, enabling lights, speakers and sprinklers to be installed in the adjoining ceiling tiles. The result is the fully flat cassette with its near flush fit, 4-way air distribution and special sensors to ensure the delivery of perfect comfort. Available in crystal white or crystal white and grey, the fully flat cassette is the perfect blend of design and function.

Differentiated by excellence

Sensor-driven comfort

To ensure perfect comfort the fully flat cassette is fitted with two optional sensors linked to an advanced controller.

The **'presence' sensor** detects when there are people in the room and it adjusts the temperature to the previously selected 'set point' thus establishing the perfect working conditions. When the sensor establishes that the room is empty, it can switch off the cassette so that the user is not wasting money on unnecessary heating or cooling. The sensor also adapts the direction of the airflow depending of where people are situated in the room, ensuring every individual's comfort at any time.

Because hot air rises, the natural temperature distribution in a room is for it to be warmer near the ceiling and cooler near the floor. The cassette's **'floor' sensor** detects the temperature difference and re-directs the airflow to ensure that the temperature distribution is even: cold feet are history!





Flexible solution

The need for flexible usage of space often means that temporary or permanent barriers are erected leaving the cassette close to a wall or in a corner with the resulting imbalances in airflow. Our advanced technology anticipates this and we have made it possible to use the controller to individually open or close any of the four flaps to restore optimal efficiency and to save on energy costs.

Silent comfort

The fully flat cassette is amongst the quietest units in the market and, in addition to the sensors, has various functions that are designed to enhance the user's comfort and pleasure.

Air quality

The quality of the air in the room is as important as the temperature and we have fitted advanced filters to remove dust particles to ensure the air is clean. In addition, a special programme allows the humidity levels to be reduced without variations in temperature.

Intuitive control

The fully flat cassette's advanced controller provides the user with absolute control over their work environment. From setting the desired temperature to directing the airflow, from delivering the right temperature whenever the room is in use to ensuring that cold feet are history, from reconfiguring airflow to monitoring performance, the advanced controller is simple and intuitive to use. The large display screen and on-screen instructions combined with clearly marked function buttons give users total control enabling them to quickly set their desired conditions and to focus on the job at hand.

Top efficiency year-round

As with all Daikin products, this cassette delivers exceptional seasonal efficiency while the presence sensor has been shown to reduce energy consumption by around 27%*.

By using the controller to monitor performance and energy consumption, users can reduce their environmental impact while maintaining perfect working conditions.

*estimated

→ Round Flow Cassette : setting the standard for efficiency and comfort


The round flow cassettes FCQG and FCQHG-F series are designed for use in all forms and sizes of commercial offices and retail environments and provide you with a more energy efficient model.



Even more energy efficient


- Daikin was the first to launch an **auto cleaning Standard panel**. With this panel the costs can be further reduced as the filter cleans itself automatically once a day.
- Maintenance of the filter is facilitated and so less time is required.
- Running costs are reduced compared to standard solutions: **up to 50% energy can be saved** thanks to daily filter cleaning (Wolverhampton, UK).

Auto-cleaning panel
saves up to 50% →

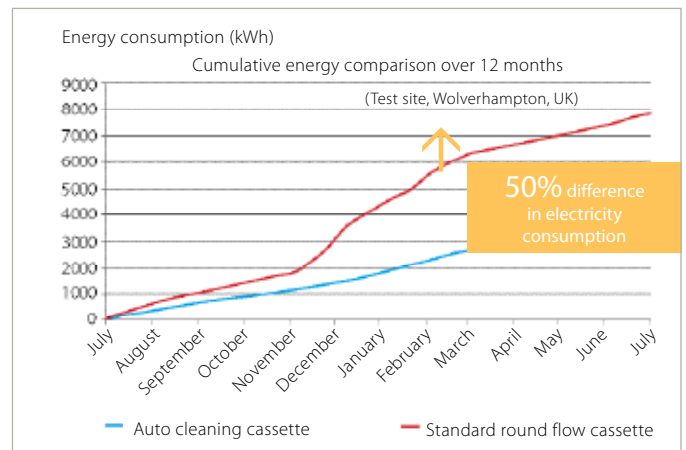

- The optional **presence sensor** adjusts the temperature or switches off the unit when there is nobody in the room. Up to 27% energy can be saved with this new function.
- If no presence is detected in the room for 15mins, the set temperature is changed until a minimum temperature (for heating) or maximum temperature (for cooling) is reached. When selecting the setback function, the unit will maintain the temperature within a preset minimum and maximum temperature, when there is no presence detected in the room for 1 hour.
- Newly designed **heat exchanger** (diameter pipes are reduced to 5mm instead of 7mm), DC fan motor and DC drain pump enable even more energy to be saved.

Presence sensor
saves up to 27%* →

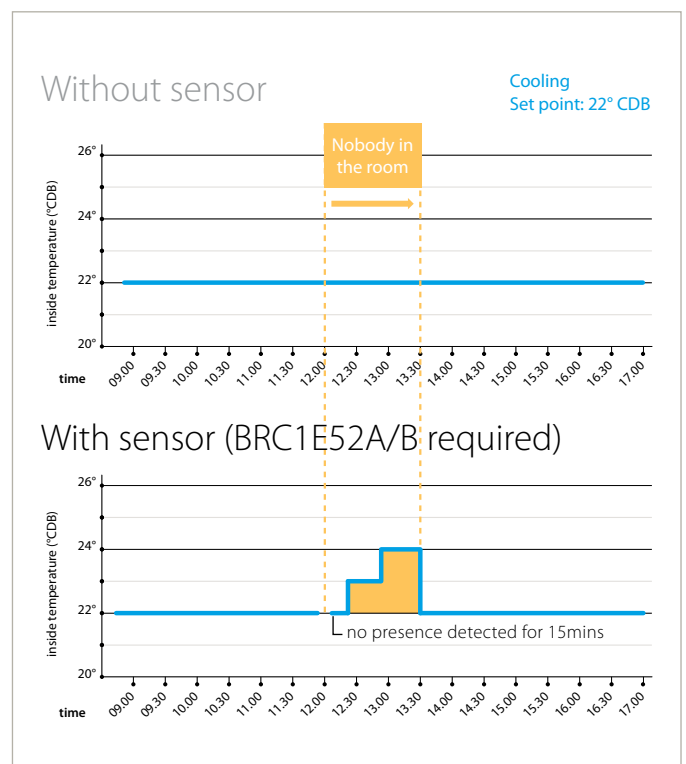

* estimated energy saving




... and improved comfort

- The unique **360° air flow** discharge pattern ensures a uniform temperature distribution across the room without dead corners.



The comfort can be further enhanced thanks to the optional sensors:


- The presence sensor allows air flow control. It directs the air away from any person detected in the room, when the air flow control is on.
- With the **floor sensor** having cold feet becomes history. This sensor detects the average floor temperature and ensures an even temperature distribution between ceiling and floor.

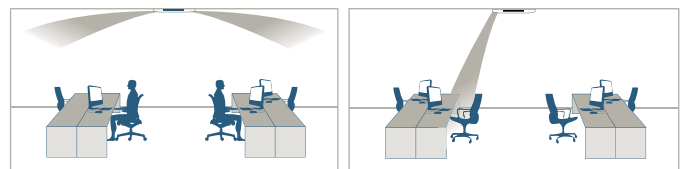

Flexible installation

The round flow cassette offers higher flexibility thanks to:

- The possibility of easily closing one flap via the wired remote controller (BRC1E52A/B - optional), to suit the room configuration. Optional closure kits are available as well.

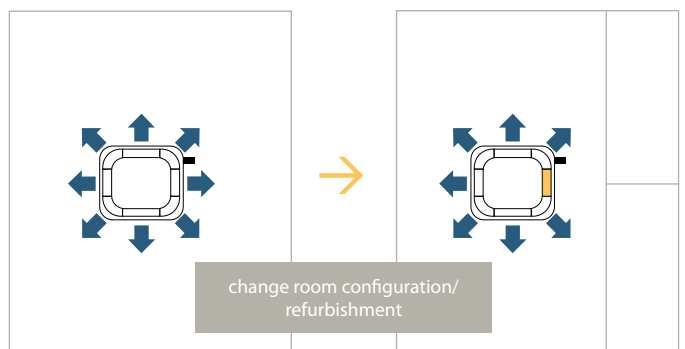

Other features

- Standard DIII-net compatibility – link your cassette into the wider building management system.
- Fresh air intake possible (max. 20%).





Sky Air Product range

Daikin leads the way to seasonal efficiency
Seasonal efficiency... Smart use of energy 16

Product portfolio	18
Benefits overview	22
Pair application	
Round flow cassette	24
Fully flat cassette	30
Concealed ceiling units	32
Wall mounted units	38
Ceiling suspended units	40
Floor standing units	44
Siesta Sky Air	
Ceiling mounted cassette	46
Concealed ceiling units	47
Ceiling suspended units	48
Twin, triple, double twin applications	49
Multi model applications	52
VRV8-S heat pump for residential application	53
Ventilation	54

Daikin leads the way: Seasonal series

Daikin again leads the industry with their full light commercial range optimised for seasonal efficiency, which already meets the very challenging 2014 ErP requirements.

Our Sky Air Seasonal series – **Seasonal Smart** and **Seasonal Classic** – offer at least 20% better performance than current existing inverter solutions and this is fully in line with 20/20/20 EU policy. This performance can be further enhanced with a smart use of unique Daikin options. The technology used gives very high levels of seasonal efficiency while maintaining or improving the comfort and flexibility features that make Daikin so unique.

Daikin has a solution for all your needs:

 Seasonal Smart

- **Seasonal Smart** offers TOP seasonal efficiency. It meets the needs of projects requiring high flexibility such as longer piping lengths, a wider operating range or EDP applications. Efficiency and comfort can be further enhanced with selectable evaporating and condensing temperatures.

 Seasonal Classic

- **Seasonal Classic** offers an effective solution for applications where less flexibility is required.



Seasonal efficiency ...

Smart use of energy

Challenging 20-20-20 environmental targets

The European Commission has set challenging targets for improving energy efficiency in the EU. These so-called 20-20-20 targets aim at a 20% reduction in CO₂ emissions, 20% share of renewable energy and a 20% reduction in the use of primary energy, all by the year 2020. To realise these objectives, Europe issued the Eco-Design Directive [2009/125/EC]. This sets minimum efficiency requirements for energy related products. After 2013, all air conditioners and air to air heat pumps under 12 kW come into scope of this Eco-Design Directive. From 2013, products unable to comply with the minimum efficiency requirement (such as non-inverter air conditioners) will lose their CE marking and thus may no longer be sold in Europe. In 2014 the energy-performance bar will again be raised significantly.

Major change: seasonal efficiency in line with real-life performance


Not only does the Eco-Design Directive systematically raise the minimum requirements with respect to environmental performance, the method used to measure this performance has also been changed to better reflect real-life conditions. Previous measurements reflected so-called nominal efficiency, a measurement of performance at one fixed outdoor temperature and with equipment running at full power. Since a cooling or heating season involves a range of outdoor temperatures (not just the one nominal temperature in the rating) and equipment is often only running at partial load, this old rating did not properly reflect actual performance.

The new method, seasonal efficiency, measures heating and cooling performance across a range of outdoor temperatures that give a better representation of actual efficiency over an entire heating or cooling season. Moreover, auxiliary modes such as stand-by mode are also taken into account in the new seasonal efficiency ratings. Thus seasonal efficiency gives a much better representation of the real performance of an air conditioner, in real-life conditions, across an entire season.

Temperature		Capacity		Auxiliary modes	
NOMINAL	SEASONAL	NOMINAL	SEASONAL	NOMINAL	SEASONAL
1 Temperature condition: 35°C for cooling 7°C for heating	Several rating temperatures for cooling and heating, reflecting actual performance over an entire season	Does not reflect partial capacity	Integrates operation at partial instead of full capacity	Does not take auxiliary power modes into account	Includes consumption auxiliary modes:
Does not often occur in reality		Benefits of inverter technology not visible	Benefits of inverter technology are shown		<ul style="list-style-type: none"> • Thermostat off • Standby mode • OFF mode • Crankcase heater

Nominal efficiency gives an indication on how efficient an air conditioner is when operating in a nominal condition.

Seasonal efficiency gives an indication on how efficient an air conditioner is when operating over an entire cooling or heating season.



Europe's new energy label: raising the bar on energy efficiency

To inform consumers concerning these new energy performance standards, Europe is also introducing a new energy label. The present European energy label, introduced in 1992, has had its effect. Consumers are able to compare and make purchasing decisions based on uniform labelling criteria. The new label that will come into force on 1 January 2013 will allow end-users to make even better informed choices, since seasonal efficiency reflects air conditioner efficiency over an entire season.















The new energy label includes multiple classifications from A+++ to D reflected in colour shadings ranging from dark green (most energy efficient) to red (least efficient). Information on the new label includes not only the new seasonal efficiency ratings for heating (SCOP) and cooling (SEER), but also annual energy consumption and sound levels.

Daikin leading the way to seasonal efficiency










While the challenges of Eco-Design are immense, Daikin has resolutely chosen for early implementation of this new legislation. Already in 2010, Daikin launched a new light commercial range fully optimised for seasonal efficiency. The Seasonal Smart series in this range in fact already complies with the very challenging 2014 minimum requirements. Today Daikin is proud to indicate the seasonal performance of its entire residential and light commercial range up to 12 kW.



Indoor units Pair, twin, triple & double twin application

Type	Model	Product name	
Ceiling mounted cassette	High COP, round flow cassette Auto cleaning function ² , presence & floor sensor ²	FCQHG-F	
	Round flow cassette Auto cleaning function ² , presence & floor sensor ²	FCQG-F	
	Fully flat cassette presence & floor sensor ²	FFQ-C	
Concealed ceiling	Concealed ceiling unit	FDBQ-B	
	Inverter driven concealed ceiling unit	FBQ-C8 ¹	
	Large concealed ceiling unit	FDQ-C	
	Large concealed ceiling unit	FDQ-B ¹	
Wall mounted	Wall mounted unit	FAQ-C	
Ceiling suspended	Ceiling suspended unit	FHQ-C	
	4-way blow ceiling suspended unit	FUQ-C	
Floor standing	Floor standing unit	FVQ-C	
<i>Siesta</i>	Siesta, 4-way blow ceiling mounted cassette	ACQ-B	
	Siesta, Concealed ceiling unit	ABQ-A/B	
	Siesta, Ceiling suspended cassette	AHQ-C	




1) Twin, triple, double twin application is only possible up to 125 class 2) Optional

Outdoor units Pair, twin, triple & double twin application

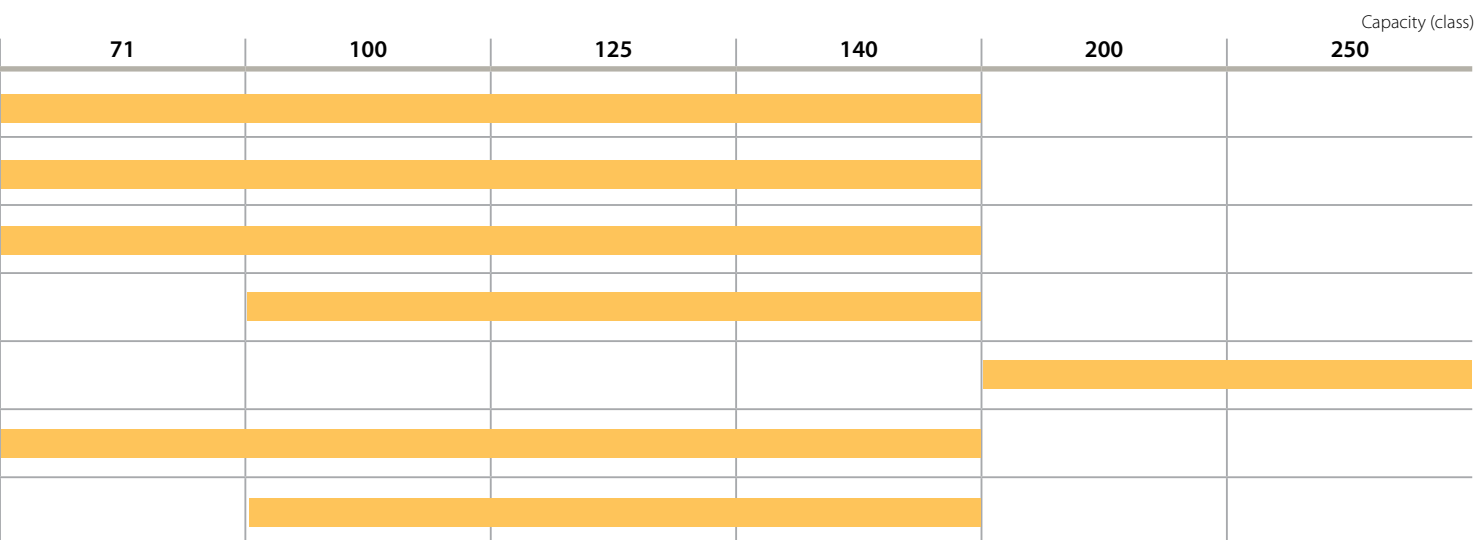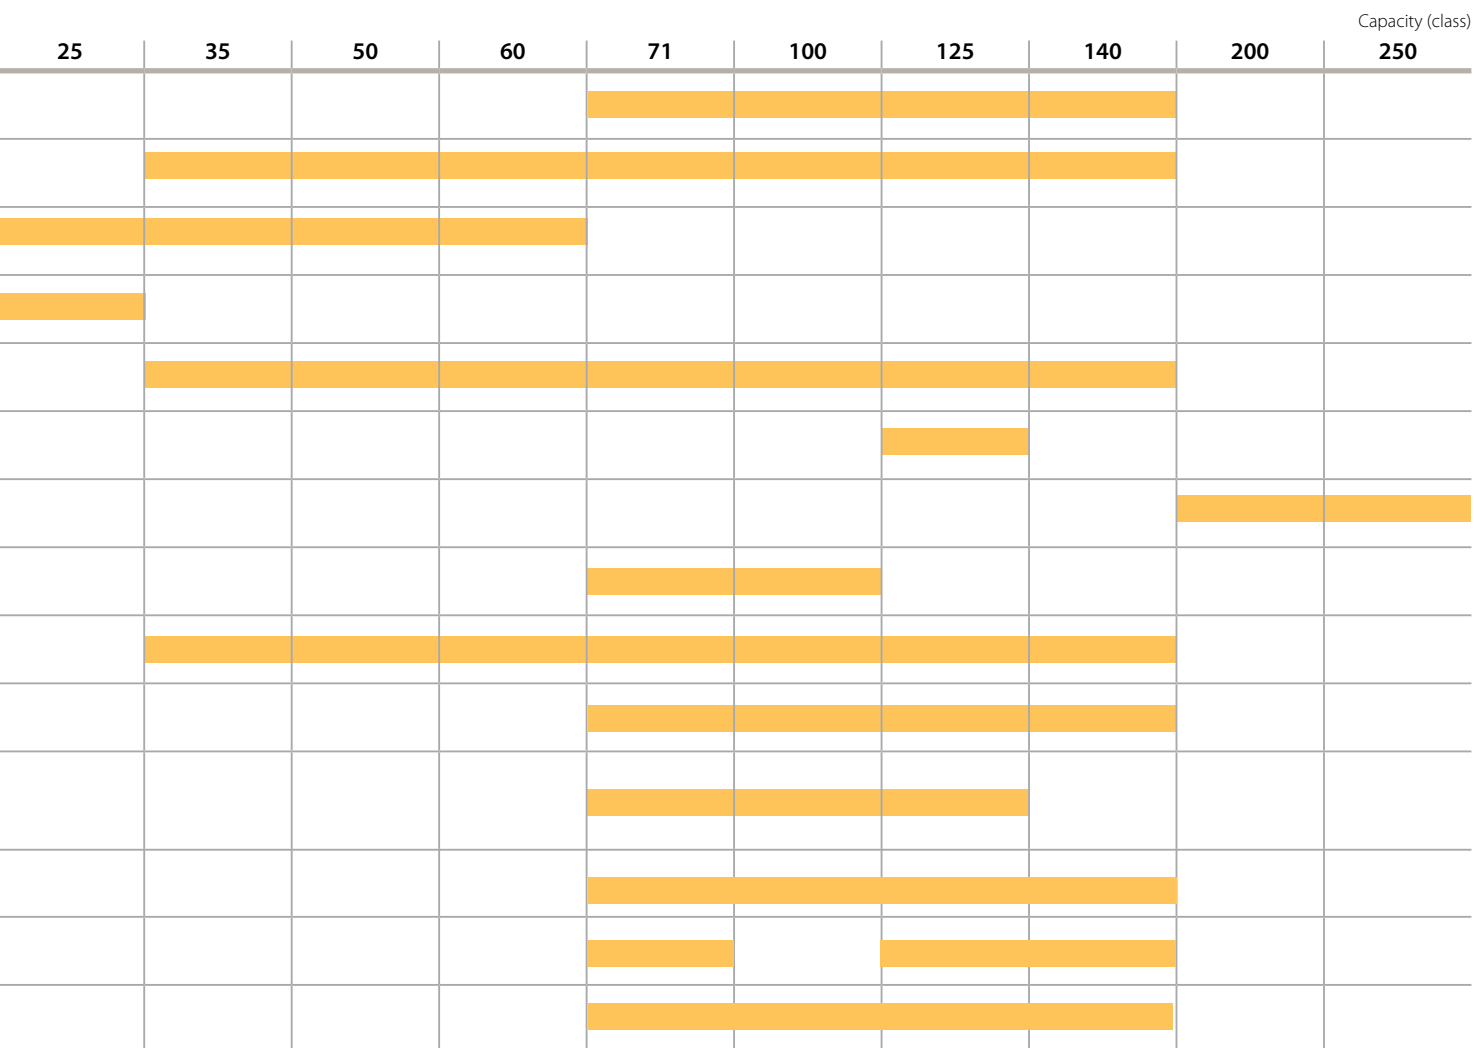

System	Type	Product name	
Air cooled	Heat pump	RZQG-L8/7V1 Seasonal Smart	
		RZQG-L(8)Y1 Seasonal Smart	
		RZQSG-L3/L8V1 Seasonal Classic	
		RZQG-L(8)Y1 Seasonal Classic	
		RZQ-C Super Inverter	
		AZQS-BV1 Siesta outdoor unit	
		AZQS-BY1 Siesta outdoor unit	





Biddle standard air curtain range

Type	Product name	
BIDDLE STANDARD AIR CURTAIN FREE HANGING	CYQ S/M/L-DK-F	
BIDDLE STANDARD AIR CURTAIN CASSETTE	CYQ S/M/L-DK-C	
BIDDLE STANDARD AIR CURTAIN RECESSED	CYQ S/M/L-DK-R	




For connection with air handling units and biddle air curtain









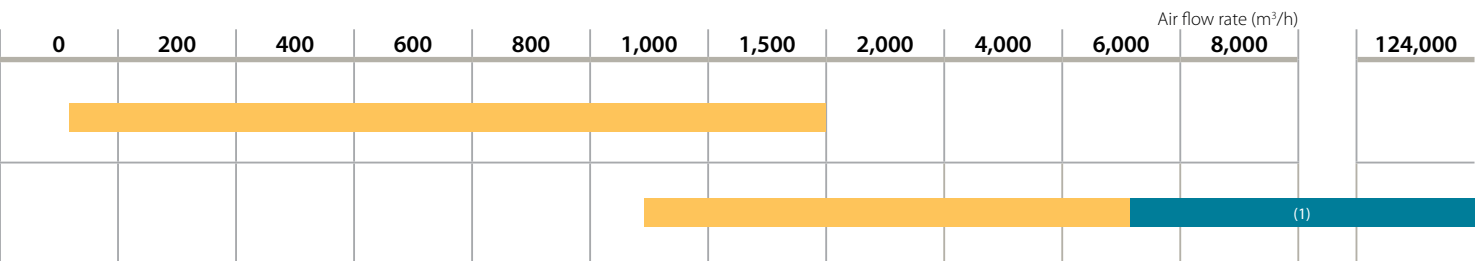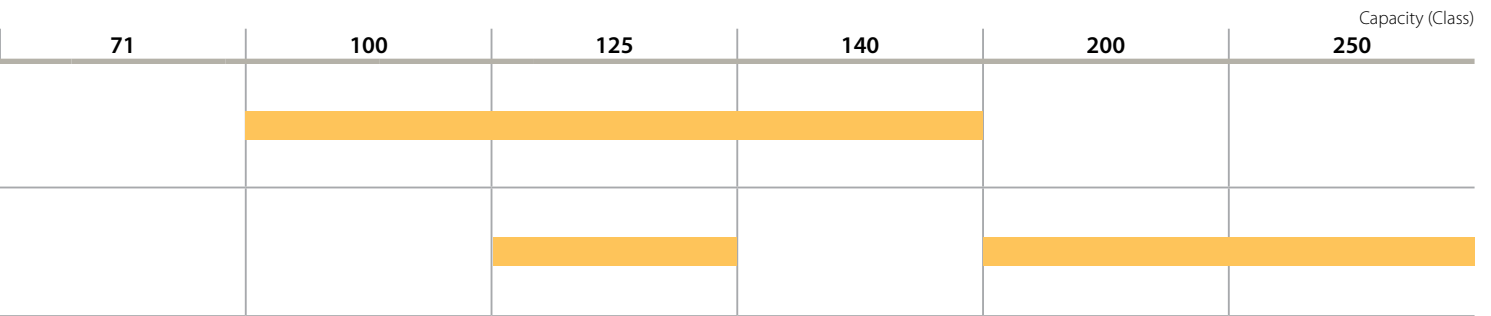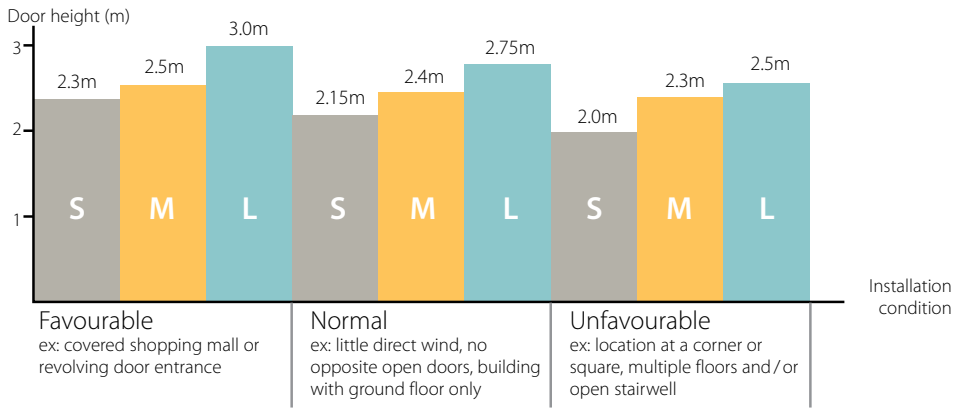



















System	Type	Product name	
AIR COOLED	HEAT PUMP	ERQ-AV1 ¹ Condensing Units	
		ERQ-AW1 ¹ Condensing Units	

1) Only use the condensing units in combinations with an air handling unit.

Type	Product name	
HEAT RECLAIM VENTILATION	VAM-FA/FB	
AIR HANDLING UNITS	DX fresh air package	

(1) Daikin AHU connected to Daikin chiller solution



		Ceiling mounted cassette				
		FCQHG-F	FCQG-F	FFQ-C	ACQ-B	FDBQ-B
						
We care icons	 Seasonal efficiency - Smart use of energy	✓	✓	✓	✓	✓
	 Inverter technology	✓	✓	✓	✓	✓
	 Home leave operation	✓	✓	✓		✓
	 Fan only	✓	✓	✓	✓	✓
	 Auto cleaning panel	✓	✓			
Comfort	 Draught prevention	✓	✓	✓	✓	
	 Whisper quiet	✓	✓	✓		✓
	 Auto cooling-heating changeover	✓	✓	✓	✓	✓
Air treatment	 Air filter	✓	✓	✓	✓	✓
Humidity control	 Dry programme	✓	✓	✓		✓
Air flow	 Ceiling soiling prevention	✓	✓	✓	✓	
	 Vertical auto swing	✓	✓	✓		
	 Fan speed steps	3	3	2	3	2
Remote control & timer	 Weekly timer	✓	✓	✓	✓	✓
	 Infrared remote control	✓	✓	✓	✓	
	 Wired remote control	✓	✓	✓	✓	✓
	 Centralised control	✓	✓	✓		
Other functions	 Auto-restart	✓	✓	✓		✓
	 Self-diagnosis	✓	✓	✓		✓
	 Drain pump kit	✓	✓	✓		
	 Twin/triple/double twin application	✓	✓	✓		
	 Multi model application		✓	✓		✓
	 VRV for residential application		✓	✓		✓

For explanation on the benefits, see the end of this catalogue.

Concealed ceiling unit				Ceiling suspended unit		4-Way blow ceiling suspended unit	Wall mounted unit	Floor standing unit
FBQ-C8	FDQ-C	FDQ-B	ABQ-A/B	FHQ-C	AHQ-C	FUQ-C	FAQ-C	FVQ-C
								
✓	✓		✓	✓	✓	✓	✓	✓
✓	✓	✓	✓	✓	✓	✓	✓	✓
✓	✓	✓		✓		✓	✓	✓
✓	✓	✓	✓	✓	✓	✓	✓	✓
						✓		
✓			✓					
✓	✓	✓	✓	✓	✓	✓	✓	✓
✓	✓	✓		✓		✓	✓	✓
				✓		✓	✓	✓
3	3	2	3	3		3	3	3
✓	✓	✓	✓	✓	✓	✓	✓	✓
✓				✓	✓	✓	✓	
✓	✓	✓	✓	✓	✓	✓	✓	✓
✓	✓	✓		✓		✓	✓	✓
✓	✓	✓		✓		✓	✓	✓
✓	✓	✓		✓		✓	✓	✓
✓	✓			✓		✓	✓	
✓	✓	✓		✓		✓	✓	
✓				✓				
✓				✓				





FCQG35-60F



RXS35K



BRC1E52A/B BRC7F532F



- > The round flow cassette provides a more comfortable environment and offers greater savings in energy consumption to shop, office and restaurant owners
- > 360° air discharge ensures uniform air flow and temperature distribution
- > Modern style decoration panel is available in 3 different variations: pure white (RAL9010) auto cleaning panel, pure white (RAL9010) standard panel with grey louvers and pure white (RAL9010) standard panel with white louvers
- > Daikin introduces first auto cleaning cassette to European market.
- > Higher efficiency and comfort thanks to daily auto cleaning of the filter.
- > Lower maintenance costs thanks to auto cleaning function.
- > Easy dust removal with vacuum cleaner without opening the unit.
- > The presence sensor (optional) : adjusts the temperature or switches off the unit when there is nobody in the room - ensures the air flow is directed away from any person detected in the room, when the air flow control is activated
- > The floor sensor (optional) detects the average floor temperature and ensures even temperature distribution between ceiling and floor. Cold feet will become history.
- > Individual flap control: one flap can be easily closed via the wired remote controller (BRC1E52) in case you would refurbish or rearrange your interior
- > Fresh air intake: up to 20 %
- > No optional adapter needed for DIII-connection, link your unit into the wider building management system.

Heating & Cooling

INDOOR UNIT				FCQG35F	FCQG50F	FCQG60F
Cooling capacity	Min./Nom./Max.		kW	-/3.4/-	-/5.0/-	-/5.7/-
Heating capacity	Min./Nom./Max.		kW	-/4.2/-	-/6.0/-	-/7.00/-
Seasonal efficiency (according to EN14825)	Cooling	Energy label		A	A+	A+
		Pdesign	kW	3.50	5.00	5.70
		SEER		5.34	5.89	5.74
	Heating (Average climate)	Annual energy consumption	kWh	230	297	347
		Energy label		A++	A+	A
		Pdesign	kW	3.32	4.36	4.71
Nominal efficiency (cooling at 35°/27° nominal load, heating at 7°/20° nominal load)	Annual energy consumption	SCOP	kWh	4.74	4.24	3.87
		Annual energy consumption	kWh	981	1,442	1,702
		EER		3.58	3.55	3.48
COP				3.70	3.52	
	Annual energy consumption	kWh	475	705	820	
Energy label	Cooling/Heating			A/B	A/A	A/B
	Colour					
Dimensions	Unit	HeightxWidthxDepth	mm	204x840x840		
Weight	Unit		kg	18	19	
Decoration panel	Model	BYCQ140D7W1/BYCQ140D7W1W/BYCQ140D7GW1				
	Colour	Pure White (RAL 9010)				
	Dimensions	HeightxWidthxDepth	mm	60x950x950/60x950x950/145x950x950		
Weight			kg	5.4/5.4/10.3		
	Fan - Air flow rate	Cooling	High/Nom./Low	m³/min	12.5/10.6/8.7	12.6/10.7/8.7
Sound power level	Heating	High/Nom.	m³/min	12.5/10.6	12.6/10.7	13.6/11.2
	Cooling	High	dB(A)	49	49	51
Sound pressure level	Heating	High	dB(A)	49	49	51
	Cooling	High/Nom./Low	dB(A)	31/29/27	31/29/27	33/31/28
Piping connections	Heating	High/Nom./Low	dB(A)	31/29/27	31/29/27	33/31/28
	Liquid	OD	mm	6.35		
Power supply	Gas	OD	mm	9.5	12.7	
	Phase / Frequency / Voltage	Hz / V		1~ / 50 / 220-240		

OUTDOOR UNIT				RXS35K	RXS50K	RXS60F
Dimensions	Unit	HeightxWidthxDepth	mm	550x765x285	735x825x300	735x825x300
Weight	Unit		kg	34	47	47
Fan - Air flow rate	Cooling	High/Low	m³/min	36.0/30.1	50.9/48.9	50.9/42.4
	Heating	High/Low	m³/min	28.3/25.6	45.0/43.1	46.3/42.4
Sound power level	Cooling	Nom./High	dB(A)	-/63	-/63	63/-
Sound pressure level	Cooling	High/Low	dB(A)	48/44	48/44	49/46
	Heating	High/Low	dB(A)	48/45	48/45	49/46
Operation range	Cooling	Ambient	Min.-Max. °CDB	-10~46	-10~46	-10~46
	Heating	Ambient	Min.-Max. °CWB	-15~18	-15~18	-15~18
Refrigerant	Type/GWP			R-410A/1,975	R-410A/1,975	R-410A/1,975
Piping connections	Piping length	OU - IU	Max. m	20	30	30
	Level difference	IU - OU	Max. m	15	20	20
Power supply	Phase / Frequency / Voltage	Hz / V		1~ / 50 / 220-240	1~ / 50 / 220-240	1~ / 50 / 220-240
Current - 50Hz	Maximum fuse amps (MFA)	A		10	20	20

(1) EER/COP according to Eurovent 2012 (2) The BYCQ140D7W1W has white insulations. Be informed that formation of dirt on white insulation is visibly stronger and that it is consequently not advised to install the BYCQ140D7W1W decoration panel in environments exposed to concentrations of dirt. (3) BYCQ140D7W1 = pure white panel with grey louvers, BYCQ140D7W1W = pure white standard panel with white louvers, BYCQ140D7GW1 = Pure white auto cleaning panel



FCQG100-140F



RZQG100-140L8/7V1/L(8)Y1



BRC1E52A/B BRC7AF532F



- > The round flow cassette provides a more comfortable environment and offers greater savings in energy consumption to shop, office and restaurant owners
- > 360° air discharge ensures uniform air flow and temperature distribution
- > Modern style decoration panel is available in 3 different variations: pure white (RAL9010) auto cleaning panel, pure white (RAL9010) standard panel with grey louvers and pure white (RAL9010) standard panel with white louvers
- > Daikin introduces first auto cleaning cassette to European market.
- > Higher efficiency and comfort thanks to daily auto cleaning of the filter.
- > Lower maintenance costs thanks to auto cleaning function.
- > Easy dust removal with vacuum cleaner without opening the unit.
- > The presence sensor (optional) : adjusts the temperature or switches off the unit when there is nobody in the room - ensures the air flow is directed away from any person detected in the room, when the air flow control is activated
- > The floor sensor (optional) detects the average floor temperature and ensures even temperature distribution between ceiling and floor. Cold feet will become history.
- > Individual flap control: one flap can be easily closed via the wired remote controller (BRC1E52) in case you would refurbish or rearrange your interior
- > Fresh air intake: up to 20 %
- > No optional adapter needed for DIII-connection, link your unit into the wider building management system.

Heating & Cooling



INDOOR UNIT			FCQG71F	FCQG100F	FCQG125F	FCQG140F	FCQG71F	FCQG100F	FCQG125F	FCQG140F	
Cooling capacity	Min./Nom./Max.	kW	-/6.8/-	-/9.5/-	-/12.0/-	-/13.4/-	-/6.8/-	-/9.5/-	-/12.0/-	-/13.4/-	
Heating capacity	Min./Nom./Max.	kW	-/7.5/-	-/10.8/-	-/13.5/-	-/15.5/-	-/7.5/-	-/10.8/-	-/13.5/-	-/15.5/-	
Seasonal efficiency (according to EN14825)	Cooling	Energy label	A++		A+	-	A++		A+	-	
		Pdesign	kW	6.80	9.50	12.00	-	6.80	9.50	12.00	-
		SEER		6.80		6.00	-	6.80		6.00	-
	Heating (Average climate)	Annual energy consumption	kWh	350	488	700	-	350	488	700	-
		Energy label		A+	A++	A+	-	A+	A++	A+	-
		Pdesign	kW	6.33	11.30	12.66	-	6.33	11.30	12.66	-
Nominal efficiency (cooling at 35°/27° nominal load, heating at 7°/20° nominal load)	Annual energy consumption	Energy label	A/A		-	-	A/A		-	-	
		Cooling/Heating									
		Annual energy consumption	kWh	1,005	1,225	1,610	2,085	1,005	1,225	1,610	2,085
Casing	Colour										
		Dimensions	Unit	HeightxWidthxDepth	mm	204x840x840	246x840x840	204x840x840	246x840x840		
Weight	Unit										
		kg	21	24	21	24					
Decoration panel	Model		BYCQ140D7W1 / BYCQ140D7W1W / BYCQ140D7GW1								
	Colour		Pure White (RAL 9010) / Pure White (RAL 9010) / Pure White (RAL 9010)								
	Dimensions	HeightxWidthxDepth	60x950x950 / 950x60x950 / 145x950x950								
	Weight	kg	5.4 / 5.4 / 10.3								
Fan - Air flow rate	Cooling	High/Nom./Low	m ³ /min	15.0/12.1/9.1	22.8/17.6/12.4	26.0/19.2/12.4	15.0/12.1/9.1	22.8/17.6/12.4	26.0/19.2/12.4		
		Heating	m ³ /min	15.0/12.1/9.1	22.8/17.6/12.4	26.0/19.2/12.4	15.0/12.1/9.1	22.8/17.6/12.4	26.0/19.2/12.4		
Sound power level	Cooling	High	dBA	51	54	58	51	54	58		
		Heating	dBA	51	54	58	51	54	58		
Sound pressure level	Cooling	High/Nom./Low	dBA	33/31/28	37/33/29	41/35/29	33/31/28	37/33/29	41/35/29		
		Heating	dBA	33/31/28	37/33/29	41/35/29	33/31/28	37/33/29	41/35/29		
Piping connections	Liquid	OD	mm	9.52							
	Gas	OD	mm	15.9							
Power supply	Phase / Frequency / Voltage	Hz / V	1~ / 50 / 220-240								

OUTDOOR UNIT				RZQG71L8V1	RZQG100L8V1	RZQG125L8V1	RZQG140L7V1	RZQG71L8Y1	RZQG100L8Y1	RZQG125L8Y1	RZQG140LY1
Dimensions	Unit	HeightxWidthxDepth	mm	990x940x320		1,430x940x320		990x940x320		1,430x940x320	
Weight	Unit	kg		78		102		80		101	
Fan - Air flow rate	Cooling	Nom.	m ³ /min	59		70		84		70	
		Heating	m ³ /min	49		62		49		62	
Sound power level	Cooling	Nom.	dBA	64		66		67		69	
Sound pressure level	Cooling	Nom.	dBA	48		50		51		52	
		Heating	dBA	50		52		53		53	
Operation range	Night quiet mode	Level 1	dBA	43		45		43		45	
		Cooling	Ambient	Min.~Max. °CDB	-15~50						
Refrigerant	Heating	Ambient	Min.~Max. °CWB	-20~15.5							
		Type/GWP	R-410A/1,975								
Piping connections	Piping length	OU - IU	Max.	m	50		75		50		75
		System	Equivalent	m	70		90		70		90
		Level difference	IU - OU	Max.	m	30.0					
Power supply	Phase / Frequency / Voltage	Hz / V		1~ / 50 / 220-240				3N~ / 50 / 380-415			
		Maximum fuse amps (MFA)	A	20		32		16		20	

(1) EER/COP according to Eurovent 2012 (2) The BYCQ140D7W1W has white insulations. Be informed that formation of dirt on white insulation is visibly stronger and that it is consequently not advised to install the BYCQ140D7W1W decoration panel in environments exposed to concentrations of dirt. (3) BYCQ140D7W1: pure white standard panel with grey louvers; BYCQ140D7W1W: pure white standard panel with white louvers; BYCQ140D7GW1: pure white auto cleaning panel.



Heating & Cooling

Seasonal Classic



INDOOR UNIT			FCQG71F	FCQG100F	FCQG125F	FCQG140F	FCQG100F	FCQG125F	FCQG140F	
Cooling capacity	Min./Nom./Max.	kW	-/6.8/-	-/9.5/-	-/12.0/-	-/13.4/-	-/9.5/-	-/12.0/-	-/13.4/-	
Heating capacity	Min./Nom./Max.	kW	-/7.5/-	-/10.8/-	-/13.5/-	-/15.5/-	-/10.8/-	-/13.5/-	-/15.5/-	
Seasonal efficiency (according to EN14825)	Cooling	Energy label	A++			A	-	A++	A	-
		Pdesign	kW	6.80	9.50	12.00	-	9.50	12.00	-
		SEER		6.10	6.50	5.30	-	6.50	5.30	-
	Heating (Average climate)	Annual energy consumption	kWh	390	511	792	-	511	792	-
		Energy label		A+			-	A+		-
		Pdesign	kW	6.33	7.60	8.03	-	7.60	8.03	-
		SCOP		4.10		4.01	-	4.10	4.01	-
Nominal efficiency (cooling at 35°/27° nominal load, heating at 7°/20° nominal load)	EER		3.21	3.30	3.21	3.01	3.30	3.21	3.01	
	COP		3.61	3.54		3.41	3.54		3.41	
	Annual energy consumption	kWh	971	1,440	1,870	2,225	1,440	1,870	2,225	
Casing	Energy label	Cooling/Heating	A/A		A/B	-/-		A/B	-/-	
	Colour		-							
Dimensions	Unit	HeightxWidthxDepth	mm	204x840x840		246x840x840				
Weight	Unit		kg	21	24					
Decoration panel	Model			BYCQ140D7W1 / BYCQ140D7W1W / BYCQ140D7GW1						
	Colour			Pure White (RAL 9010) / Pure White (RAL 9010) / Pure White (RAL 9010)						
	Dimensions	HeightxWidthxDepth	mm	60x950x950 / 950x60x950 / 145x950x950						
	Weight		kg	5.4 / 5.4 / 10.3						
Fan - Air flow rate	Cooling	High/Nom./Low	m ³ /min	15.0/12.1/9.1	22.8/17.6/12.4	26.0/19.2/12.4		22.8/17.6/12.4	26.0/19.2/12.4	
	Heating	High/Nom./Low	m ³ /min	15.0/12.1/9.1	22.8/17.6/12.4	26.0/19.2/12.4		22.8/17.6/12.4	26.0/19.2/12.4	
Sound power level	Cooling	High	dBA	51	54	58		54	58	
	Heating	High	dBA	51	54	58		54	58	
Sound pressure level	Cooling	High/Nom./Low	dBA	33/31/28	37/33/29	41/35/29		37/33/29	41/35/29	
	Heating	High/Nom./Low	dBA	33/31/28	37/33/29	41/35/29		37/33/29	41/35/29	
Piping connections	Liquid	OD	mm	9.52						
	Gas	OD	mm	15.9						
Power supply	Phase / Frequency / Voltage	Hz / V	1~ / 50 / 220-240							

OUTDOOR UNIT			RZQSG71L3V1	RZQSG100L8V1	RZQSG125L8V1	RZQSG140L1V1	RZQSG100L8Y1	RZQSG125L8Y1	RZQSG140L1Y1	
Dimensions	Unit	HeightxWidthxDepth	mm	770x900x320	990x940x320		1,430x940x320	990x940x320		
Weight	Unit		kg	67	81	102	82	101	101	
Fan - Air flow rate	Cooling	Nom.	m ³ /min	52	76	77	83	76	77	
	Heating	Nom.	m ³ /min	48	83		62	83	62	
Sound power level	Cooling	Nom.	dBA	65	69	70	69	70	69	
Sound pressure level	Cooling	Nom./Silent operation	dBA	49/47	53/49	54/49	53/49	53/-	54/-	
	Heating	Nom.	dBA	51	57	58	54	57	58	
Operation range	Night quiet mode	Level 1	dBA	-					49	
	Cooling	Ambient Min.~Max.	°CDB	-5.0~46					-5~46	
Refrigerant	Heating	Ambient Min.~Max.	°CWB						-15~15.5	
	Type/GWP			R-410A/1,975						
Piping connections	Piping length	OU - IU	Max. m	30						
	System	Equivalent	m	40						
	Level difference	IU - OU	Max. m	15						
Power supply	IU - IU	Max. m							0.5	
	Phase / Frequency / Voltage	Hz / V		1~ / 50 / 220-240				3N~ / 50 / 380-415		
Current - 50Hz	Maximum fuse amps (MFA)	A	20	32			20			

(1) EER/COP according to Eurovent 2012 (2) The BYCQ140D7W1W has white insulations. Be informed that formation of dirt on white insulation is visibly stronger and that it is consequently not advised to install the BYCQ140D7W1W decoration panel in environments exposed to concentrations of dirt. (3) BYCQ140D7W1: pure white standard panel with grey louvers; BYCQ140D7W1W: pure white standard panel with white louvers; BYCQ140D7GW1: pure white auto cleaning panel.



FCQHG71-140F



RZQG100-140L8/7V1/L(8)Y1



BRC1E52A/B

BRC7F532F



- › High COP cassette ensures top energy performance
- › The round flow cassette provides a more comfortable environment and offers greater savings in energy consumption to shop, office and restaurant owners
- › 360° air discharge ensures uniform air flow and temperature distribution
- › Modern style decoration panel is available in 3 different variations: pure white (RAL9010) auto cleaning panel, pure white (RAL9010) standard panel with grey louvers and pure white (RAL9010) standard panel with white louvers
- › Daikin introduces first auto cleaning cassette to European market.
- › Higher efficiency and comfort thanks to daily auto cleaning of the filter.
- › Lower maintenance costs thanks to auto cleaning function.
- › Easy dust removal with vacuum cleaner without opening the unit.
- › The presence sensor (optional) : adjusts the temperature or switches off the unit when there is nobody in the room - ensures the air flow is directed away from any person detected in the room, when the air flow control is activated
- › The floor sensor (optional) detects the average floor temperature and ensures even temperature distribution between ceiling and floor. Cold feet will become history.
- › Individual flap control: one flap can be easily closed via the wired remote controller (BRC1E52) in case you would refurbish or rearrange your interior
- › Fresh air intake: up to 20 %
- › No optional adapter needed for DIII-connection, link your unit into the wider building management system.

Heating & Cooling



INDOOR UNIT			FCQHG71F	FCQHG100F	FCQHG125F	FCQHG140F	FCQHG71F	FCQHG100F	FCQHG125F	FCQHG140F		
Cooling capacity	Min./Nom./Max.	kW	-/6.8/-	-/9.5/-	-/12.0/-	-/13.4/-	-/6.8/-	-/9.5/-	-/12.0/-	-/13.4/-		
Heating capacity	Min./Nom./Max.	kW	-/7.5/-	-/10.8/-	-/13.5/-	-/15.5/-	-/7.5/-	-/10.8/-	-/13.5/-	-/15.5/-		
Seasonal efficiency (according to EN14825)	Cooling	Energy label	A++									
		Pdesign kW	6.80	9.50	12.00	-	6.80	9.50	12.00	-		
		SEER	7.00		6.61	-	7.00		6.61	-		
	Heating (Average climate)	Annual energy consumption kWh	340	475	635	-	340	475	635	-		
		Energy label	A+		A++		A+		A++			
		Pdesign kW	7.60	11.30	12.66	-	7.60	11.30	12.66	-		
Nominal efficiency (cooling at 35°/27° nominal load, heating at 7°/20° nominal load)	Annual energy consumption kWh	SCOP	4.54	4.80	4.63	-	4.54	4.63	-			
		EER	4.09	4.42	4.00	3.35	4.09	4.42	4.00	3.35		
		COP	4.80	4.99	4.40	4.12	4.80	4.99	4.40	4.12		
Casing	Energy label	Cooling/Heating		A/A		A/A		A/A				
	Colour	-										
Dimensions	Unit	HeightxWidthxDepth	mm									
Weight	Unit	kg	25	26		25		26				
Decoration panel	Model	BYCQ140D7W1 / BYCQ140D7W1W / BYCQ140D7GW1										
	Colour	Pure White (RAL 9010) / Pure White (RAL 9010) /										
	Dimensions	HeightxWidthxDepth	mm									
Fan - Air flow rate	Cooling	High/Nom./Low	m³/min	21.2/16.7/12.2	32.3/25.7/19.0	33.5/26.7/19.9	33.5/27.3/21.1	21.2/16.7/12.2	32.3/25.7/19.0	33.5/26.7/19.9	33.5/27.3/21.1	
		Heating	High/Nom./Low	m³/min	21.2/16.7/12.2	32.3/25.7/19.0	33.5/26.7/19.9	33.5/27.3/21.1	21.2/16.7/12.2	32.3/25.7/19.0	33.5/26.7/19.9	33.5/27.3/21.1
		Weight	kg	5.4 / 5.4 / 10.3								
Sound power level	Cooling	High	dBA	53	61		53		61			
	Heating	High	dBA	53	61		53		61			
Sound pressure level	Cooling	High/Nom./Low	dBA	36/33/29	44/39/33	45/40/35	45/41/37	36/33/29	44/39/33	45/40/35	45/41/37	
	Heating	High/Nom./Low	dBA	36/33/29	44/39/33	45/40/35	45/41/37	36/33/29	44/39/33	45/40/35	45/41/37	
Piping connections	Liquid	OD	mm	9.52								
	Gas	OD	mm	15.9								
Power supply	Phase / Frequency / Voltage	Hz / V	1~ / 50 / 220-240									

OUTDOOR UNIT				RZQG71L8V1	RZQG100L8V1	RZQG125L8V1	RZQG140L7V1	RZQG71L8Y1	RZQG100L8Y1	RZQG125L8Y1	RZQG140LY1	
Dimensions	Unit	HeightxWidthxDepth	mm	990x940x320		1,430x940x320		990x940x320		1,430x940x320		
Weight	Unit	kg	78	102		80		101		84		
Fan - Air flow rate	Cooling	Nom.	m³/min	59	70		84		70		84	
	Heating	Nom.	m³/min	49	62		49		62		49	
Sound power level	Cooling	Nom.	dBA	64	66		67		69		64	
Sound pressure level	Cooling	Nom.	dBA	48	50		51		52		48	
	Heating	Nom.	dBA	50	52		53		50		52	
	Night quiet mode	Level 1	dBA	43	45		43		45		43	
Operation range	Cooling	Ambient	Min.-Max. °CDB	-15~50								
	Heating	Ambient	Min.-Max. °CWB	-20~15.5								
Refrigerant	Type/GWP	R-410A/1,975										
Piping connections	Piping length	OU - IU	Max. m	50	75		50		75		50	
		System	Equivalent m	70	90		70		90		70	
	Level difference	IU - OU	Max. m	30.0								
Power supply	Phase / Frequency / Voltage	Hz / V	Maximum fuse amps (MFA)	A		1~ / 50 / 220-240		16		3N~ / 50 / 380-415		
			Current - 50Hz	20	32		20		20			

(1) EER/COP according to Eurovent 2012. (2) The BYCQ140D7W1W has white insulations. Be informed that formation of dirt on white insulation is visibly stronger and that it is consequently not advised to install the BYCQ140D7W1W decoration panel in environments exposed to concentrations of dirt. (3) BYCQ140D7W1: pure white standard panel with grey louvers; BYCQ140D7W1W: pure white standard panel with white louvers; BYCQ140D7GW1: pure white auto cleaning panel



Heating & Cooling



INDOOR UNIT			FCQHG71F	FCQHG100F	FCQHG125F	FCQHG140F	FCQHG100F	FCQHG125F	FCQHG140F	
Cooling capacity	Min./Nom./Max.	kW	-/6.8/-	-/9.5/-	-/12.0/-	-/13.4/-	-/9.5/-	-/12.0/-	-/13.4/-	
Heating capacity	Min./Nom./Max.	kW	-/7.5/-	-/10.8/-	-/13.5/-	-/15.5/-	-/10.8/-	-/13.5/-	-/15.5/-	
Seasonal efficiency (according to EN14825)	Cooling	Energy label	A++			A	-	A++	A	-
		Pdesign	kW	6.80	9.50	12.00	-	9.50	12.00	-
		SEER		6.50	6.70	5.40	-	6.70	5.40	-
	Heating (Average climate)	Annual energy consumption	kWh	366	496	777	-	496	777	-
		Energy label		A+			-	A+		
		Pdesign	kW	7.60	8.03		-	8.03		-
Nominal efficiency (cooling at 35°/27° nominal load, heating at 7°/20° nominal load)	EER		3.50	3.70	3.23	3.21	3.70	3.23	3.21	
	COP		4.10	4.30	3.75	3.61	4.30	3.75	3.61	
	Annual energy consumption	kWh	1,059	1,285	1,855	2,085	1,285	1,855	2,085	
Casing	Energy label	Cooling/Heating	A/A			-/-	A/A			
	Colour		-							
Dimensions	Unit	HeightxWidthxDepth	mm							
Weight	Unit		25	26			26			
Decoration panel 1	Model		BYCQ140D7W1 / BYCQ140D7W1W / BYCQ140D7GW1							
Decoration panel 2	Colour		Pure White (RAL 9010) / Pure White (RAL 9010) / Pure White (RAL 9010)							
Decoration panel 3	Dimensions	HeightxWidthxDepth	mm							
	Weight		kg							
Fan - Air flow rate	Cooling	High/Nom./Low	m³/min	21.2/16.7/12.2	32.3/25.7/19.0	33.5/26.7/19.9	33.5/27.3/21.1	32.3/25.7/19.0	33.5/26.7/19.9	33.5/27.3/21.1
	Heating	High/Nom./Low	m³/min	21.2/16.7/12.2	32.3/25.7/19.0	33.5/26.7/19.9	33.5/27.3/21.1	32.3/25.7/19.0	33.5/26.7/19.9	33.5/27.3/21.1
Sound power level	Cooling	High	dBA	53	61			61		
	Heating	High	dBA	53	61			61		
Sound pressure level	Cooling	High/Nom./Low	dBA	36/33/29	44/39/33	45/40/35	45/41/37	44/39/33	45/40/35	45/41/37
	Heating	High/Nom./Low	dBA	36/33/29	44/39/33	45/40/35	45/41/37	44/39/33	45/40/35	45/41/37
Piping connections	Liquid	OD	mm	9.52						
	Gas	OD	mm	15.9						
Power supply	Phase / Frequency / Voltage	Hz / V	1~ / 50 / 220-240							

OUTDOOR UNIT			RZQSG71L3V1	RZQSG100L8V1	RZQSG125L8V1	RZQSG140L1V1	RZQSG100L8Y1	RZQSG125L8Y1	RZQSG140LY1	
Dimensions	Unit	HeightxWidthxDepth	mm	770x900x320	990x940x320	1,430x940x320	990x940x320	1,430x940x320	1,430x940x320	
Weight	Unit		kg	67	81	102	82	101	101	
Fan - Air flow rate	Cooling	Nom.	m³/min	52	76	77	83	76	77	83
	Heating	Nom.	m³/min	48	83	62	83	77	62	
Sound power level	Cooling	Nom.	dBA	65	69	70	69	70	69	
Sound pressure level	Cooling	Nom./Silent operation	dBA	49/47	53/49	54/49	53/49	53/-	54/-	53/-
	Heating	Nom.	dBA	51	57	58	54	57	58	54
	Night quiet mode	Level 1	dBA	-			49			
Operation range	Cooling	Ambient	Min.-Max.	-5.0~46			-5~46			
	Heating	Ambient	Min.-Max.	-15~15.5			-15~15.5			
Refrigerant	Type/GWP		R-410A/1,975							
Piping connections	Piping length	OU - IU	Max.	m	30	50				
	System	Equivalent	m	40	70					
	Level difference	IU - OU	Max.	m	15	30.0				
Power supply	IU - IU	Max.	m	0.5						
	Phase / Frequency / Voltage	Hz / V		1~ / 50 / 220-240			3N~ / 50 / 380-415			
Current - 50Hz	Maximum fuse amps (MFA)	A	20	32			20			

(1) EER/COP according to Eurovent 2012 (2) The BYCQ140D7W1W has white insulations. Be informed that formation of dirt on white insulation is visibly stronger and that it is consequently not advised to install the BYCQ140D7W1W decoration panel in environments exposed to concentrations of dirt. (3) BYCQ140D7W1: pure white standard panel with grey louvers; BYCQ140D7W1W: pure white standard panel with white louvers; BYCQ140D7GW1: pure white auto cleaning panel.



FFQ-C (white panel)



FFQ-C (silver and white panel)



RXS25-35K



BRC1E52A/B

BRC7F530W



- Unique design in the market: integrates fully flat into the ceiling and fits flush into architectural ceiling modules
- Remarkable blend of iconic design and engineering excellence with an elegant finish in white or a combination of silver and white
- The presence sensor (optional) adjusts the set point with standard 1°C if no one is detected in the room, it is possible to adjust the set point with 2, 3 or 4°C (optional). It also automatically directs air flow away from any person to avoid draught.
- The floor sensor (optional) detects the average floor temperature and ensures even temperature distribution between ceiling and floor. Cold feet will become history.
- Individual flap control: one flap can be easily closed via the wired remote controller (BRC1E52) in case you would refurbish or rearrange your interior
- Low energy consumption thanks to specially developed small tube heat exchanger, DC fan motor and drain pump
- Fresh air intake for healthy living
- No optional adapter needed for DIII-connection, link your unit into the wider building management system.



Heating & Cooling

INDOOR UNIT			FFQ25C	FFQ35C	FFQ50C	FFQ60C	
Cooling capacity	Min./Nom./Max.	kW	-2.50/-	-3.40/-	-5.00/-	-5.70/-	
Heating capacity	Min./Nom./Max.	kW	-3.20/-	-4.20/-	-5.80/-	-7.00/-	
Seasonal efficiency (according to EN14825)	Cooling	Energy label	A		A+		
		Pdesign	2.50	3.40	5.00	5.70	
		SEER	5.25	5.60	5.70	5.60	
	Heating (Average climate)	Annual energy consumption	kWh	167	212	307	356
		Energy label	A+				
		Pdesign	kW	2.31	3.45	3.84	3.96
Nominal efficiency (cooling at 35°/27° nominal load, heating at 7°/20° nominal load)	SCOP		4.12	4.09	4.10	4.17	
	Annual energy consumption	kWh	784	1,182	1,311	1,329	
	EER		4.46	3.70	3.21	3.02	
	COP		3.81	3.41	3.49	3.41	
Casing	Colour		A/A				
	Dimensions	HeightxWidthxDepth mm	-				
Weight	Unit	kg	16		17.5		
	Decorations panel	Model	BYFQ60CW / BYFQ60CS / BYFQ60B2				
Fan - Air flow rate	Cooling	High/Nom./Low	m³/min		12/10/7.5		
		High/Nom./Low	m³/min		14.5/12.5/9.5		
	Heating	High/Nom./Low	m³/min		12/10/7.5/-		
		High/Nom./Low	m³/min		14.5/12.5/9.5/-		
Sound power level	Cooling	High	dBA		56		
	Heating	High	dBA		60		
Sound pressure level	Cooling	High/Nom./Low	dBA		31/28.5/25		
	Heating	High/Nom./Low	dBA		34/30.5/25		
Piping connections	Liquid	OD	mm		6.35		
	Gas	OD	mm		9.52		
Power supply	Phase / Frequency / Voltage		Hz / V		1~ / 50 / 220-240		

OUTDOOR UNIT			RXS25K	RXS35K	RXS50K	RXS60F
Dimensions	Unit	HeightxWidthxDepth mm	550x765x285		735x825x300	
Weight	Unit	kg	34		47	
Fan - Air flow rate	Cooling	High/Nom./Low/Super low	m³/min		33.5/33.5/30.1/-	
	Heating	High/Low/Super low	m³/min		36.0/36.0/-/30.1	
Sound power level	Cooling	Nom./High	dBA		50.9/50.9/-/48.9	
	Heating	Nom./High	dBA		50.9/50.9/42.4/-	
Sound pressure level	Cooling	High/Low/Silent operation	dBA		28.3/25.6/-	
	Heating	High/Low/Silent operation	dBA		28.3/-/25.6	
Operation range	Cooling	Ambient Min.~Max.	°CDB		45.0/-/43.1	
	Heating	Ambient Min.~Max.	°CWB		46.3/42.4/-	
Refrigerant	Type/GWP	R-410A/1,975				
Piping connections	Piping length	OU - IU Max.	m		20	
	Level difference	IU - OU Max.	m		15	
Power supply	Phase / Frequency / Voltage		Hz / V		1~ / 50 / 220-240	
Current - 50Hz	Maximum fuse amps (MFA)		A		-	
					10	
					20	

(1) EER/COP according to Eurovent 2012 (2) Dimensions do not include control box



FBQ-C8 / RZQG-L8/7V1/L(8)Y1 Concealed ceiling unit with inverter driven fan



FBQ100-140C8



RZQG100-140L8/7V1/L(8)Y1



BRC1E52A/B

BRC4C65



SEASONAL EFFICIENCY
Smart use of energy

- › Blends unobtrusively with any interior décor: only the suction and discharge grilles are visible
- › Easy installation thanks to automatic air flow adjustment towards nominal air flow rate
- › Reduction in power consumption thanks to DC inverter fans
- › Possibility to change ESP via wired remote control allows optimisation of the supply air volume
- › Up to 120Pa external static pressure facilitates using flexible ducts of varying lengths: ideal for shops and medium size offices
- › Whisper quiet operation: down to 29dBA sound pressure level
- › No optional adapter needed for DIII-connection, link your unit into the wider building management system.
- › The air suction direction can be altered from rear to bottom suction
- › Standard built-in drain pump increases reliability of the drain system

Heating & Cooling

Seasonal Smart

INDOOR UNIT			FBQ71C8	FBQ100C8	FBQ125C8	FBQ140C8	FBQ71C8	FBQ100C8	FBQ125C8	FBQ140C8		
Cooling capacity	Min./Nom./Max.	kW	-/6.8/-	-/9.5/-	-/12.0/-	-/13.4/-	-/6.8/-	-/9.5/-	-/12.0/-	-/13.4/-		
Heating capacity	Min./Nom./Max.	kW	-/7.5/-	-/10.8/-	-/13.5/-	-/15.5/-	-/7.5/-	-/10.8/-	-/13.5/-	-/15.5/-		
Seasonal efficiency (according to EN14825)	Cooling	Energy label	A++		A+		-		A+			
		Pdesign	kW	6.80	9.50	12.00	-	6.80	9.50	12.00	-	
		SEER		6.11	5.80	5.81	-	6.11	5.80	5.81	-	
		Annual energy consumption	kWh	389	573	722	-	389	573	722	-	
	Heating (Average climate)	Energy label	A+		A++		-		A++		A+	
		Pdesign	kW	6.00	11.30	12.71	-	6.00	11.30	12.71	-	
		SCOP		4.01	4.61	4.21	-	4.01	4.61	4.21	-	
		Annual energy consumption	kWh	2,094	3,431	4,226	-	2,094	3,431	4,226	-	
Nominal efficiency (cooling at 35°/27° nominal load, heating at 7°/20° nominal load)	EER		3.50	3.89	3.81	3.33	3.50	3.89	3.81	3.33		
	COP		3.65	4.21	3.83	3.61	3.65	4.21	3.83	3.61		
	Annual energy consumption	kWh	970	1,220	1,575	2,010	970	1,220	1,575	2,010		
	Energy label	Cooling/Heating	A/A			-/		A/A		-/		
Casing	Colour	Not painted (galvanised)										
Dimensions	Unit	HeightxWidthxDepth	mm	300x1,000x700	300x1,400x700			300x1,000x700			300x1,400x700	
Required ceiling void	>	mm	350									
Weight	Unit	kg	34	45			34	45				
Decoration panel	Model	BYB571DJW1		BYB5125DJW1			BYB571DJW1		BYB5125DJW1			
	Colour	White (10Y9/0.5)										
	Dimensions	HeightxWidthxDepth	mm	55x1,100x500	55x1,500x500			55x1,100x500		55x1,500x500		
	Weight	kg	4.5	6			4.5		6			
Fan - Air flow rate	Cooling	High/Low	m³/min	18/15	32/23	39/28		18/15	32/23	39/28		
	Heating	High/Low	m³/min	18/15	32/23	39/28	41/29	18/15	32/23	39/28	41/29	
Fan - External static pressure	High/Nom.	Pa	100/30	120/40	120/50		100/30	120/40	120/50			
Sound power level	Cooling	Nom.	dBA	57	61	66		57	61	66		
	Heating	Nom.	dBA	37/29	38/32	40/33		37/29	38/32	40/33		
Sound pressure level	Cooling	High/Low	dBA	37/29	38/32	40/33		37/29	38/32	40/33		
	Heating	High/Low	dBA	37/29	38/32	40/33	41/34	37/29	38/32	40/33	41/34	
Piping connections	Liquid	OD	mm	9.52								
	Gas	OD	mm	15.9								
Power supply	Phase / Frequency / Voltage	Hz / V	1~ / 50/60 / 220-240/220									

OUTDOOR UNIT			RZQG71L8V1	RZQG100L8V1	RZQG125L8V1	RZQG140L7V1	RZQG71L8Y1	RZQG100L8Y1	RZQG125L8Y1	RZQG140LY1	
Dimensions	Unit	HeightxWidthxDepth	mm	990x940x320	1,430x940x320			990x940x320	1,430x940x320		
Weight	Unit	kg	78	102			80	101			
Fan - Air flow rate	Cooling	Nom.	m³/min	59	70		84	59	70		84
	Heating	Nom.	m³/min	49	62			49	62		
Sound power level	Cooling	Nom.	dBA	64	66	67	69	64	66	67	69
	Heating	Nom.	dBA	48	50	51	52	48	50	51	52
Sound pressure level	Heating	Nom.	dBA	50	52	53		50	52	53	
	Night quiet mode	Level 1	dBA	43	45			43	45		
Operation range	Cooling	Ambient	Min.~Max. °CDB	-15~50							
	Heating	Ambient	Min.~Max. °CWB	-20~-15.5							
Refrigerant	Type/GWP	R-410A/1,975									
Piping connections	Piping length	OU - IU	Max. m	50	75			50	75		
	System	Equivalent	m	70	90			70	90		
	Level difference	IU - OU	Max. m	30.0							
Power supply	IU - IU	Max. m	0.5								
	Phase / Frequency / Voltage	Hz / V	1~ / 50 / 220-240				3N~ / 50 / 380-415				
Current - 50Hz	Maximum fuse amps (MFA)	A	20	32			16	20			

(1) EER/COP according to Eurovent 2012



Heating & Cooling

Seasonal Classic



INDOOR UNIT			FBQ71C8	FBQ100C8	FBQ125C8	FBQ140C8	FBQ100C8	FBQ125C8	FBQ140C8			
Cooling capacity	Min./Nom./Max.	kW	-/6.8/-	-/9.5/-	-/12.0/-	-/13.4/-	-/9.5/-	-/12.0/-	-/13.4/-			
Heating capacity	Min./Nom./Max.	kW	-/7.5/-	-/10.8/-	-/13.5/-	-/15.5/-	-/10.8/-	-/13.5/-	-/15.5/-			
Seasonal efficiency (according to EN14825)	Cooling	Energy label	A+		A		A		-			
		Pdesign	6.80	9.50	12.00	-	9.50	12.00	-	-		
		SEER	5.81	5.50	5.20	-	5.50	5.20	-	-		
		Annual energy consumption	kWh	410	604	807	-	604	807	-	-	
	Heating (Average climate)	Energy label	A		A+		A		A		-	
		Pdesign	6.00	7.60		-		7.60		-		
		SCOP	3.88	4.01	3.90	-	4.01	3.90	-	-		
Nominal efficiency (cooling at 35°/27° nominal load, heating at 7°/20° nominal load)	EER		3.28	3.31	3.21	3.02	3.31	3.21	3.02			
	COP		3.61	3.65	3.51	3.41	3.65	3.51	3.41			
	Annual energy consumption	kWh	1,037	1,435	1,870	2,220	1,435	1,870	2,220			
	Energy label	Cooling/Heating	A/A		A/B		-/		A/A			
Casing	Colour	Not painted (galvanised)										
Dimensions	Unit	HeightxWidthxDepth	300x1,000x700		300x1,400x700							
Required ceiling void >		mm	350									
Weight	Unit	kg	34		45							
Decoration panel	Model		BYB571DJW1		BYB5125DJW1							
	Colour		White (10Y9/0.5)									
	Dimensions	HeightxWidthxDepth	55x1,100x500		55x1,500x500							
Fan - Air flow rate	Cooling	High/Low	m³/min	18/15	32/23	39/28	32/23	39/28	41/29			
	Heating	High/Low	m³/min	18/15	32/23	39/28	41/29	32/23	39/28			
Fan - External static pressure	High/Nom.		Pa	100/30	120/40	120/50	120/40	120/50	120/50			
Sound power level	Cooling	Nom.	dBA	57	61	66	61	66	66			
	Heating	High/Low	dBA	37/29	38/32	40/33	38/32	40/33	41/34			
Sound pressure level	Cooling	High/Low	dBA	37/29	38/32	40/33	41/34	38/32	40/33			
	Heating	High/Low	dBA	37/29	38/32	40/33	41/34	38/32	40/33			
Piping connections	Liquid	OD	mm	9.52								
	Gas	OD	mm	15.9								
Power supply	Phase / Frequency / Voltage	Hz / V	1~ / 50/60 / 220-240/220									

OUTDOOR UNIT			RZQSG71L3V1	RZQSG100L8V1	RZQSG125L8V1	RZQSG140LV1	RZQSG100L8Y1	RZQSG125L8Y1	RZQSG140LY1
Dimensions	Unit	HeightxWidthxDepth	770x900x320	990x940x320		1,430x940x320	990x940x320		
Weight	Unit	kg	67	81	102	82	82	101	101
Fan - Air flow rate	Cooling	Nom.	m³/min	52	76	77	83	76	77
	Heating	Nom.	m³/min	48	83	62	83	62	62
Sound power level	Cooling	Nom.	dBA	65	69	70	69	70	69
	Heating	Nom./Silent operation	dBA	49/47	53/49	54/49	53/49	53/-	54/-
Sound pressure level	Heating	Nom.	dBA	51	57	58	54	57	58
	Night quiet mode	Level 1	dBA	-		-		49	
Operation range	Cooling	Ambient	Min.~Max. °CDB	-5.0~46		-5~46			
	Heating	Ambient	Min.~Max. °CWB	-15~15.5					
Refrigerant	Type/GWP		R-410A/1,975						
Piping connections	Piping length	OU - IU	Max. m	30	50				
	System	Equivalent	m	40	70				
	Level difference	IU - OU	Max. m	15	30.0				
Power supply	IU - IU	Max. m	0.5						
	Phase / Frequency / Voltage	Hz / V	1~ / 50 / 220-240				3N~ / 50 / 380-415		
Current - 50Hz	Maximum fuse amps (MFA)	A	20	32		20			

(1) EER/COP according to Eurovent 2012



FBQ35-50C8



RXS35K



BRC1E52A/B

BRC4C65



SEASONAL EFFICIENCY
Smart use of energy

- > Blends unobtrusively with any interior décor: only the suction and discharge grilles are visible
- > Easy installation thanks to automatic air flow adjustment towards nominal air flow rate
- > Reduction in power consumption thanks to DC inverter fans
- > Possibility to change ESP via wired remote control allows optimisation of the supply air volume
- > Up to 120Pa external static pressure facilitates using flexible ducts of varying lengths: ideal for shops and medium size offices
- > Whisper quiet operation: down to 29dBA sound pressure level
- > No optional adapter needed for DIII-connection, link your unit into the wider building management system.
- > The air suction direction can be altered from rear to bottom suction
- > Standard built-in drain pump increases reliability of the drain system



Heating & Cooling

INDOOR UNIT				FBQ35C8	FBQ50C8	FBQ60C8
Cooling capacity	Min./Nom./Max.		kW	-/3.40/-	-/5.00/-	-/5.70/-
Heating capacity	Min./Nom./Max.		kW	-/4.00/-	-/5.50/-	-/7.00/-
Seasonal efficiency (according to EN14825)	Cooling	Energy label		C	B	A
		Pdesign	kW	3.50	4.90	6.00
		SEER		4.33	4.96	5.17
	Annual energy consumption		kWh	283	346	406
	Heating (Average climate)	Energy label		A	A	A
		Pdesign	kW	2.90	4.50	4.80
SCOP			3.56	3.53	3.43	
Annual energy consumption		kWh	1,141	1,782	1,960	
Nominal efficiency (cooling at 35°/27° nominal load, heating at 7°/20° nominal load)	EER			3.21	3.03	3.26
	COP			3.51	3.42	3.71
	Annual energy consumption		kWh	530	825	875
Energy label		Cooling/Heating		A/B	B/B	A/B
Casing	Colour		Not painted (galvanised)			
Dimensions	Unit	HeightxWidthxDepth	mm	300x700x700		300x1,000x700
Required ceiling void >			mm	350		
Weight	Unit			kg	25	34
Decoration panel	Model		BYBS45DJW1			BYBS71DJW1
	Colour		White (10Y9/0.5)			
	Dimensions	HeightxWidthxDepth	mm	55x800x500		55x1,100x500
	Weight			kg	3	4.5
Fan - Air flow rate	Cooling	High/Low	m³/min	16/11		18/15
	Heating	High/Nom.	m³/min	16/-		18/-
Fan - External static pressure	High/Nom.		Pa	100/30		
Sound power level	Cooling	Nom.		dB(A)	63	57
Sound pressure level	Cooling	High/Low		dB(A)	37/29	
	Heating	High/Low		dB(A)	37/29	
Piping connections	Liquid	OD	mm	6.35		
	Gas	OD	mm	9.5	12.7	
Power supply	Phase / Frequency / Voltage		Hz / V	1~ / 50/60 / 220-240/220		

OUTDOOR UNIT				RXS35K	RXS50K	RXS60F
Dimensions	Unit	HeightxWidthxDepth	mm	550x765x285	735x825x300	735x825x300
Weight	Unit			kg	34	47
Fan - Air flow rate	Cooling	High/Low	m³/min	36.0/30.1	50.9/48.9	50.9/42.4
	Heating	High/Low	m³/min	28.3/25.6	45.0/43.1	46.3/42.4
Sound power level	Cooling	Nom./High		dB(A)	-/63	
Sound pressure level	Cooling	High/Low		dB(A)	48/44	
	Heating	High/Low		dB(A)	48/45	
Operation range	Cooling	Ambient	Min.-Max. °CDB	-10~46		-10~46
	Heating	Ambient	Min.-Max. °CWB	-15~18		-15~18
Refrigerant	Type/GWP		R-410A/1,975			
Piping connections	Piping length	OU - IU	Max.	m	20	30
	Level difference	IU - OU	Max.	m	15	20
Power supply	Phase / Frequency / Voltage		Hz / V	1~ / 50 / 220-240	1~ / 50 / 220-240	1~ / 50 / 220-240
Current - 50Hz	Maximum fuse amps (MFA)		A	10	20	20

(1) EER/COP according to Eurovent 2012



FDBQ25B



BRC1E52A/B

- > Designed for hotel bedrooms
- > Blends unobtrusively with any interior décor: only the suction and discharge grilles are visible
- > Compact dimensions (230mm high & 652mm deep), can easily be mounted in a ceiling void
- > Whisper quiet operation: down to 28dBA sound pressure level
- > The air suction direction can be altered from rear to bottom suction



Heating & Cooling

INDOOR UNIT				FDBQ25B
Cooling capacity	Nom.		kW	-
Casing	Colour			-
Dimensions	Unit	HeightxWidthxDepth	mm	230x652x502
Weight	Unit		kg	17.0
Fan - Air flow rate	Cooling	High/Low	m ³ /min	6.50/5.20
	Heating	High/Low/Silent operation	m ³ /min	6.95/5.20/-
Sound power level	Cooling	High/Low	dBA	55.0/49.0
	Heating	High/Low	dBA	55.0/49.0
Sound pressure level	Cooling	High/Low	dBA	35.0/28.0
	Heating	High/Low	dBA	35.0/29.0
Piping connections	Liquid	OD	mm	6.35
	Gas	OD	mm	9.52
	Drain			27.2
Power supply	Phase / Frequency / Voltage		Hz / V	1~ / 50 / 230
OUTDOOR UNIT				only available in multi model application
Dimensions	Unit	HeightxWidthxDepth	mm	
Weight	Unit		kg	
Fan - Air flow rate	Cooling	High/Nom./Low	m ³ /min	
	Heating	High/Nom./Low	m ³ /min	
Sound power level	Cooling	Nom.	dBA	
Sound pressure level	Cooling	Nom.	dBA	
	Heating	Nom.	dBA	
Operation range	Cooling	Ambient	Min.-Max. °CDB	
	Heating	Ambient	Min.-Max. °CWB	
Refrigerant	Type/GWP			
Power supply	Phase / Frequency / Voltage		Hz / V	
Current - 50Hz	Maximum fuse amps (MFA)		A	



FDQ125C



RZQG125L8V1/Y1



BRC1E52A/B



SEASONAL EFFICIENCY
Smart use of energy

- > Blends unobtrusively with any interior décor: only the suction and discharge grilles are visible
- > Easy installation thanks to automatic air flow adjustment towards nominal air flow rate
- > Reduction in power consumption thanks to DC inverter fans
- > Improved comfort thanks to 3-step air flow control
- > Up to 200Pa external static pressure allows extensive ductwork runs and flexible application: ideal for use in large areas
- > Less duct calculations are needed; moreover, the air flow can be adjusted during installation via the wired remote control (optional) instead of via channel adjustments
- > No optional adapter needed for DIII-connection, link your unit into the wider building management system.
- > The air suction direction can be altered from rear to bottom suction
- > Standard drain pump with 625mm lift



Heating & Cooling

Seasonal Smart

INDOOR UNIT				FDQ125C	FDQ125C	FDQ125C	FDQ125C	
Cooling capacity	Min./Nom./Max.					-/12.0/-		
Heating capacity	Min./Nom./Max.					-/13.5/-		
Seasonal efficiency (according to EN14825)	Cooling	Energy label		A+			A	
		Pdesign			12.00			
		SEER		5.81			5.20	
	Heating (Average climate)	Annual energy consumption		722			807	
		Energy label		A+			A	
		Pdesign		12.71			7.60	
Nominal efficiency (cooling at 35°/27° nominal load, heating at 7°/20° nominal load)	Annual energy consumption	Energy label		4.21		4.21	3.90	
		SCOP		4,226		2,728	3.21	
		COP		3.75		3.83	3.51	
Casing	Colour	Annual energy consumption		1,600		1,870	1,600	
		Energy label	Cooling/Heating	A/A			A/B	
Dimensions	Unit	HeightxWidthxD	Depth	Not painted (galvanised)				
Required ceiling void >	Unit			300x1,400x700				
Weight	Unit			350				
Decoration panel	Model	Colour		BYBS125DJW1				
		Dimensions		White (10Y9/0.5)				
		HeightxWidthxD		55x1,500x500				
		Weight		6.5				
Fan - Air flow rate	Cooling	High/Low		39/28				
	Heating	High/Low		39/28				
Fan - External static pressure	High/Nom.			200/50				
Sound power level	Cooling	Nom.		66				
Sound pressure level	Cooling	High/Low		40/33				
	Heating	High/Low		40/33				
Piping connections	Liquid	OD		9.52				
	Gas	OD		15.9				
Power supply	Phase / Frequency / Voltage			1~ / 50/60 / 220-240/220				

OUTDOOR UNIT				RZQG125L8V1	RZQG125L8Y1	RZQSG125L8V1	RZQSG125L8Y1
Dimensions	Unit	HeightxWidthxD	Depth	1,430x940x320		990x940x320	
Weight	Unit			102	101	81	82
Fan - Air flow rate	Cooling	Nom.		70		77	
	Heating	Nom.		62		83	
Sound power level	Cooling	Nom.		67		70	
Sound pressure level	Cooling	Nom.		51		54/49	54/-
	Heating	Nom.		53		58	
Operation range	Night quiet mode	Level 1		45		-	49
	Cooling	Ambient	Min.-Max.	-15~50		-5~46	
Refrigerant	Heating	Ambient	Min.-Max.	-20~15.5		-15~15.5	
	Type/GWP			R-410A/1,975			
Piping connections	Piping length	OU - IU	Max.	75		50	
		System	Equivalent	90		70	
	Level difference	IU - OU	Max.			30.0	
Power supply	IU - IU	Max.			0.5		
	Phase / Frequency / Voltage			1~ / 50 / 220-240	3N~ / 50 / 380-415	1~ / 50 / 220-240	3N~ / 50 / 380-415
Current - 50Hz	Maximum fuse amps (MFA)			32	20	32	20

(1) EER/COP according to Eurovent 2012



FDQ200-250B



RZQ200-250C



BRC1E52A/B

- > Blends unobtrusively with any interior décor: only the suction and discharge grilles are visible
- > Up to 250Pa external static pressure allows extensive ductwork runs and flexible application: ideal for use in large areas
- > Up to 26.4kW in heating mode
- > Standard built-in drain pump increases reliability of the drain system



Heating & Cooling



INDOOR UNIT				FDQ200B	FDQ250B
Cooling capacity	Min./Nom./Max.		kW	-/20.0/-	-/24.1/-
Heating capacity	Min./Nom./Max.		kW	-/23.0/-	-/26.4/-
Nominal efficiency (cooling at 35°/27° nominal load, heating at 7°/20° nominal load)	EER			3.21	2.81
	COP			3.41	3.21
Annual energy consumption			kWh	3,115	4,290
Energy label		Cooling/Heating		-/-	
Casing	Colour			Unpainted	
Dimensions	Unit	HeightxWidthxDepth	mm	450x1,400x900	
Required ceiling void >				450	
Weight	Unit		kg	89.0	94.0
Fan - Air flow rate	Cooling	Nom.	m³/min	69.0	89.0
Fan - External static pressure	High/Nom./Low		Pa	250/250/250	
Sound power level	Cooling	Nom.	dBA	81.0	82.0
Sound pressure level	Cooling	High	dBA	45.0	47.0
	Heating	Low	dBA	45.0	47.0
Piping connections	Liquid	OD	mm	9.52	12.7
	Gas	OD	mm	22.2	
Power supply	Phase / Frequency / Voltage		Hz / V	1~ / 50 / 230	

OUTDOOR UNIT				RZQ200C	RZQ250C
Dimensions	Unit	HeightxWidthxDepth	mm	1,680x930x765	
Weight	Unit		kg	183	184
Fan - Air flow rate	Cooling	Nom.	m³/min	171	
	Heating	Nom.	m³/min	171	
Fan - External static pressure	Max.		Pa	78	
Sound power level	Nom.		dBA	78	
Sound pressure level	Nom.		dBA	57	
Operation range	Cooling	Ambient	Min.~Max. °CDB	-5.0~46.0	
	Heating	Ambient	Min.~Max. °CWB	-15.0~15.0	
Refrigerant	Type/GWP			R-410A/-	
Power supply	Phase / Frequency / Voltage		Hz / V	3N~ / 50 / 380-415	
Current - 50Hz	Maximum fuse amps (MFA)		A	20	

(1) EER/COP according to Eurovent 2012



FAQ100C



RZQG100L8V1/Y1



BRC1E52A/B BRC7AF532F



- > Ideal solution for shops, restaurants or offices without false ceilings
- > Can be installed in both new and existing buildings
- > Flat, stylish front panel blends easily within any interior décor and is more easy to clean
- > 5 different discharge angles can be programmed via the remote control
- > Maintenance operations can be performed from the front of the unit
- > No optional adapter needed for DIII-connection, link your unit into the wider building management system.

Heating & Cooling



INDOOR UNIT				FAQ71C	FAQ100C	FAQ71C	FAQ100C
Cooling capacity	Min./Nom./Max.		kW	-/6.8/-	-/9.5/-	-/6.8/-	-/9.5/-
Heating capacity	Min./Nom./Max.		kW	-/7.5/-	-/10.8/-	-/7.5/-	-/10.8/-
Seasonal efficiency (according to EN14825)	Cooling	Energy label		A++			
		Pdesign	kW	6.80	9.50	6.80	9.50
		SEER		6.51	6.11	6.51	6.11
	Annual energy consumption		kWh	365	544	365	544
	Heating (Average climate)	Energy label		A+			
		Pdesign	kW	6.33	10.20	6.33	10.20
SCOP			4.02	4.01	4.02	4.01	
Annual energy consumption		kWh	2,204	3,561	2,204	3,561	
Nominal efficiency (cooling at 35°/27° nominal load, heating at 7°/20° nominal load)	EER			3.40	3.62	3.40	3.62
	COP			3.70	3.61	3.70	3.61
	Annual energy consumption		kWh	1,000	1,315	1,000	1,315
Energy label		Cooling/Heating	A/A				
Casing	Colour		Fresh White				
Dimensions	Unit	HeightxWidthxDepth	mm	290x1,050x238	340x1,200x240	290x1,050x238	340x1,200x240
Weight	Unit		kg	13	17	13	17
Fan - Air flow rate	Cooling	High/Nom./Low	m³/min	18/16/14	26/23/19	18/16/14	26/23/19
	Heating	High/Nom./Low	m³/min	18/16/14	26/23/19	18/16/14	26/23/19
Sound power level	Cooling	High/Nom./Low	dBA	61/58/56	65/62/58	61/58/56	65/62/58
	Heating	High/Nom./Low	dBA	61/58/56	65/62/58	61/58/56	65/62/58
Sound pressure level	Cooling	High/Nom./Low	dBA	45/42/40	49/45/41	45/42/40	49/45/41
	Heating	High/Nom./Low	dBA	45/42/40	49/45/41	45/42/40	49/45/41
Piping connections	Liquid	OD	mm	9.52			
	Gas	OD	mm	15.9			
Power supply	Phase / Frequency / Voltage		Hz / V	1~ / 50/60 / 220-240/220			

OUTDOOR UNIT				RZQG71L8V1	RZQG100L8V1	RZQG71L8Y1	RZQG100L8Y1
Dimensions	Unit	HeightxWidthxDepth	mm	990x940x320	1,430x940x320	990x940x320	1,430x940x320
Weight	Unit		kg	78	102	80	101
Fan - Air flow rate	Cooling	Nom.	m³/min	59	70	59	70
	Heating	Nom.	m³/min	49	62	49	62
Sound power level	Cooling	Nom.	dBA	64	66	64	66
Sound pressure level	Cooling	Nom.	dBA	48	50	48	50
	Heating	Nom.	dBA	50	52	50	52
Operation range	Night quiet mode		Level 1	dBA	43	45	43
	Cooling	Ambient	Min.-Max.	°CDB	-15~-50		
Refrigerant	Heating		Ambient	Min.-Max.	°CWB	-20~-15.5	
	Type/GWP				R-410A/1,975		
Piping connections	Piping length	OU - IU	Max.	m	50	75	50
		System	Equivalent	m	70	90	70
	Level difference	IU - OU	Max.	m	30.0		
Power supply	IU - IU		Max.	m	0.5		
	Phase / Frequency / Voltage		Hz / V	1~ / 50 / 220-240			3N~ / 50 / 380-415
Current - 50Hz	Maximum fuse amps (MFA)		A	20	32	16	20

(1) EER/COP according to Eurovent 2012



Heating & Cooling

Seasonal Classic



INDOOR UNIT				FAQ71C	FAQ100C	FAQ100C	
Cooling capacity	Min./Nom./Max.		kW	-/6.8/-		-/9.5/-	
Heating capacity	Min./Nom./Max.		kW	-/7.5/-		-/10.8/-	
Seasonal efficiency (according to EN14825)	Cooling	Energy label			A+		
		Pdesign	kW	6.80		9.50	
		SEER		6.05		5.61	
		Annual energy consumption	kWh	393		592	
	Heating (Average climate)	Energy label			A		A+
		Pdesign	kW	6.00		6.81	
		SCOP		3.90		4.01	
		Annual energy consumption	kWh	2,155		2,377	
Nominal efficiency (cooling at 35°/27° nominal load, heating at 7°/20° nominal load)	EER			3.21		3.01	
	COP			3.61		3.41	
	Annual energy consumption		kWh	1,059		1,580	
	Energy label		Cooling/Heating	A/A		B/B	
Casing	Colour			Fresh White			
Dimensions	Unit	HeightxWidthxDepth	mm	290x1,050x238		340x1,200x240	
Weight	Unit		kg	13		17	
Fan - Air flow rate	Cooling	High/Nom./Low	m³/min	18/16/14		26/23/19	
	Heating	High/Nom./Low	m³/min	18/16/14		26/23/19	
Sound power level	Cooling	High/Nom./Low	dBA	61/58/56		65/62/58	
	Heating	High/Nom./Low	dBA	61/58/56		65/62/58	
Sound pressure level	Cooling	High/Nom./Low	dBA	45/42/40		49/45/41	
	Heating	High/Nom./Low	dBA	45/42/40		49/45/41	
Piping connections	Liquid	OD	mm		9.52		
	Gas	OD	mm		15.9		
Power supply	Phase / Frequency / Voltage		Hz / V	1~ / 50/60 / 220-240/220			

OUTDOOR UNIT				RZQSG71L3V1	RZQSG100L8V1	RZQSG100L8Y1
Dimensions	Unit	HeightxWidthxDepth	mm	770x900x320		990x940x320
Weight	Unit		kg	67	81	82
Fan - Air flow rate	Cooling	Nom.	m³/min	52		76
	Heating	Nom.	m³/min	48		83
Sound power level	Cooling	Nom.	dBA	65		69
Sound pressure level	Cooling	Nom./Silent operation	dBA	49/47	53/49	53/-
	Heating	Nom.	dBA	51		57
	Night quiet mode	Level 1	dBA			49
Operation range	Cooling	Ambient	Min.-Max. °CDB	-5.0~46		-5~46
	Heating	Ambient	Min.-Max. °CWB		-15~15.5	
Refrigerant	Type/GWP			R-410A/1,975		
Piping connections	Piping length	OU - IU	Max. m	30		50
		System	Equivalent m	40		70
	Level difference	IU - OU	Max. m	15		30.0
	IU - IU	Max. m		0.5		
Power supply	Phase / Frequency / Voltage		Hz / V	1~ / 50 / 220-240		3N~ / 50 / 380-415
Current - 50Hz	Maximum fuse amps (MFA)		A	20	32	20

(1) EER/COP according to Eurovent 2012



FHQ100-140C



RZQG100-140L8/7V1/L(8)Y1




BRC1E51A/B BRC7GA53



SEASONAL EFFICIENCY
Smart use of energy

- › Ideal solution for commercial spaces with no or narrow false ceilings
- › The unit can easily be mounted in corners and narrow spaces, as it only needs 30mm lateral service space
- › Low energy consumption thanks to DC fan motor and drain pump
- › Stylish unit blends easily with any interior, as the flaps close entirely when not in operation
- › Can be installed in both new and existing buildings
- › Wider air discharge thanks to Coanda effect: up to 100°



- › Air flow distribution for ceiling heights up to 3.8m without capacity loss
- › No optional adapter needed for DIII-connection, link your unit into the wider building management system.

Heating & Cooling



INDOOR UNIT			FHQ71C	FHQ100C	FHQ125C	FHQ140C	FHQ71C	FHQ100C	FHQ125C	FHQ140C	
Cooling capacity	Min./Nom./Max.	kW	-/6.8/-	-/9.5/-	-/12.0/-	-/13.4/-	-/6.8/-	-/9.5/-	-/12.0/-	-/13.4/-	
Heating capacity	Min./Nom./Max.	kW	-/7.5/-	-/10.8/-	-/13.5/-	-/15.5/-	-/7.5/-	-/10.8/-	-/13.5/-	-/15.5/-	
Seasonal efficiency (according to EN14825)	Cooling	Energy label	A++		A+	-	A++		A+	-	
		Pdesign	6.80	9.50	12.00	-	6.80	9.50	12.00	-	
		SEER	6.95	6.11	6.01	-	6.95	6.11	6.01	-	
	Heating (Average climate)	Annual energy consumption	kWh	342	544	698	-	342	544	698	-
		Energy label		A+	A++	A+	-	A+	A++	A+	-
		Pdesign	kW	7.60	11.30	14.13	-	7.60	11.30	14.13	-
Nominal efficiency (cooling at 35°/27° nominal load, heating at 7°/20° nominal load)	EER		3.82	4.13	3.52	3.31	3.82	4.13	3.52	3.31	
		COP	4.13	4.42	3.89	3.63	4.13	4.42	3.89	3.63	
	Annual energy consumption	kWh	890	1,245	1,790	2,025	890	1,245	1,790	2,025	
Casing	Energy label	Cooling/Heating	A/A		-		A/A		-/-		
	Colour		Fresh White								
Dimensions	Unit	HeightxWidthxDepth	mm	235x1,270x690	235x1,590x690		235x1,270x690	235x1,590x690			
Weight	Unit		kg	32	38		32	38			
Fan - Air flow rate	Cooling	High/Nom./Low	m ³ /min	20.5/17/14	28/24/20	31/27/23	34/29/24	20.5/17/14	28/24/20	31/27/23	34/29/24
	Heating	High/Nom./Low	m ³ /min	20.5/17/14	28/24/20	31/27/23	34/29/24	20.5/17/14	28/24/20	31/27/23	34/29/24
Sound power level	Cooling	High/Nom./Low	dB(A)	55/53/51	60/56/52	62/59/55	64/60/56	55/53/51	60/56/52	62/59/55	64/60/56
	Heating	High/Nom./Low	dB(A)	55/53/51	60/56/52	62/59/55	64/60/56	55/53/51	60/56/52	62/59/55	64/60/56
Sound pressure level	Cooling	High/Nom./Low	dB(A)	38/36/34	42/38/34	44/41/37	46/42/38	38/36/34	42/38/34	44/41/37	46/42/38
	Heating	High/Nom./Low	dB(A)	38/36/34	42/38/34	44/41/37	46/42/38	38/36/34	42/38/34	44/41/37	46/42/38
Piping connections	Liquid	OD	mm	9.52							
	Gas	OD	mm	15.9							
Power supply	Phase / Frequency / Voltage	Hz / V	1~ / 50/60 / 220-240/220								

OUTDOOR UNIT				RZQG71L8V1	RZQG100L8V1	RZQG125L8V1	RZQG140L7V1	RZQG71L8Y1	RZQG100L8Y1	RZQG125L8Y1	RZQG140LY1
Dimensions	Unit	HeightxWidthxDepth	mm	990x940x320	1,430x940x320			990x940x320	1,430x940x320		
Weight	Unit		kg	78	102			80	101		
Fan - Air flow rate	Cooling	Nom.	m ³ /min	59	70		84	59	70		84
	Heating	Nom.	m ³ /min	49	62		69	49	62		69
Sound power level	Cooling	Nom.	dB(A)	64	66	67	69	64	66	67	69
	Heating	Nom.	dB(A)	48	50	51	52	48	50	51	52
Sound pressure level	Cooling	Nom.	dB(A)	50	52	53		50	52	53	
	Heating	Nom.	dB(A)	43	45		43	45			
Operation range	Cooling	Ambient	Min.~Max. °CDB	-15~50							
	Heating	Ambient	Min.~Max. °CWB	-20~15.5							
Refrigerant	Type/GWP	R-410A/1,975									
Piping connections	Piping length	OU - IU	Max. m	50	75			50	75		
		System	Equivalent m	70	90			70	90		
	Level difference	IU - OU	Max. m	30.0							
Power supply	Phase / Frequency / Voltage	Hz / V	1~ / 50 / 220-240				3N~ / 50 / 380-415				
			Maximum fuse amps (MFA)	A	20	32		16	20		

(1) EER/COP according to Eurovent 2012



Heating & Cooling

Seasonal Classic

INDOOR UNIT			FHQ71C	FHQ100C	FHQ125C	FHQ140C	FHQ100C	FHQ125C	FHQ140C	
Cooling capacity	Min./Nom./Max.	kW	-/6.8/-	-/9.5/-	-/12.0/-	-/13.4/-	-/9.5/-	-/12.0/-	-/13.4/-	
Heating capacity	Min./Nom./Max.	kW	-/7.5/-	-/10.8/-	-/13.5/-	-/15.5/-	-/10.8/-	-/13.5/-	-/15.5/-	
Seasonal efficiency (according to EN14825)	Cooling	Energy label	A+							
		Pdesign	6.80	9.50	12.00	-	9.50	12.00	-	
		SEER	5.61							
		Annual energy consumption	kWh	424	592	748	-	592	748	-
	Heating (Average climate)	Energy label	A							
		Pdesign	7.60							
		SCOP	3.90	3.91	4.01	-	3.91	4.01	-	
Nominal efficiency (cooling at 35°/27° nominal load, heating at 7°/20° nominal load)	EER	3.46								
	COP	4.00								
	Annual energy consumption	kWh	983	1,480	2,075	2,225	1,480	2,075	2,225	
Casing	Energy label	Cooling/Heating	A/A		C/A		A/A		C/A	
	Colour	Fresh White								
Dimensions	Unit	HeightxWidthxDepth	mm		235x1,270x690					
Weight	Unit	kg		32						
Fan - Air flow rate	Cooling	High/Nom./Low	m ³ /min	20.5/17/14	28/24/20	31/27/23	34/29/24	28/24/20	31/27/23	34/29/24
	Heating	High/Nom./Low	m ³ /min	20.5/17/14	28/24/20	31/27/23	34/29/24	28/24/20	31/27/23	34/29/24
Sound power level	Cooling	High/Nom./Low	dBA	55/53/51	60/56/52	62/59/55	64/60/56	60/56/52	62/59/55	64/60/56
	Heating	High/Nom./Low	dBA	55/53/51	60/56/52	62/59/55	64/60/56	60/56/52	62/59/55	64/60/56
Sound pressure level	Cooling	High/Nom./Low	dBA	38/36/34	42/38/34	44/41/37	46/42/38	42/38/34	44/41/37	46/42/38
	Heating	High/Nom./Low	dBA	38/36/34	42/38/34	44/41/37	46/42/38	42/38/34	44/41/37	46/42/38
Piping connections	Liquid	OD	mm							
	Gas	OD	mm							
Power supply	Phase / Frequency / Voltage	Hz / V	1~ / 50/60 / 220-240/220							

OUTDOOR UNIT				RZQSG71L3V1	RZQSG100L8V1	RZQSG125L8V1	RZQSG140LV1	RZQSG100L8Y1	RZQSG125L8Y1	RZQSG140LY1	
Dimensions	Unit	HeightxWidthxDepth	mm	770x900x320	990x940x320		1,430x940x320	990x940x320		1,430x940x320	
Weight	Unit	kg		67	81		102	82		101	
Fan - Air flow rate	Cooling	Nom.	m ³ /min	52	76	77	83	76	77	83	
	Heating	Nom.	m ³ /min	48	83		62	83	83	62	
Sound power level	Cooling	Nom.	dBA	65	69	70	69		70	69	
Sound pressure level	Cooling	Nom./Silent operation	dBA	49/47	53/49	54/49	53/49	53/-	54/-	53/-	
	Heating	Nom.	dBA	51	57	58	54	57	58	54	
	Night quiet mode	Level 1	dBA	-							
Operation range	Cooling	Ambient	Min.~Max. °CDB	-5.0~46		-5~46					
	Heating	Ambient	Min.~Max. °CWB	-15~15.5							
Refrigerant	Type/GWP	R-410A/1,975									
Piping connections	Piping length	OU - IU	Max. m	30	50						
		System	Equivalent m	40	70						
	Level difference	IU - OU	Max. m	15	30.0						
		IU - IU	Max. m	0.5							
Power supply	Phase / Frequency / Voltage	Hz / V	1~ / 50 / 220-240								
Current - 50Hz	Maximum fuse amps (MFA)	A	20	32				20			

(1) EER/COP according to Eurovent 2012



FHQ35-50C



RXS35K




BRC1E52A/B

BRC7GA53



SEASONAL EFFICIENCY
Smart use of energy

- > Ideal solution for commercial spaces with no or narrow false ceiling
- > The unit can easily be mounted in corners and narrow spaces, as it only needs 30mm lateral service space
- > Low energy consumption thanks to DC fan motor and drain pump
- > Stylish unit blends easily with any interior, as the flaps close entirely when not in operation
- > Can be installed in both new and existing buildings
- > Wider air discharge thanks to Coanda effect: up to 100°



- > Air flow distribution for ceiling heights up to 3.8m without capacity loss
- > No optional adapter needed for DIII-connection, link your unit into the wider building management system.



Heating & Cooling



INDOOR UNIT				FHQ35C	FHQ50C	FHQ60C
Cooling capacity	Min./Nom./Max.	kW		-/3.40/-	-/5.00/-	-/5.70/-
Heating capacity	Min./Nom./Max.	kW		-/4.00/-	-/6.00/-	-/7.20/-
Seasonal efficiency (according to EN14825)	Cooling	Energy label		B		A
		Pdesign	kW	3.40	5.00	7.20
		SEER		4.89	5.48	5.54
	Heating (Average climate)	Energy label			A	
		Pdesign	kW	3.10	4.35	5.07
		SCOP		3.98	3.74	3.50
Nominal efficiency (cooling at 35°/27° nominal load, heating at 7°/20° nominal load)	EER			3.58	3.18	3.26
		COP		3.96	3.35	3.32
	Annual energy consumption		kWh	475	785	875
	Energy label	Cooling/Heating		A/A	B/C	A/C
Casing	Colour		Fresh White			
Dimensions	Unit	HeightxWidthxDepth	mm	235x960x690		235x1,270x690
Weight	Unit		kg	24	25	31
Fan - Air flow rate	Cooling	High/Nom./Low	m ³ /min	14/11.5/10	15/12/10	19.5/15/11.5
	Heating	High/Nom.	m ³ /min	14/11.5	15/12	19.5/15
Sound power level	Cooling	High/Nom./Low	dBA	53/51/48	54/52/49	54/52/50
	Heating	High/Nom./Low	dBA	53/51/48	54/52/49	54/52/50
Sound pressure level	Cooling	High/Nom./Low	dBA	36/34/31	37/35/32	37/35/33
	Heating	High/Nom./Low	dBA	36/34/31	37/35/32	37/35/33
Piping connections	Liquid	OD	mm	6.35		
	Gas	OD	mm	9.52	12.70	
Power supply	Phase / Frequency / Voltage		Hz / V	1~ / 50/60 / 220-240/220		

OUTDOOR UNIT				RXS35K	RXS50K	RXS60F
Dimensions	Unit	HeightxWidthxDepth	mm	550x765x285	735x825x300	
Weight	Unit		kg	34	47	
Fan - Air flow rate	Cooling	High/Low	m ³ /min	36.0/30.1	50.9/48.9	50.9/42.4
	Heating	High/Low	m ³ /min	28.3/25.6	45.0/43.1	46.3/42.4
Sound power level	Cooling	Nom./High	dBA	-/63		
Sound pressure level	Cooling	High/Low	dBA	48/44		49/46
	Heating	High/Low	dBA	48/45		49/46
Operation range	Cooling	Ambient	Min.-Max. °CDB	-10~46		
	Heating	Ambient	Min.-Max. °CWB	-15~18		
Refrigerant	Type/GWP			R-410A/1,975		
Piping connections	Piping length	OU - IU	Max. m	20	30	
	Level difference	IU - OU	Max. m	15	20	
Power supply	Phase / Frequency / Voltage		Hz / V	1~ / 50 / 220-240		
Current - 50Hz	Maximum fuse amps (MFA)		A	10	20	

(1) EER/COP according to Eurovent 2012



FUQ71-125C




RZQG100-125L8V1/Y1



BRC1E52A/B BRC7CB528



- > Ideal solution for commercial spaces with no or narrow false ceilings
- > Low energy consumption thanks to specially developed small tube heat exchanger, DC fan motor and drain pump
- > Stylish unit blends easily with any interior, as the flaps close entirely when not in operation
- > Improved comfort thanks to automatic air flow adjustment to required load
- > Individual flap control: one flap can be easily closed via the wired remote controller (BRC1E52) in case you would refurbish or rearrange your interior
- > Can be installed in both new and existing buildings
- > Same outlook for all models (unified dimensions)
- > Auto swing function ensures efficient air and temperature distribution
- > Air can be discharged in 5 different angles between 0 and 60°



- > Possibility to shut 1 or 2 flaps for easy installation in corners



- > Air flow distribution for ceiling heights up to 3.5m without capacity loss
- > No optional adapter needed for DIII-connection, link your unit into the wider building management system.



Heating & Cooling



INDOOR UNIT			FUQ71C	FUQ100C	FUQ125C	FUQ71C	FUQ100C	FUQ125C	
Cooling capacity	Min./Nom./Max.	kW	-/6.8/-	-/9.5/-	-/12.0/-	-/6.8/-	-/9.5/-	-/12.0/-	
Heating capacity	Min./Nom./Max.	kW	-/7.5/-	-/10.8/-	-/13.5/-	-/7.5/-	-/10.8/-	-/13.5/-	
Seasonal efficiency (according to EN14825)	Cooling	Energy label	A++		A+		A++		
		Pdesign	6.80	9.50	12.00	6.80	9.50	12.00	
		SEER	6.50	6.11	5.61	6.50	6.11	5.61	
	Heating (Average climate)	Annual energy consumption	kWh	366	544	748	366	544	748
		Energy label	A+						
		Pdesign	7.60	11.30	14.13	7.60	11.30	14.13	
Nominal efficiency (cooling at 35°/27° nominal load, heating at 7°/20° nominal load)	EER	COP	4.07	4.08	4.04	4.07	4.08	4.04	
		Annual energy consumption	kWh	840	1,230	1,770	840	1,230	1,770
	Energy label	Cooling/Heating	A/A						
Casing	Colour	Fresh White							
Dimensions	Unit	HeightxWidthxDepth	198x950x950						
Weight	Unit	kg	25	26	25	25	26	26	
Fan - Air flow rate	Cooling	High/Nom./Low	m³/min	23/19.5/16	31/25.5/20	32.5/26.5/20.5	23/19.5/16	31/25.5/20	32.5/26.5/20.5
	Heating	High/Nom./Low	m³/min	23/19.5/16	31/25.5/20	32.5/26.5/20.5	23/19.5/16	31/25.5/20	32.5/26.5/20.5
Sound power level	Cooling	High/Nom./Low	dB(A)	59/56/51	64/60/55	65/61/56	59/56/51	64/60/55	65/61/56
	Heating	High/Nom./Low	dB(A)	59/56/51	64/60/55	65/61/56	59/56/51	64/60/55	65/61/56
Sound pressure level	Cooling	High/Nom./Low	dB(A)	41/38/35	46/42/39	47/43/40	41/38/35	46/42/39	47/43/40
	Heating	High/Nom./Low	dB(A)	41/38/35	46/42/39	47/43/40	41/38/35	46/42/39	47/43/40
Piping connections	Liquid	OD	9.52						
	Gas	OD	15.9						
Power supply	Phase / Frequency / Voltage	Hz / V	1~ / 50/60 / 220-240/220						

OUTDOOR UNIT			RZQG71L8V1	RZQG100L8V1	RZQG125L8V1	RZQG71L8Y1	RZQG100L8Y1	RZQG125L8Y1	
Dimensions	Unit	HeightxWidthxDepth	990x940x320	1,430x940x320		990x940x320	1,430x940x320		
Weight	Unit	kg	78	102	80	101	70	53	
Fan - Air flow rate	Cooling	Nom.	m³/min	59	70	59	62	67	
	Heating	Nom.	m³/min	49	62	49	62	67	
Sound power level	Cooling	Nom.	dB(A)	64	66	67	64	66	
	Heating	Nom.	dB(A)	48	50	51	48	50	
Sound pressure level	Cooling	Nom.	dB(A)	50	52	53	50	52	
	Heating	Nom.	dB(A)	50	52	53	50	52	
Operation range	Night quiet mode	Level 1	dB(A)	43	45	43	45	45	
	Cooling	Ambient	Min.~Max.	-15~50					
Refrigerant	Heating	Ambient	Min.~Max.	-20~15.5					
	Type/GWP	R-410A/1,975							
Piping connections	Piping length	OU - IU	Max.	m	50	75	50	75	
		System	Equivalent	m	70	90	70	90	
	Level difference	IU - OU	Max.	m	30.0				
		IU - IU	Max.	m	0.5				
Power supply	Phase / Frequency / Voltage	Hz / V	1~ / 50 / 220-240						
Current - 50Hz	Maximum fuse amps (MFA)	A	20	32	16	32	20	20	

(1) EER/COP according to Eurovent 2012



FVQ100-140C



RZQG100-140L8/7V1/L(8)Y1



BRC1E52A/B



- › Ideal solution for shops, restaurants or offices without false ceilings
- › Can be installed in both new and existing buildings
- › Very efficient for use in rooms with high ceilings
- › Decrease of temperature variation by automatic fan speed selection or freely selectable 3-step fan speed.
- › Improved efficiency by adoption of the DC fan motor.
- › No optional adapter needed for DIII-connection, link your unit into the wider building management system.

Heating & Cooling



INDOOR UNIT			FVQ71C	FVQ100C	FVQ125C	FVQ140C	FVQ71C	FVQ100C	FVQ125C	FVQ140C		
Cooling capacity	Min./Nom./Max.	kW	-/6,8/-	-/9,5/-	-/12,0/-	-/13,4/-	-/6,8/-	-/9,5/-	-/12,0/-	-/13,4/-		
Heating capacity	Min./Nom./Max.	kW	-/7,5/-	-/10,8/-	-/13,5/-	-/15,5/-	-/7,5/-	-/10,8/-	-/13,5/-	-/15,5/-		
Seasonal efficiency (according to EN14825)	Cooling	Energy label	A++		A+		-		A++			
		Pdesign	6,80	9,50	12,00	-	6,80	9,50	12,00	-		
		SEER	6,31	5,61		-	6,31	5,61		-		
		Annual energy consumption	377	592	748	-	377	592	748	-		
	Heating (Average climate)	Energy label	A+		A		-		A+		A	
		Pdesign	6,33	11,30		-	6,33	11,30		-	-	
		SCOP	4,05	4,20	3,87	-	4,05	4,20	3,87	-	-	
		Annual energy consumption	2.188	3.766	4.087	-	2.188	3.766	4.087	-	-	
Nominal efficiency (cooling at 35°/27° nominal load, heating at 7°/20° nominal load)	EER	3,37	3,81	3,21		3,37	3,81	3,21		-		
	COP	3,64	4,14	3,70	3,61	3,64	4,14	3,70	3,61	-		
	Annual energy consumption	1.010	1.245	1.870	2.085	1.010	1.245	1.870	2.085	-		
Casing	Energy label	Cooling/Heating		A/A		-		A/A		-/-		
	Colour	Fresh White										
Dimensions	Unit	HeightxWidthxDepth	mm	1.850x600x270		1.850x600x350		1.850x600x270		1.850x600x350		
Weight	Unit		kg	39		47		39		47		
Fan - Air flow rate	Cooling	High/Nom./Low	m ³ /min	18/16/14	28/25/22	28/26/24	30/28/26	18/16/14	28/25/22	28/26/24	30/28/26	
	Heating	High/Nom./Low	m ³ /min	18/16/14	28/25/22	28/26/24	30/28/26	18/16/14	28/25/22	28/26/24	30/28/26	
Sound power level	Cooling	High/Nom./Low	dBA	55/53/50	62/59/56	63/60/58	65/63/60	55/53/50	62/59/56	63/60/58	65/63/60	
	Heating	High/Nom./Low	dBA	55/53/50	62/59/56	63/60/58	65/63/60	55/53/50	62/59/56	63/60/58	65/63/60	
Sound pressure level	Cooling	High/Nom./Low	dBA	43/41/38	50/47/44	51/48/46	53/51/48	43/41/38	50/47/44	51/48/46	53/51/48	
	Heating	High/Nom./Low	dBA	43/41/38	50/47/44	51/48/46	53/51/48	43/41/38	50/47/44	51/48/46	53/51/48	
Piping connections	Liquid	OD	mm	9,52								
	Gas	OD	mm	15,9								
Power supply	Phase / Frequency / Voltage	Hz / V		1~ / 50/60 / 220-240/220								

OUTDOOR UNIT				RZQG71L8V1	RZQG100L8V1	RZQG125L8V1	RZQG140L7V1	RZQG71L8Y1	RZQG100L8Y1	RZQG125L8Y1	RZQG140LY1
Dimensions	Unit	HeightxWidthxDepth	mm	990x940x320		1.430x940x320		990x940x320		1.430x940x320	
Weight	Unit		kg	78		102		80		101	
Fan - Air flow rate	Cooling	Nom.	m ³ /min	59	70		84	59	70		84
	Heating	Nom.	m ³ /min	49	62		69	49	62		69
Sound power level	Cooling	Nom.	dBA	64	66	67	69	64	66	67	69
Sound pressure level	Cooling	Nom.	dBA	48	50	51	52	48	50	51	52
	Heating	Nom.	dBA	50	52	53		50	52	53	
	Night quiet mode	Level 1	dBA	43	45			43	45		
Operation range	Cooling	Ambient	Min.~Max. °CDB	-15~50							
	Heating	Ambient	Min.~Max. °CWB	-20~15,5							
Refrigerant	Type/GWP			R-410A/1,975							
Piping connections	Piping length	OU - IU	Max. m	50	75		50	50	75		75
		System	Equivalent m	70	90		70	70	90		90
	Level difference	IU - OU	Max. m	30,0							
		IU - IU	Max. m	0,5							
Power supply	Phase / Frequency / Voltage	Hz / V		1~ / 50 / 220-240				3N~ / 50 / 380-415			
Current - 50Hz	Maximum fuse amps (MFA)	A	20	32		16	20		20		20

(1) EER/COP according to Eurovent 2012



Heating & Cooling

Seasonal Classic

INDOOR UNIT			FVQ71C	FVQ100C	FVQ125C	FVQ140C	FVQ100C	FVQ125C	FVQ140C		
Cooling capacity	Min./Nom./Max.	kW	-/6,8/-	-/9,5/-	-/12,0/-	-/13,4/-	-/9,5/-	-/12,0/-	-/13,4/-		
Heating capacity	Min./Nom./Max.	kW	-/7,5/-	-/10,8/-	-/13,5/-	-/15,5/-	-/10,8/-	-/13,5/-	-/15,5/-		
Seasonal efficiency (according to EN14825)	Cooling	Energy label	A								
		Pdesign	kW	6,80	9,50	12,00	-	9,50	12,00	-	
		SEER		5,50							
		Annual energy consumption	kWh	433	604	763	-	604	763	-	
	Heating (Average climate)	Energy label	A								
		Pdesign	kW	6,33	7,60		A		A+		A
		SCOP		3,86	4,01	3,85	-	4,01	3,85	-	
		Annual energy consumption	kWh	2.296	2.653	2.763	-	2.653	2.763	-	
Nominal efficiency (cooling at 35°/27° nominal load, heating at 7°/20° nominal load)	EER		3,21		2,81	3,01	3,21		2,81	3,01	
	COP		3,61		3,41		3,61		3,41		
	Annual energy consumption	kWh	1.059	1.480	2.135	2.225	1.480	2.135	2.225		
Casing	Energy label	Cooling/Heating	A/A		C/B		A/A		C/B		
	Colour		Fresh White								
Dimensions	Unit	HeightxWidthxDepth	mm	1.850x600x270		1.850x600x350					
Weight	Unit		kg	39		47					
Fan - Air flow rate	Cooling	High/Nom./Low	m ³ /min	18/16/14	28/25/22	28/26/24	30/28/26	28/25/22	28/26/24	30/28/26	
	Heating	High/Nom./Low	m ³ /min	18/16/14	28/25/22	28/26/24	30/28/26	28/25/22	28/26/24	30/28/26	
Sound power level	Cooling	High/Nom./Low	dBA	55/53/50	62/59/56	63/60/58	65/63/60	62/59/56	63/60/58	65/63/60	
	Heating	High/Nom./Low	dBA	55/53/50	62/59/56	63/60/58	65/63/60	62/59/56	63/60/58	65/63/60	
Sound pressure level	Cooling	High/Nom./Low	dBA	43/41/38	50/47/44	51/48/46	53/51/48	50/47/44	51/48/46	53/51/48	
	Heating	High/Nom./Low	dBA	43/41/38	50/47/44	51/48/46	53/51/48	50/47/44	51/48/46	53/51/48	
Piping connections	Liquid	OD	mm	9,52							
	Gas	OD	mm	15,9							
Power supply	Phase / Frequency / Voltage	Hz / V	1~ / 50/60 / 220-240/220								

OUTDOOR UNIT			RZQSG71L3V1	RZQSG100L8V1	RZQSG100L8V1	RZQSG140LV1	RZQSG100L8Y1	RZQSG125L8Y1	RZQSG140LY1	
Dimensions	Unit	HeightxWidthxDepth	mm	770x900x320		990x940x320		1.430x940x320		
Weight	Unit		kg	67		81		102		
Fan - Air flow rate	Cooling	Nom.	m ³ /min	52		76		83		
	Heating	Nom.	m ³ /min	48		83		62		
Sound power level	Cooling	Nom.	dBA	65		69		70		
Sound pressure level	Cooling	Nom./Silent operation	dBA	49/47		53/49		53/-		
	Heating	Nom.	dBA	51		57		54		
	Night quiet mode	Level 1	dBA					49		
Operation range	Cooling	Ambient Min.-Max.	°CDB	-5,0~46		-5~46				
	Heating	Ambient Min.-Max.	°CWB	-15~15,5						
Refrigerant	Type/GWP		R-410A/1,975							
Piping connections	Piping length	OU - IU	Max.	m		30		50		
		System	Equivalent	m		40		70		
	Level difference	IU - OU	Max.	m		15		30,0		
		IU - IU	Max.	m		0,5				
Power supply	Phase / Frequency / Voltage	Hz / V	1~ / 50 / 220-240						3N~ / 50 / 380-415	
Current - 50Hz	Maximum fuse amps (MFA)	A	20		32		20			

(1) EER/COP according to Eurovent 2012



ACQ-B



AZQS-BV1/BY1



ARCWLA



- › Ideal solution for shops, restaurants or offices requiring maximum floor space for furniture, decorations and fittings
- › Blends unobtrusively with any interior décor: only the suction and discharge grilles are visible
- › Air can be discharged in any of 4 directions
- › Air filter removes airborne dust particles to ensure a steady supply of clean air
- › Easy installation and maintenance



Heating & Cooling

INDOOR UNIT				ACQ71B	ACQ100B	ACQ125B	ACQ100B	ACQ125B	
Cooling capacity	Min./Nom./Max.		kW	-/6.8/-	-/9.5/-	-/12.1/-	-/9.5/-	-/12.1/-	
Heating capacity	Min./Nom./Max.		kW	-/7.5/-	-/10.8/-	-/13.5/-	-/10.8/-	-/13.5/-	
Seasonal efficiency (according to EN14825)	Cooling	Energy label		B					
		Pdesign		kW	6.80	9.50	-	9.50	-
		SEER			4.65				
		Annual energy consumption		kWh	512	715	-	715	-
	Heating (Average climate)	Energy label		A					
		Pdesign		kW	6.33	7.60	-	7.60	-
		SCOP			3.41				
		Annual energy consumption		kWh	2,599	3,066	-	3,066	-
Nominal efficiency (cooling at 35°/27° nominal load, heating at 7°/20° nominal load)	EER			3.31					
	COP			3.61					
	Annual energy consumption		kWh	1,025	1,480	2,010	1,480	2,010	
	Energy label		Cooling/Heating	A/A					
Casing	Colour		-						
Dimensions	Unit	HeightxWidthxDepth	mm	265x820x820		300x820x820			
Weight	Unit		kg	31		39			
Decoration panel	Colour		White						
	Dimensions	HeightxWidthxDepth	mm	82x990x990					
	Weight		kg	4					
Fan - Air flow rate	Cooling	High/Nom./Low/Silent operation	m ³ /min	24.4/20.5/17.6/15.0	29.2/24.4/21.0/17.6	34.0/29.2/26.3/22.1	29.2/24.4/21.0/17.6	34.0/29.2/26.3/22.1	
	Heating	High/Nom./Low/Silent operation	m ³ /min	24.4/20.5/17.6/15.0	29.2/24.4/21.0/17.6	34.0/29.2/26.3/22.1	29.2/24.4/21.0/17.6	34.0/29.2/26.3/22.1	
Fan - External static pressure	High/Nom./Low		Pa	0/0/0					
Sound power level	Cooling	High/Nom./Low	dBA	54/50/48	56/54/53	60/56/54	56/54/53	60/56/54	
	Heating	High/Nom./Low	dBA	54/50/48	56/54/53	60/56/54	56/54/53	60/56/54	
Sound pressure level	Cooling	High/Nom./Low/Silent operation	dBA	41/38/35/32	44/41/38/36	47/44/43/41	44/41/38/36	47/44/43/41	
	Heating	High/Nom./Low/Silent operation	dBA	41/38/35/32	44/41/38/36	47/44/43/41	44/41/38/36	47/44/43/41	
Piping connections	Liquid	OD	mm	9.52					
	Gas	OD	mm	15.88					
Power supply	Phase / Frequency / Voltage		Hz / V	1~ / 50 / 220-240					

OUTDOOR UNIT				AZQS71BV1	AZQS100BV1	AZQS125BV1	AZQS100BY1	AZQS125BYV1
Dimensions	Unit	HeightxWidthxDepth	mm	770x900x320		990x940x320		
Weight	Unit		kg	67		81		82
Fan - Air flow rate	Cooling	Nom.	m ³ /min	52.0	76	77	76	77
	Heating	Nom.	m ³ /min	48.0		83		
Sound power level	Cooling	Nom.	dBA	64	70	71	70	71
Sound pressure level	Cooling	Nom./Silent operation	dBA	48/43	53/-	54/-	53/-	54/-
	Heating	Nom.	dBA	50	57	58	57	58
	Night quiet mode	Level 1	dBA	-				
Operation range	Cooling	Ambient	Min.-Max.	°CDB -5.0~46.0				
	Heating	Ambient	Min.-Max.	°CWB -15.0~15.5				
Refrigerant	Type/GWP			R-410A/1,975				
Piping connections	Piping length	OU - IU	Max.	m		50		
		System	Equivalent	m		70		
	Level difference	IU - OU	Max.	m		30.0		
		IU - IU	Max.	m		0.5		
Power supply	Phase / Frequency / Voltage		Hz / V	1~ / 50 / 220-240				3N~ / 50 / 380-415
Current - 50Hz	Maximum fuse amps (MFA)		A	20				-

(1) EER/COP according to Eurovent 2012



ABQ71B



AZQS71BV1



ARCWA



- > 3-D air flow combines vertical and horizontal auto swing to circulate a stream of warm or cool air right to the corners of even large spaces
- > Ideal solution for shops, restaurants or offices requiring maximum floor space for furniture, decorations and fittings
- > Blends unobtrusively with any interior décor: only the suction and discharge grilles are visible
- > Compact dimensions, can easily be mounted in a narrow ceiling void
- > Air filter removes airborne dust particles to ensure a steady supply of clean air
- > Easy installation and maintenance



Heating & Cooling

INDOOR UNIT				ABQ71B	ABQ125A	ABQ140A	ABQ125A	ABQ140A
Cooling capacity	Min./Nom./Max.		kW	-/6.8/-	-/12.1/-	-/13.0/-	-/12.1/-	-/13.0/-
Heating capacity	Min./Nom./Max.		kW	-/7.5/-	-/13.5/-	-/15.5/-	-/13.5/-	-/15.5/-
Seasonal efficiency (according to EN14825)	Cooling	Energy label		B				
		Pdesign	kW	6.80	-	-	-	-
		SEER		4.65	-	-	-	-
		Annual energy consumption	kWh	512	-	-	-	-
	Heating (Average climate)	Energy label		A				
		Pdesign	kW	6.33	-	-	-	-
		SCOP		3.41	-	-	-	-
		Annual energy consumption	kWh	2,599	-	-	-	-
Nominal efficiency (cooling at 35°/27° nominal load, heating at 7°/20° nominal load)	EER		3.01	2.91	3.01	2.91	3.01	
	COP		3.61	-	-	3.41	-	
	Annual energy consumption	kWh	1,130	2,079	2,159	2,079	2,159	
Casing	Energy label	Cooling/Heating	B/A	C/B	B/B	C/B	B/B	
	Colour		-	-	-	-	-	
Dimensions	Unit	HeightxWidthxDepth	mm	285x1,007x600	378x1,388x541	378x1,588x541	378x1,388x541	378x1,588x541
Weight	Unit		kg	35	50.0	56.0	50.0	56.0
Fan - Air flow rate	Cooling	High/Nom./Low	m³/min	18.3/17.0/15.6	-	-	-	-
	Heating	High/Nom./Low operation	m³/min	18.3/17.0/15.6	1,430/-	1,720/-	1,430/-	1,720/-
Fan - External static pressure	Super high/High/Nom./Low	Pa	-/88/76/63	147/126/109/92	147/120/90/69	147/126/109/92	147/120/90/69	
Sound power level	Cooling	Super high/High/Nom./Low	dBA	-/64/59/54	78/76/73/70	79/78/75/71	78/76/73/70	79/78/75/71
	Heating	High/Nom./Low	dBA	64/59/54	76/73/70	78/75/71	76/73/70	78/75/71
Sound pressure level	Cooling	Super high/High/Nom./Low	dBA	-	53/52/50/47	55/53/50/47	53/52/50/47	55/53/50/47
	Heating	High/Nom./Low	dBA	-	52/50/47	53/50/47	52/50/47	53/50/47
Piping connections	Liquid	OD	mm	-	-	9.52	-	-
	Gas	OD	mm	-	-	15.88	-	-
Power supply	Phase / Frequency / Voltage	Hz / V		1~ / 50 / 220-240	-	-	1~ / 50 / 230	-

OUTDOOR UNIT				AZQS71BV1	AZQS125BV1	AZQS140BV1	AZQS125BV1	AZQS140BY1
Dimensions	Unit	HeightxWidthxDepth	mm	770x900x320	990x940x320	1,430x940x320	990x940x320	1,430x940x320
Weight	Unit		kg	67	81	102	82	101
Fan - Air flow rate	Cooling	Nom.	m³/min	52.0	77	83	77	83
	Heating	Nom.	m³/min	48.0	83	62	83	62
Sound power level	Cooling	Nom.	dBA	64	71	70	71	70
Sound pressure level	Cooling	Nom./Silent operation	dBA	48/43	54	53	54	53
	Heating	Nom.	dBA	50	58	54	58	54
	Night quiet mode	Level 1	dBA	-	-	-	49	-
Operation range	Cooling	Ambient	Min.-Max.	-5.0~46.0				
	Heating	Ambient	Min.-Max.	-15.0~15.5				
Refrigerant	Type/GWP			R-410A/1,975				
Piping connections	Piping length	OU - IU	Max.	m	30	-	50	-
		System	Equivalent	m	40	-	70	-
	Level difference	IU - OU	Max.	m	15.0	-	30.0	-
		IU - IU	Max.	m	-	-	0.5	-
Power supply	Phase / Frequency / Voltage	Hz / V		1~ / 50 / 220-240			3N~ / 50 / 380-415	
Current - 50Hz	Maximum fuse amps (MFA)	A		20	-	-	-	-

(1) EER/COP according to Eurovent 2012



AHQ125CV1



AZQS140BV1/BY1



ARCWLA



- > Ideal solution for shops, restaurants or offices with no or narrow false ceilings
- > Can be installed in both new and existing buildings
- > Air filter removes airborne dust particles to ensure a steady supply of clean air
- > Easy installation and maintenance



Heating & Cooling

INDOOR UNIT			AHQ71C	AHQ100C	AHQ125C	AHQ140C	AHQ100C	AHQ125C	AHQ140C	
Cooling capacity	Min./Nom./Max.	kW	-/6.8/-	-/9.5/-	-/12.1/-	-/13.0/-	-/9.5/-	-/12.1/-	-/13.0/-	
Heating capacity	Min./Nom./Max.	kW	-/7.5/-	-/10.8/-	-/13.5/-	-/15.5/-	-/10.8/-	-/13.5/-	-/15.5/-	
Seasonal efficiency (according to EN14825)	Cooling	Energy label	B			-	B	-	-	
		Pdesign	kW	6.80	9.50	-	9.50	-	-	
		SEER		4.65	4.60	-	4.60	-	-	
	Heating (Average climate)	Annual energy consumption	kWh	511	723	-	723	-	-	
		Energy label		A		-	A	-	-	
		Pdesign	kW	6.33	7.60	-	7.60	-	-	
Nominal efficiency (cooling at 35°/27° nominal load, heating at 7°/20° nominal load)	SCOP		3.80		-	3.80	-	-		
	Annual energy consumption	kWh	2,332	2,800	-	2,800	-	-		
	EER		3.03	2.62	2.63	3.01	2.62	2.63	3.01	
	COP		3.05	3.41	3.61	3.41	3.61	3.61	3.41	
Annual energy consumption	kWh		1,120	1,810	2,300	2,159	1,810	2,300	2,159	
	Energy label	Cooling/Heating	B/D	D/B	D/A	B/B	D/B	D/A	B/B	
Casing	Colour		White							
Dimensions	Unit	HeightxWidthxDepth	mm	260x1,320x634	260x1,538x634	260x1,786x634	285x1,902x680	260x1,538x634	260x1,786x634	285x1,902x680
Weight	Unit		kg	38	45	54	70	45	54	70
Fan - Air flow rate	Cooling	High/Nom./Low	m ³ /min	23.8/21.3/18.9	31.1/27.8/24.8	34.4/30.6/27.2	43.9/39.1/28.3	31.1/27.8/24.8	34.4/30.6/27.2	43.9/39.1/28.3
		Heating	m ³ /min	23.8/21.3/18.9	31.1/27.8/24.8	34.4/30.6/27.2	43.9/39.1/28.3	31.1/27.8/24.8	34.4/30.6/27.2	43.9/39.1/28.3
Fan - External static pressure	High/Nom./Low		Pa	0/0/0						
Sound power level	Cooling	High	dBA	62	64	69	70	64	69	70
	Heating	High	dBA	62	64	69	70	64	69	70
Sound pressure level	Cooling	High/Nom./Low	dBA	49/48/46	52/47/46	52/50/49	56/53/46	52/47/46	52/50/49	56/53/46
	Heating	High/Nom./Low	dBA	49/48/46	52/47/46	52/50/49	56/53/46	52/47/46	52/50/49	56/53/46
Piping connections	Liquid	OD	mm	9.52						
	Gas	OD	mm	15.88						
Power supply	Phase / Frequency / Voltage	Hz / V		1~ / 50 / 220-240						

OUTDOOR UNIT			AZQS71BV1	AZQS100BV1	AZQS125BV1	AZQS140BV1	AZQS100BY1	AZQS125BY1	AZQS140BY1	
Dimensions	Unit	HeightxWidthxDepth	mm	770x900x320	990x940x320	1,430x940x320	990x940x320	990x940x320	1,430x940x320	
Weight	Unit		kg	67	81	102	82	82	101	
Fan - Air flow rate	Cooling	Nom.	m ³ /min	52.0	76	77	83	76	77	83
	Heating	Nom.	m ³ /min	48.0	83	62	83	83	62	
Sound power level	Cooling	Nom.	dBA	64	70	71	70	71	70	
Sound pressure level	Cooling	Nom./Silent operation	dBA	48/43	53/-	54/-	53/-	54/-	53/-	
	Heating	Nom.	dBA	50	57	58	54	57	58	
	Night quiet mode	Level 1	dBA	-	-	-	49	-	-	
Operation range	Cooling	Ambient	Min.~Max.	°CDB -5.0~46.0						
	Heating	Ambient	Min.~Max.	°CWB -15.0~15.5						
Refrigerant	Type/GWP			R-410A/1,975						
Piping connections	Piping length	OU - IU	Max.	m	30	50				
		System	Equivalent	m	40	70				
	Level difference	IU - OU	Max.	m	15.0	30.0				
		IU - IU	Max.	m	-	0.5				
Power supply	Phase / Frequency / Voltage	Hz / V		1~ / 50 / 220-240				3N~ / 50 / 380-415		
Current - 50Hz	Maximum fuse amps (MFA)	A		20						

(1) EER/COP according to Eurovent 2012



- > Re-use of existing R-22 or R-407C piping
- > Down to -15°C in heating mode
- > Standard night quiet mode
- > Maximum piping length up to 100m
- > Maximum installation height difference up to 30m



Capacity class	FCQG-F					FFQ-C		FDXS-F		FBQ-C8					FHQ-C					FUQ-C			FAQ-C		FDQ-C
	50	60	71	100	125	50	60	50	60	50	60	71	100	125	50	60	71	100	125	71	100	125	71	100	125
RZQ200C	4	3	3	2		4	3	4	3	4	3	3	2		4	3	3	2		3	2		3	2	
RZQ250C		4			2		4		4		4			4		2			2			2			2



CONNECTABLE OUTDOOR UNITS					RZQ200C					RZQ250C				
OUTDOOR UNIT					RZQ200C					RZQ250C				
Dimensions	Unit	HeightxWidthxDepth	mm		1,680x930x765					1,680x930x765				
Weight	Unit			kg	183					184				
Fan - Air flow rate	Cooling	Nom.	m ³ /min		171					171				
	Heating	Nom.	m ³ /min		171					171				
Fan - External static pressure	Max.			Pa	78					78				
	Sound power level	Nom.			dBA	78					78			
Sound pressure level	Nom.			dBA	57					57				
Operation range	Cooling	Ambient	Min.~Max.	°CDB	-5.0~46.0					-5.0~46.0				
	Heating	Ambient	Min.~Max.	°CWB	-15.0~15.0					-15.0~15.0				
Refrigerant	Type/GWP				R-410A/1,975					R-410A/1,975				
Piping connections	Piping length	OU - IU	Max.	m	100					100				
	Level difference	IU - OU	Max.	m	-					-				
Power supply	Phase / Frequency / Voltage			Hz / V	3N~ / 50 / 380-415					3N~ / 50 / 380-415				
Current - 50Hz	Maximum fuse amps (MFA)			A	20					20				



- > Seasonal efficiency, optimized for all seasons
- > Seasonal smart series already comply with the EU's 2014 Eco-Design requirements
- > Suits computer room applications (EDP)
- > Re-use of existing R-22 or R-407C technology
- > Down to -20°C in heating mode
- > Standard night quiet mode
- > Maximum piping length up to 75m
- > Minimum piping length: no limitation
- > Compatibility with D-BACS



	FCQH-G-F	FCQG-F				FFQ-C			FDXS-F			FBQ-C8				FHQ-C				FAQ-C	FUQ-C
page	108	105				111			85			112				120				118	123
capacity class	71	35	50	60	71	35	50	60	35	50	60	35	50	60	71	35	50	60	71	71	71
RZQG71L8V1	RZQG71L8Y1	2				2			2			2				2					
RZQG100L8V1	RZQG100L8Y1	3	2			3	2		3	2		3	2			3	2				
RZQG125L8V1	RZQG125L8Y1	4	3	2		4	3	2	4	3	2	4	3	2		4	3	2			
RZQG140L7V1	RZQG140LY1	2	4	3		2	4	3		4	3		4	3		2	4	3		2	2

Seasonal Smart



OUTDOOR UNIT				RZQG71L8V1	RZQG100L8V1	RZQG125L8V1	RZQG140L7V1	RZQG71L8Y1	RZQG100L8Y1	RZQG125L8Y1	RZQG140LY1					
Dimensions	Unit	HeightxWidthxDepth	mm	990x940x320	1,430x940x320			990x940x320	1,430x940x320							
Weight	Unit		kg	78	102			80	101							
Fan - Air flow rate	Cooling	Nom.	m ³ /min	59	70			59	70			84				
	Heating	Nom.	m ³ /min	49	62			49	62			53				
Sound power level	Cooling	Nom.	dB(A)	64	66	67	69	64	66	67	69					
	Heating	Nom.	dB(A)	48	50	51	52	48	50	51	52					
Sound pressure level	Heating	Nom.	dB(A)	50	52	53		50	52	53						
	Night quiet mode	Level 1	dB(A)	43	45			43	45							
Operation range	Cooling	Ambient	Min.-Max. °CDB	-15~50												
	Heating	Ambient	Min.-Max. °CWB	-20~15.5												
Refrigerant	Type/GWP			R-410A/1,975												
Piping connections	Piping length	OU - IU	Max.	m	50	75			50	75						
		System	Equivalent	m	70	90			70	90						
	Level difference	IU - OU	Max.	m	30.0											
		IU - IU	Max.	m	0.5											
Power supply	Phase / Frequency / Voltage			Hz / V				1~ / 50 / 220-240				3N~ / 50 / 380-415				
Current - 50Hz	Maximum fuse amps (MFA)			A				20	32			16	20			



- > Seasonal efficiency, optimized for all seasons
- > Re-use of existing R-22 or R-407C technology
- > Down to -15°C in heating mode
- > Maximum piping length up to 50m
- > Minimum piping length: no limitation
- > Compatibility with D-BACS



	FCQHG-F	FCQG-F				FFQ-C			FDXS-F			FBQ-C8				FHQ-C				FAQ-C	
Page	108	105				111			85			112				120				118	
capacity class	71	35	50	60	71	35	50	60	35	50	60	35	50	60	71	35	50	60	71	71	
RZQSG71L3V1		2				2			2			2				2					
RZQSG100L8V1	RZQSG100L8Y1	3	2			3	2		3	2		3	2			3	2				
RZQSG125L8V1	RZQSG125L8Y1	4	3	2		4	3	2	4	3	2	4	3	2		4	3	2			
RZQSG140LV1	RZQSG140LY1	2	4	3		2	4	3		4	3		4	3		2	4	3		2	2

Seasonal Classic



OUTDOOR UNIT				RZQG71L8V1	RZQG100L8V1	RZQG125L8V1	RZQG140L7V1	RZQG71L8Y1	RZQG100L8Y1	RZQG125L8Y1	RZQG140LY1					
Dimensions	Unit	HeightxWidthxDepth	mm	990x940x320	1,430x940x320			990x940x320	1,430x940x320							
Weight	Unit		kg	78	102			80	101							
Fan - Air flow rate	Cooling	Nom.	m ³ /min	59	70			84	59	70			84			
	Heating	Nom.	m ³ /min	49	62			49	62							
Sound power level	Cooling	Nom.	dB(A)	64	66	67	69	64	66	67	69					
	Heating	Nom.	dB(A)	48	50	51	52	48	50	51	52					
Sound pressure level	Heating	Nom.	dB(A)	50	52	53		50	52	53						
	Night quiet mode	Level 1	dB(A)	43	45			43	45							
Operation range	Cooling	Ambient	Min.~Max.	-15~50												
	Heating	Ambient	Min.~Max.	-20~15.5												
Refrigerant	Type/GWP			R-410A/1,975												
Piping connections	Piping length	OU - IU	Max.	m	50	75			50	75						
		System	Equivalent	m	70	90			70	90						
	Level difference	IU - OU	Max.	m	30.0											
		IU - IU	Max.	m	0.5											
Power supply	Phase / Frequency / Voltage			Hz / V				1~ / 50 / 220-240					3N~ / 50 / 380-415			
Current - 50Hz	Maximum fuse amps (MFA)			A	20	32			16	20						



- > Wide range from 2 to 5 port units
- > Possibility to connect up to 5 indoor units
- > 3-port 40 multi outdoor unit gives an answer to lower capacity requirements of better insulated houses. The 15-class wall mounted allows efficient distribution of the lower capacity of the multi outdoor unit.
- > All indoor units can be individually controlled and do not need to be installed in the same room or even at the same time
- > Outdoor units are fitted with a Daikin swing compressor renowned for its low noise and high energy efficiency
- > Possibility to combine different types of indoor units: wall mounted, floor standing, concealed ceiling, ceiling suspended units, round flow or 4-way blow cassettes



Heating & Cooling

CONNECTABLE INDOOR UNITS	Wall mounted												Floor standing						Flexi type			Round flow cassette			Fully flat cassette				Concealed ceiling				Ceiling suspended											
	FTXG-J			CTXS-K			FTXS-K			FTXS-G			FTX-JV			FVXG-K			FVXS-F			FLXS-B			FCQG-F			FFQ-C				FDXS-F				FDBQ-B/FBQ-C8				FHQ-C				
	25	35	50	15	35	20	25	35	42	50	60	71	20	25	35	25	35	50	25	35	50	25	35	50	60	35	50	60	25	35	50	60	25	35	50	60	25	35	50	60				
2MXS40H	●	●		●	●	●	●	●					●	●	●	●	●	●	●	●	●	●	●							●	●													
2MXS50H	●	●	●	●	●	●	●	●	●	●			●	●	●	●	●	●	●	●	●	●	●	●	●					●	●	●	●	●	●	●	●							
3MXS40K	●	●		●	●	●	●	●								●	●	●	●	●	●	●	●			●	●			●	●							●	●					
3MXS52E	●	●	●	●	●	●	●	●	●	●						●	●	●	●	●	●	●	●	●	●	●	●			●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
3MXS68G	●	●	●	●	●	●	●	●	●	●	●					●	●	●	●	●	●	●	●	●	●	●	●			●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
4MXS68F	●	●	●	●	●	●	●	●	●	●	●					●	●	●	●	●	●	●	●	●	●	●	●			●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
4MXS80E	●	●	●	●	●	●	●	●	●	●	●	●				●	●	●	●	●	●	●	●	●	●	●	●			●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
5MXS90E	●	●	●	●	●	●	●	●	●	●	●	●				●	●	●	●	●	●	●	●	●	●	●	●			●	●	●	●	●	●	●	●	●	●	●	●	●	●	●



CONNECTABLE OUTDOOR UNITS																				
OUTDOOR UNIT				2MXS40H		2MXS50H		3MXS40K		3MXS52E		3MXS68G		4MXS68F		4MXS80E		5MXS90E		
Dimensions	Unit	HeightxWidthxDepth	mm	550x765x285		735x826x300		735x826x300		735x826x300		770x900x320		770x900x320		770x900x320		770x900x320		
Weight	Unit		kg	38		42		49		49		58		72		72		73		
Fan - Air flow rate	Cooling	High/Nom./Low	m ³ /min	36/33/30		37/34/34		45/-/41		45/-/45		52.7/49.4/43.5		54.5/-/46.0		57.1/54.5/46.0		57.1/54.5/46.0		
	Heating	High/Nom./Low	m ³ /min	32/32/32		34/34/34		45/-/41		45/-/41		46.4/44.5/16.3		46.0/-/14.7		52.5/-/14.7		52.5/-/14.7		
Sound power level	Cooling	High/Nom.	dB(A)	-/62		-/63		59/-		-/59		-/61		-/62		-/66		-/66		
	Heating	Nom.	dB(A)	47		48		46		46		48		48		52		52		
Sound pressure level	Heating	Nom.	dB(A)	48		50		47		47		49		49		52		52		
	Cooling	Ambient	Min.-Max. °CDB	10~46		-10~46		-10~46		-10~46		-10~46		-10~46		-10~46		-10~46		
Operation range	Heating	Ambient	Min.-Max. °CWB	-15~15.5		-15~15.5		-15~15.5		-15~15.5		-15~15.5		-15~15.5		-15~15.5		-15~15.5		
	Refrigerant	Type/GWP		R-410A/1,975		R-410A/1,975		R-410A/1,975		R-410A/1,975		R-410A/1,975		R-410A/1,975		R-410A/1,975		R-410A/1,975		
Piping connections	Liquid	OD	mm	6.35x2		6.35x3		6.35x3		6.35x3		6.35x3		6.35x4		6.35x4		6.35x5		
	Gas	OD	mm	9.52x1		12.7x1		9.52x3		9.52x2, 12.7x1		9.52x1, 12.7x2		9.52x2, 12.7x2		9.52x1, 12.7x1, 15.9x2		9.52x2, 12.7x1, 15.9x2		
	Drain	OD	mm	18		18		18		18		18		25		25		25		
	Level difference	IU - OU	Max.	m	15		15		15		15		15		15		15		15	
		IU - IU	Max.	m	7.5		7.5		7.5		7.5		7.5		7.5		7.5		7.5	
	Heat insulation				Both liquid and gas pipes															
Total piping length	System	Actual	m	30		30		50		50		60		60		70		75		
Power supply	Phase / Frequency / Voltage		Hz / V	1~ / 50 / 230		1~ / 50 / 230		1~ / 50 / 230		1~ / 50 / 230		1~ / 50 / 230		1~ / 50 / 230		1~ / 50 / 230		1~ / 50 / 230		

- › Energy efficient heating system based on air source heat pump technology
- › Low energy bills and low CO₂ emissions
- › Possibility to connect up to 9 indoor units
- › All indoor units can be individually controlled and do not need to be installed in the same room or even at the same time
- › Possibility to combine different types of indoor units: wall mounted, floor standing, concealed ceiling, ceiling suspended units, round flow or 4-way blow cassettes
- › Slim design for flexible installation
- › 3 steps in night quiet mode: step 1: 47dBA, step 2: 44 dBA, step 3: 41 dBA
- › Easy installation thanks to automatic refrigerant charging operation, automatic test operation
- › Possibility to limit peak power consumption between 30 and 80%, for example during periods with high power demand



Heating & Cooling

CONNECTABLE INDOOR UNITS	Wall mounted												Floor standing						Flexi type				Round flow cassette			Fully flat cassette				Concealed ceiling						Ceiling suspended		
	FTXG-J			CTXS-K			FTXS-K			FTXS-G			FVXG-K		FVXS-F		FLXS-B		FCQG-F			FFQ-C		FDXS-F		FDBQ-B / FBQ-C8		FHQ-C										
	25	35	50	15	35	20	25	35	42	50	60	71	25	35	50	25	35	50	25	35	50	60	35	50	60	25	35	50	60	25	35	50	60	35	50	60		
RXYSQ-P8V1	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●		

INVERTER




OUTDOOR UNIT				RXYSQ4P8V1				RXYSQ5P8V1				RXYSQ6P8V1				
Capacity range			HP	4			5			6						
Cooling capacity	Nom.		kW	12.6			14.0			15.5						
Heating capacity	Nom.		kW	14.2			16.0			18.0						
Power input - 50Hz	Cooling	Nom.		kW	3.24			3.51			4.53					
	Heating	Nom.		kW	3.12			3.86			4.57					
EER				3.89			3.99			3.42						
COP				4.55			4.15			3.94						
Maximum number of connectable indoor units				8				9				9				
Indoor index connection	Min.			50			62.5			70						
	Max.			130			162.5			182						
Dimensions	Unit	HeightxWidthxDepth		mm			1,345x900x320									
Weight	Unit			kg			120									
Sound power level	Cooling	Nom.		dBA			66			67			69			
	Sound pressure level	Cooling	Nom.		dBA			50			51			53		
Heating		Nom.		dBA			52			53			55			
Operation range	Cooling	Min.~Max.		°CDB			-5~46									
	Heating	Min.~Max.		°CWB			-20~15.5									
Refrigerant	Type			R-410A												
Piping connections	Liquid	OD		mm			9.52									
	Gas	OD		mm			19.1									
	Total piping length	System	Actual		m			115			135			145		
	Level difference	OU - IU		m			40 (Outdoor unit in highest position) / 30 (Indoor unit in highest position)									
Power supply	Phase/Frequency/Voltage			Hz/V			1N~/50/220-240									
Current - 50Hz	Maximum fuse amps (MFA)			A			32.0									

(1) EER/COP according to Eurovent 2012



BRANCH PROVIDER				BPMKS967B2				BPMKS967B3				
Connectable indoor units				1~2				1~3				
Max. indoor unit connectable capacity				14.2				20.8				
Max. connectable combination				71+71				60+71+71				
Dimensions	Height x Width x Depth			mm			180x294x350					
Weight				kg			7			8		



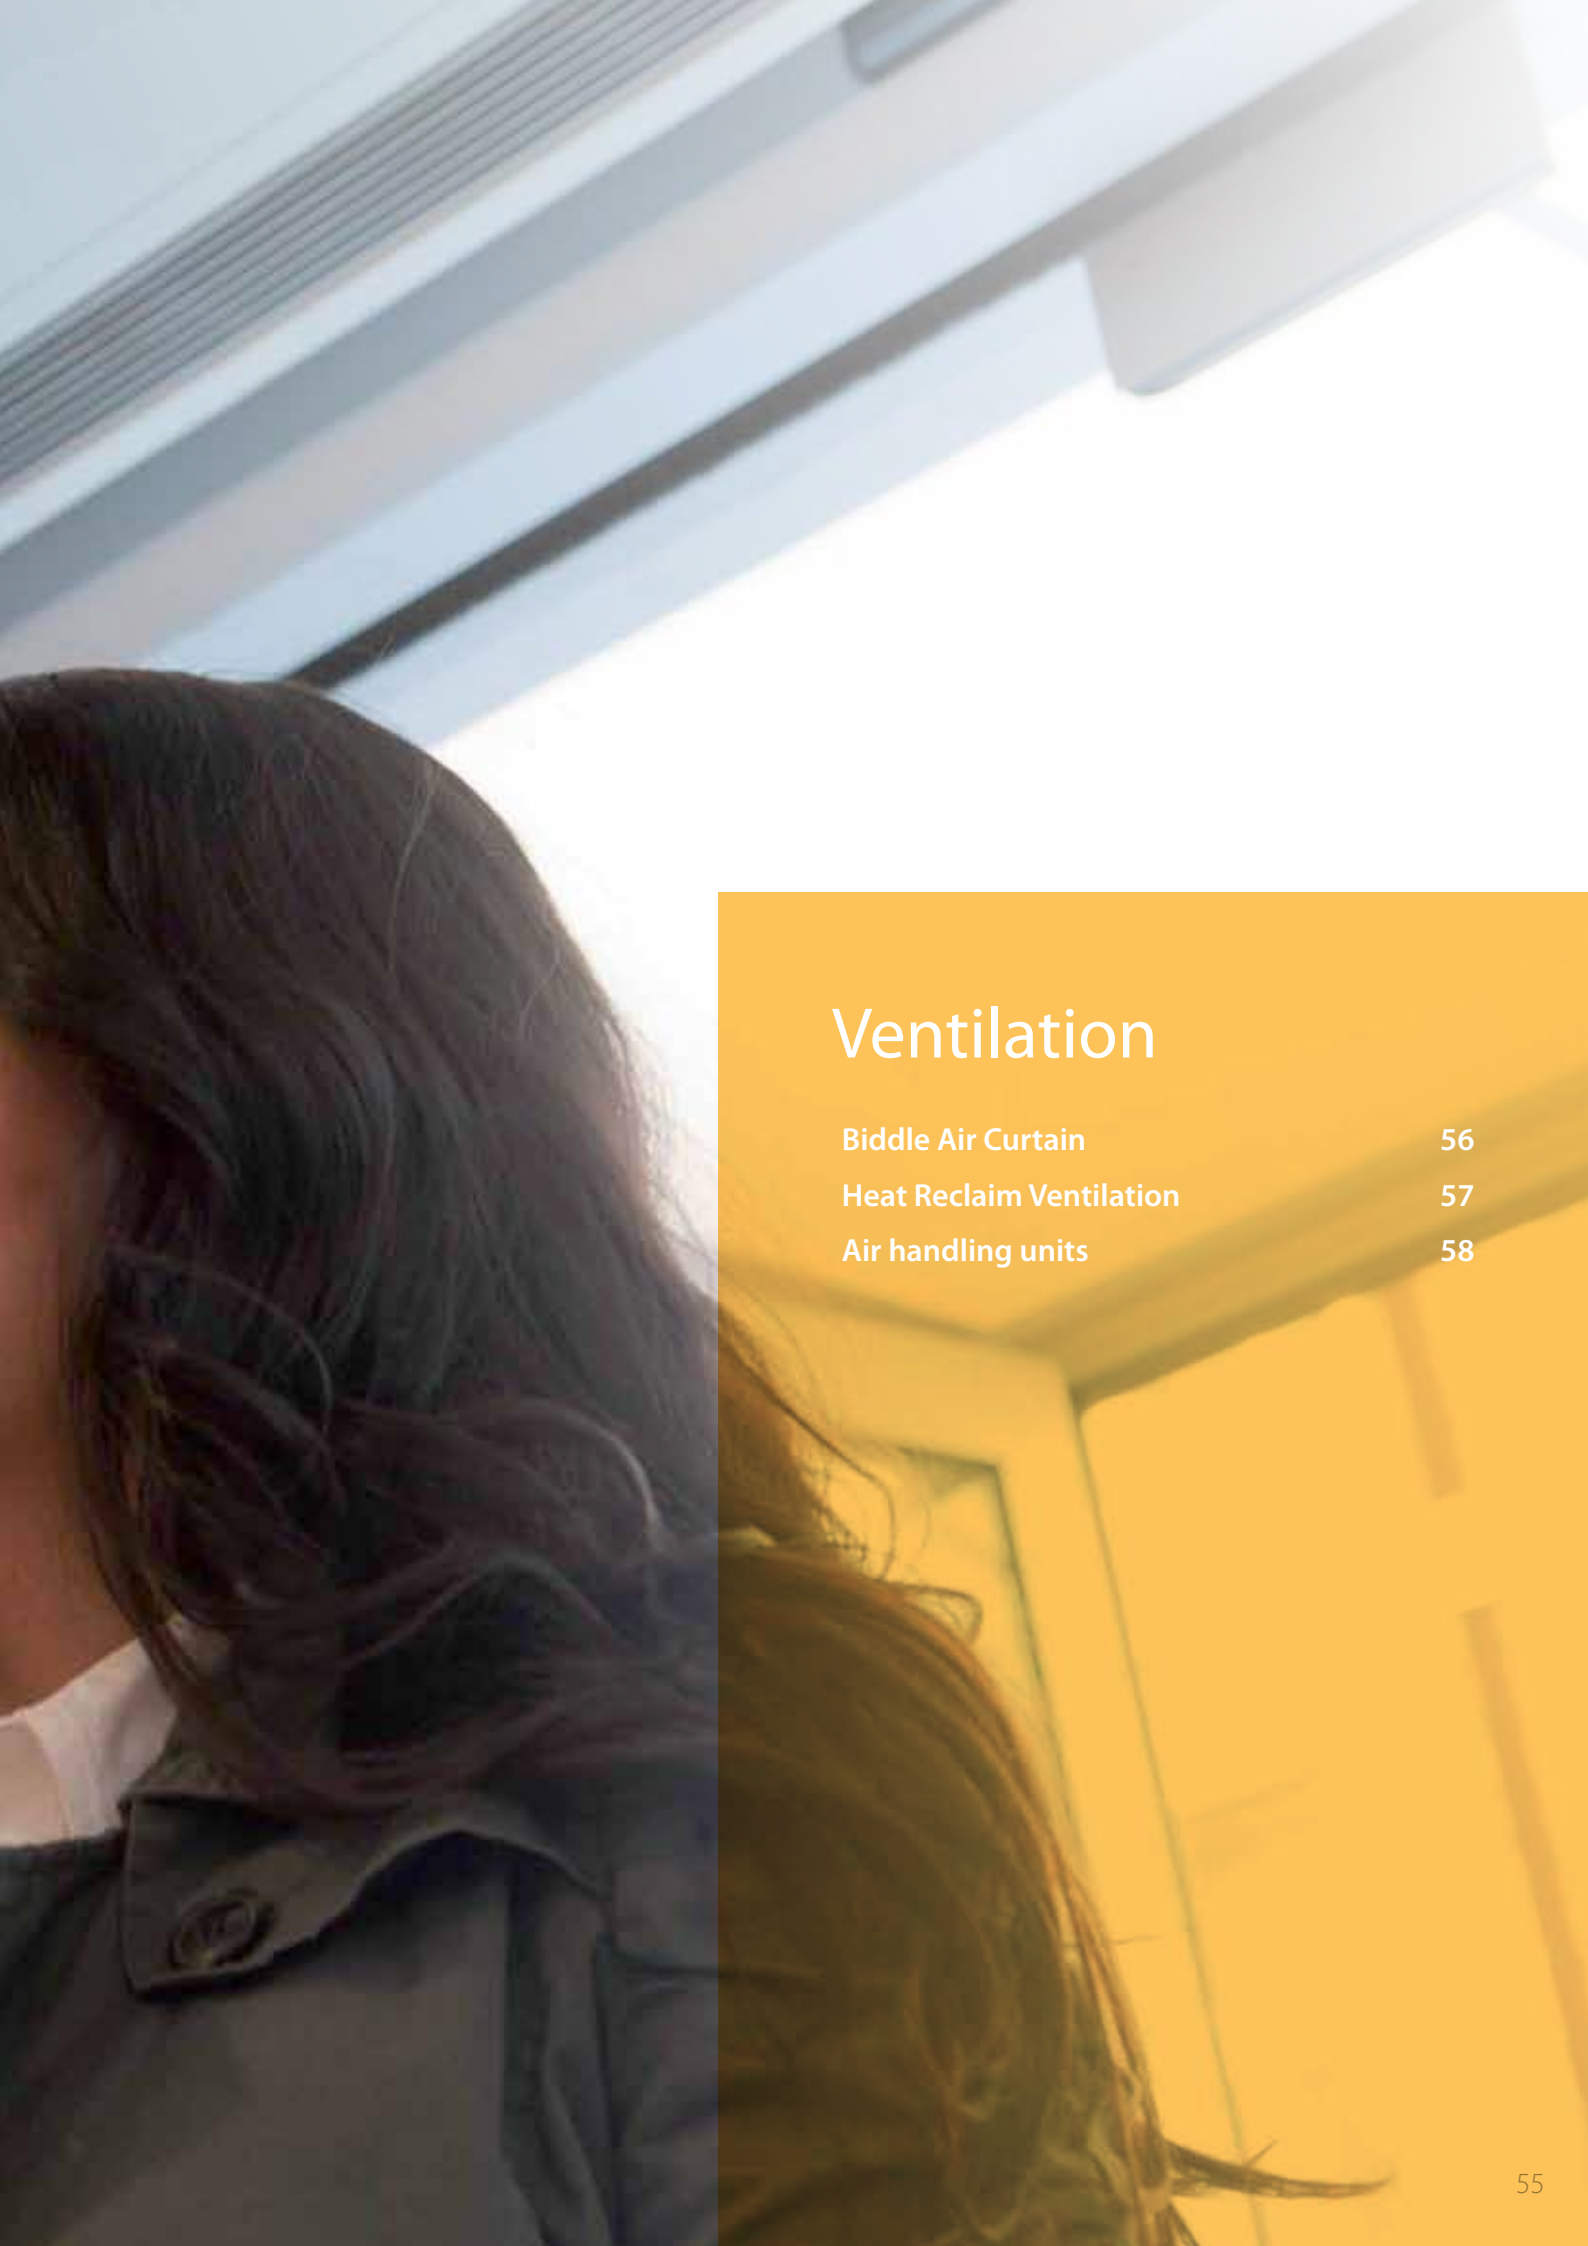

Ventilation


Biddle Air Curtain	56
Heat Reclaim Ventilation	57
Air handling units	58



CYQM150DK80FSN

- › Connectable to ERQ heat pump
- › ERQ is among the first DX system suitable for connection to air curtains
- › Free-hanging model (F): easy wall mounted installation
- › A payback period of less than 1.5 years compared to installing an electric air curtain
- › Easy and quick to install at reduced costs since no additional water systems, boilers and gas connections are required
- › Maximum energy efficiency stemming from almost zero down flow turbulence, optimised air flow and the application of advanced discharge rectifier technology
- › Around 85% air separation efficiency, greatly reducing both heat loss and required indoor unit heating capacity




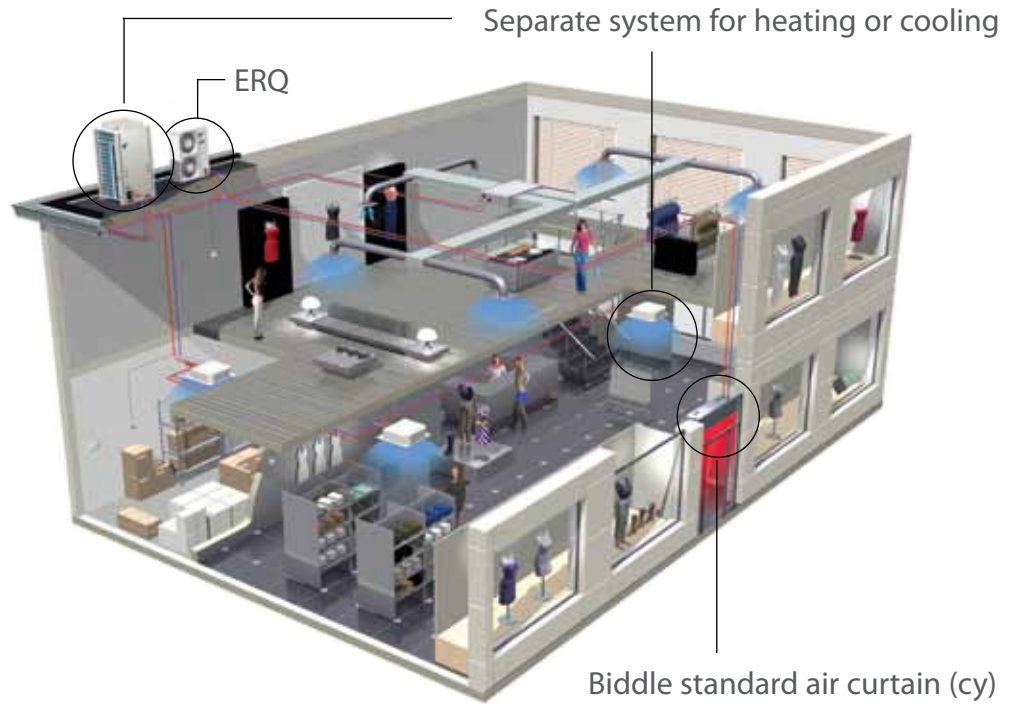

BIDDLE STANDARD AIR CURTAIN FOR CONNECTION TO ERQ				Small			Medium				
				CYQS150DK80F *BN / *SN	CYQS200DK100F *BN / *SN	CYQS250DK140F *BN / *SN	CYQM100DK80F *BN / *SN	CYQM150DK80F *BN / *SN	CYQM200DK100F *BN / *SN	CYQM250DK140F *BN / *SN	
Power input	Fan only	Nom.	kW	0.35	0.46	0.58	0.37	0.56	0.75	0.94	
	Heating	Nom.	kW	0.35	0.46	0.58	0.37	0.56	0.75	0.94	
Delta T	Inlet= room temperature		K	15			16	17	14	13	15
Casing	Colour			BN: RAL9010 / SN: RAL9006			BN: RAL9010 / SN: RAL9006				
Dimensions	Height	Unit F/C/R	mm	270 / 270 / 270			270 / 270 / 270				
	Width	Unit F/C/R	mm	1,500 / 1,500 / 1,548	2,000 / 2,000 / 2,048	2,500 / 2,500 / 2,548	1,000 / 1,000 / 1,048	1,500 / 1,500 / 1,548	2,000 / 2,000 / 2,048	2,500 / 2,500 / 2,548	
	Depth	Unit F/C/R	mm	290 / 821 / 561			290 / 821 / 561				
Required ceiling void >				420			420				
Door height	Max.		m	2.3 (1) / 2.15 (2) / 2.0 (3)	2.3 (1) / 2.15 (2) / 2.0 (3)	2.3 (1) / 2.15 (2) / 2.0 (3)	2.5 (1) / 2.4 (2) / 2.3 (3)	2.5 (1) / 2.4 (2) / 2.3 (3)	2.5 (1) / 2.4 (2) / 2.3 (3)	2.5 (1) / 2.4 (2) / 2.3 (3)	
Door width	Max.		m	1.5	2.0	2.5	1.0	1.5	2.0	2.5	
Weight	Unit		kg	66	83	107	57	73	94	108	
Fan-Air flow rate	Heating		m ³ /h	1,746	2,328	2,910	1,605	2,408	3,210	4,013	
Sound pressure level	Heating		dBa	49	50	51	50	51	53	54	
Refrigerant	Type			R-410A			R-410A				
Piping connections	Liquid (OD) / Gas			9.52 / 16.0		9.52 / 19.0	9.52 / 16.0		9.52 / 19.0		
Required accessories (should be ordered separately)				Daikin wired remote control (BRC1E52A/B or BRC1D52)			Daikin wired remote control (BRC1E52A/B or BRC1D52)				
Power supply	Voltage		V	230			230				

BIDDLE STANDARD AIR CURTAIN FOR CONNECTION TO ERQ				Large			
				CYQL100DK125F*BN / *SN	CYQL150DK200F*BN / *SN	CYQL200DK250F*BN / *SN	CYQL250DK250F*BN / *SN
Power input	Fan only	Nom.	kW	0.75	1.13	1.50	1.88
	Heating	Nom.	kW	0.75	1.13	1.50	1.88
Delta T	Inlet= room temperature		K	15		14	12
Casing	Colour			BN: RAL9010 / SN: RAL9006			
Dimensions	Height	Unit F/C/R	mm	370 / 370 / 370			
	Width	Unit F/C/R	mm	1,000 / 1,000 / 1,048	1,500 / 1,500 / 1,548	2,000 / 2,000 / 2,048	2,500 / 2,500 / 2,548
	Depth	Unit F/C/R	mm	745 / 745 / 745			
Required ceiling void >				520			
Door height	Max.		m	3.0 (1) / 2.75 (2) / 2.5 (3)	3.0 (1) / 2.75 (2) / 2.5 (3)	3.0 (1) / 2.75 (2) / 2.5 (3)	3.0 (1) / 2.75 (2) / 2.5 (3)
Door width	Max.		m	1.0	1.5	2.0	2.5
Weight	Unit		kg	76	100	126	157
Fan-Air flow rate	Heating		m ³ /h	3,100	4,650	6,200	7,750
Sound pressure level	Heating		dBa	53	54	56	57
Refrigerant	Type			R-410A			
Piping connections	Liquid (OD) / Gas			9.52 / 16.0	9.52 / 16.0	9.52 / 22.0	
Required accessories (should be ordered separately)				Daikin wired remote control (BRC1E52A/B or BRC1D52)			
Power supply	Voltage		V	230			


F: Freehanging model, C: Cassette model, R: Recessed model
 (1) Favourable condition | (2) Normal condition | (3) Unfavourable condition

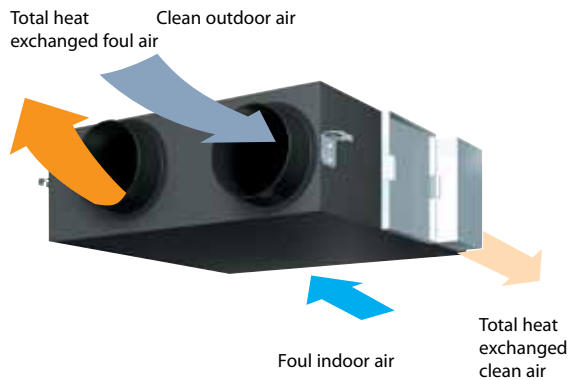


The Daikin heat reclaim ventilation system modulates the temperature and humidity of incoming fresh air to match indoor conditions. A balance is thus achieved between indoor and outdoor ambients, enabling the cooling or heating load placed on the air conditioning system to be reduced significantly. HRV units can be controlled individually or integral with the air conditioning system (Daikin VRV or Sky Air series).

- > Energy saving ventilation using indoor heating, cooling and moisture recovery
- > Ideal solution for shops, restaurants or offices requiring maximum floor space for furniture, decorations and fittings
- > Free cooling when outdoor temperature is below indoor temperature (eg. during night time)
- > Low energy consumption thanks to DC fan motor on 350 to 2000 units
- > Prevent energy losses from over-ventilation while maintaining indoor air quality with optional CO₂ sensor
- > Can be used as stand alone or integrated in the Sky Air or VRV system
- > Wide range of units: air flow rate from 150 up to 2,000 m³/h
- > Optional medium and fine dust filters M6, F7, F8 to meet customer request or legislation
- > Shorter installation time thanks to easy adjustment of nominal air flow rate, so less need for dampers compared with traditional installations
- > Specially developed heat exchange element with High Efficiency Paper (HEP)
- > No drain piping needed
- > Can operate in over- and under pressure
- > Total solution for fresh air with Daikin supply of both VAM and electrical heater



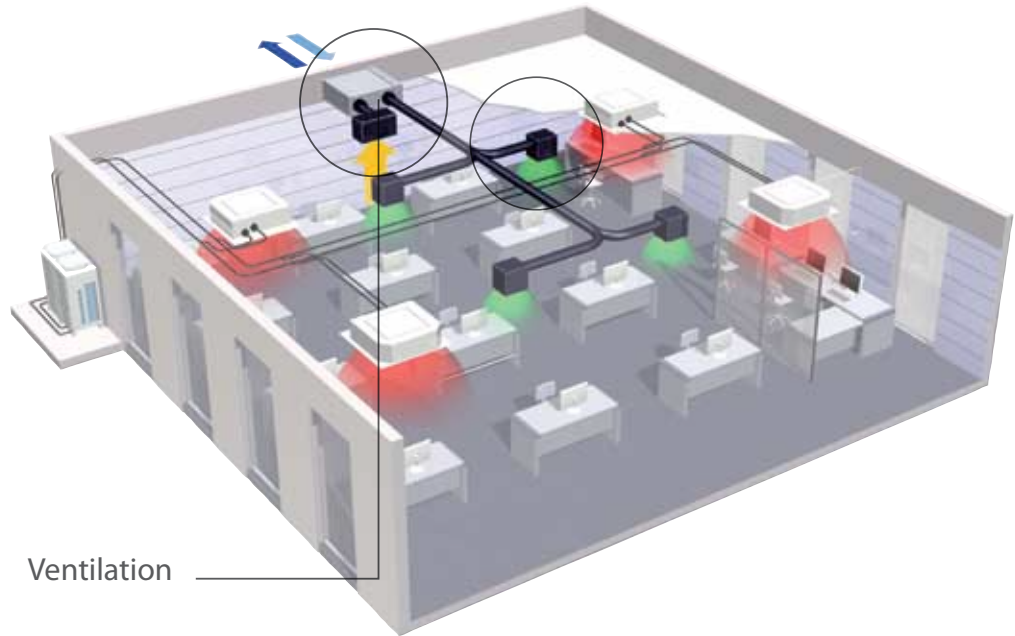

High Efficiency Paper

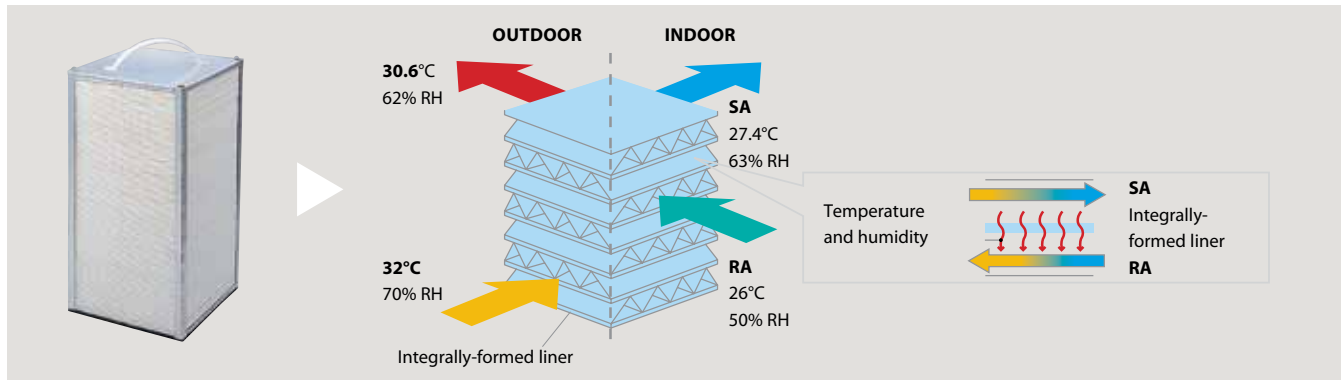

RH: Relative Humidity SA: Supply Air (to room) RA: Return Air (from room)

VENTILATION				VAM150FA	VAM250FA	VAM350FB	VAM500FB	VAM650FB	VAM800FB	VAM1000FB	VAM1500FB	VAM2000FB			
Power input - 50Hz	Heat exchange mode	Nom.	Ultra high	kW		0.116	0.141	0.132	0.178	0.196	0.373	0.375	0.828	0.852	
	Bypass mode	Nom.	Ultra high	kW		0.116	0.141	0.132	0.178	0.196	0.373	0.375	0.828	0.852	
Temperature exchange efficiency - 50Hz	Ultra high		%		74	72	75	74		75		75			
	Enthalpy exchange efficiency - 50Hz	Cooling	Ultra high	%		58		61		58		60		61	
Heating		Ultra high	%		64		65		62		63		65		
Operation mode				Heat exchange mode / Bypass mode / Fresh-up mode											
Heat exchange system				Air to air cross flow total heat (sensible + latent heat) exchange											
Heat exchange element				Specially processed non-flammable paper											
Dimensions	Unit	HeightxWidthxDepth	mm			285x776x525		301x828x816		364x1,004x868		364x1,004x1,156	726x1,512x868	726x1,512x1,156	
Weight	Unit			kg		24		33		52		55	64	131	152
Fan-Air flow rate - 50Hz	Heat exchange mode	Ultra high	m ³ /h		150	250	350	500	650	800	1,000	1,500	2,000	2,000	
	Bypass mode	Ultra high	m ³ /h		150	250	350	500	650	800	1,000	1,500	2,000	2,000	
Fan-External static pressure - 50Hz	Ultra high		Pa		69	64	98		93	137	157	137			
Sound pressure level - 50Hz	Heat exchange mode	Ultra high	dBA		27 / 28.5	28 / 29	32	33	34.5	36		39.5	40		
	Bypass mode	Ultra high	dBA		27 / 28.5	28 / 29	32	33.5	34.5	36		40.5	40		
Operation range	Min.			°CDB										-15	
	Max.			°CDB										50	
	Relative humidity			%										80% or less	
Connection duct diameter			mm		100	150		200		250		350			
Power supply	Phase/Frequency/Voltage		Hz/V						1~/50/60/220-240/220						
Current	Maximum fuse amps (MFA)		A		15				16						

Total solution for fresh air with Daikin supply of both VAM and electrical heaters

- > Increased comfort in low outdoor temperature thanks to the heated outdoor air
- > Integrated electrical heater concept (no additional accessories required)
- > Standard dual flow and temperature sensor
- > Flexible setting with adjustable setpoint
- > Increased safety with 2 cut-outs: manual & automatic
- > BMS integration thanks to:
 - Volt free relay for error indication
 - 0-10VDC input for setpoint control
- > Capacities ranging from 1 to 2.5 kW




Daikin Air handling units

For small to large commercial spaces Daikin offers a range of R-410A inverter condensing units for use in conjunction with air handling units. In situations where Daikin commercial range ventilation units cannot satisfy the ventilation requirement due to building constraints (large atriums, banquet halls etc), air handling units represent the ideal solution. Air handling units provide large fresh air volumes (> 1,000 m³/h) and high ESPs enabling the use of extensive ductwork runs.

An air handler or air handling unit provides a tailor-made solution for optimising air conditions throughout multiple spaces. An air handler can be customised to your building - with no installation restrictions or design limitations - as air handler units are based on a completely unique modular design, so they can be sized (in increments of 1 cm) to your exact requirements.

WIDE RANGE OF AIR FLOWS

Daikin's wide range of air handling systems handle air flow rates from 500 m³/h up to 140,000 m³/h. The air handler unit can be adapted to deliver whatever air flow you require, via the specific dimensions of flow section available at the installation.

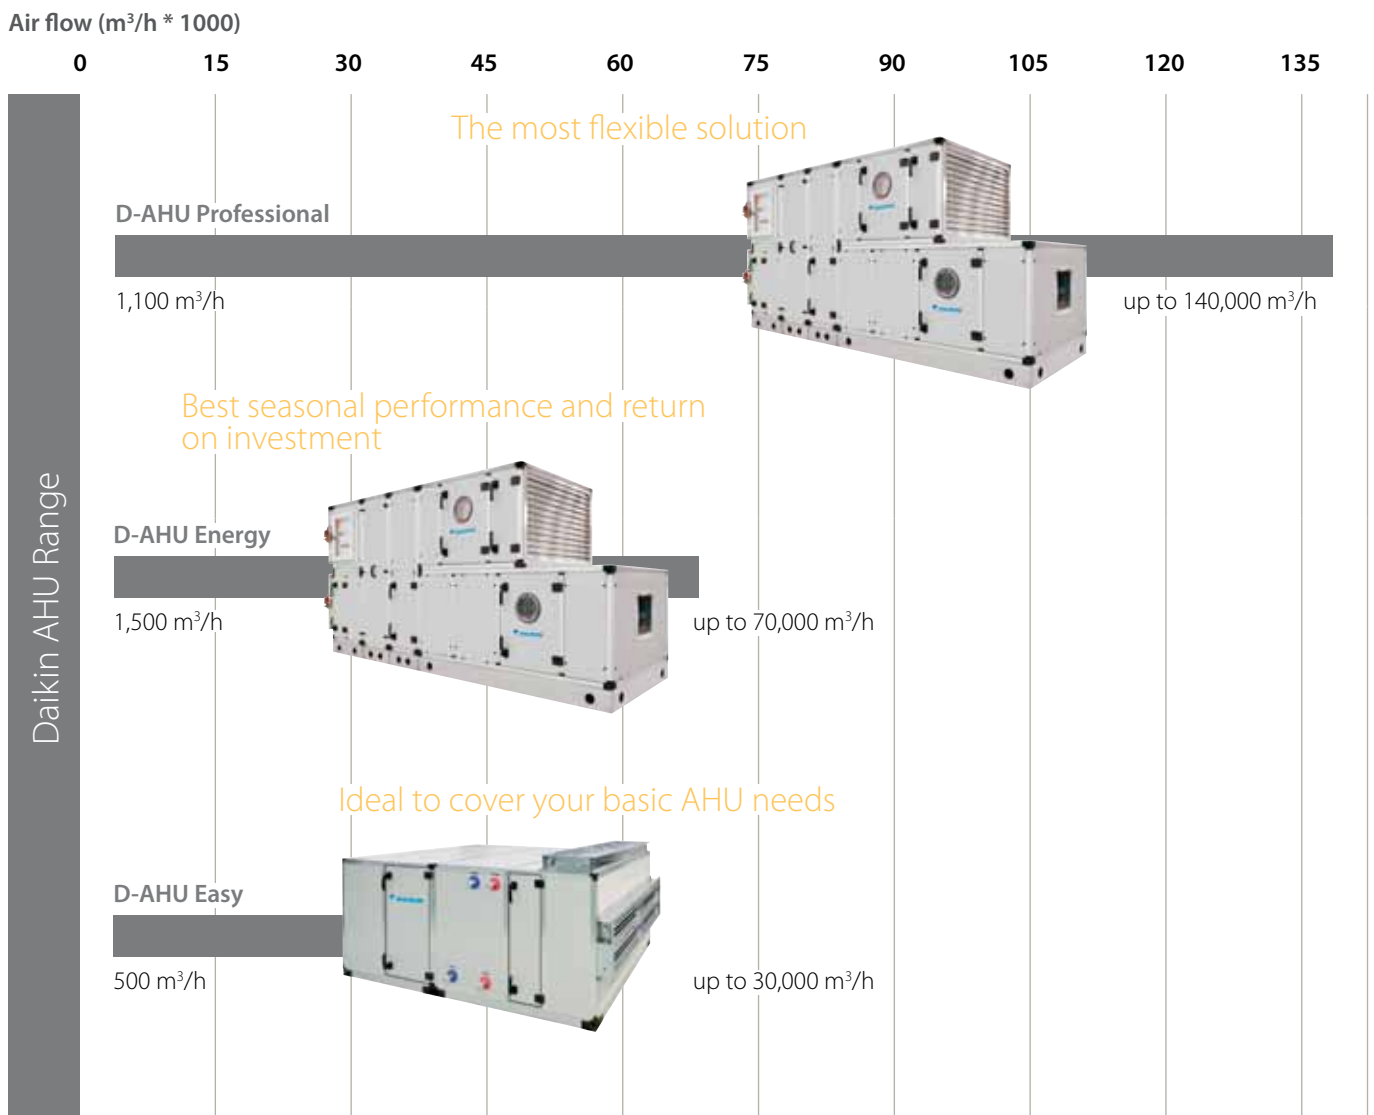

RETURN ON INVESTMENT

The air handling unit (AHU) is critical to an effective climate control system and, although the initial investment can appear high, the savings generated by our advanced designs and operating efficiencies guarantee a rapid return on the investment made. Our AHU Energy series has been designed to deliver exceptional performance thus driving down the energy consumed and so lowering energy bills. Taken over the expected 15-year life-span of the equipment, this will result in a substantial saving, especially in a time of ever increasing energy prices.

PRE-DEFINED SIZES

27 fixed sizes are available, optimized to reach the best compromise between competitiveness and manufacturing standardisation. However, Daikin's section by section design means that units can be sized by 1cm increments and assembled on site, without welding, to suit the space constraints of the installation.

HIGH EFFICIENCY COMPONENTS

All Daikin air handlers have been designed for optimum energy efficiency. Polyurethane or Mineral wool panels guarantee excellent thermal insulation performance. Filters are provided with a large choice of efficiency filtration class.

DAIKIN FRESH AIR PACKAGE

The "Daikin Fresh Air Package" provides a complete Plug & Play Solution including AHU, ERQ or VRV Condensing Unit and all unit control (EKEQ, EKEX, DDC controller) factory mounted and configured. The easiest solution with only one point of contact.



ASTRA is the powerful software that Daikin has developed to offer a quick and comprehensive service for the customer in order to make the technical choice and the economic valorization of each AHU. It is a complete tool that can configure any type of product and respond exactly to the strictest design needs. The result is a comprehensive economic offer including all the technical data and drawings, the psychrometric diagram with the relative air treatment and the fans' performance curves.

The ASTRA software features a specific DX heat pump coil section able to calculate cooling and heating performances with the automatic selection of the appropriate Daikin expansion valve.

Why use ERQ for connection to air handling units?

HIGH EFFICIENCY

Daikin heat pumps are renowned for their high energy efficiency with COPs up to 4.56 in heating¹.

¹ ERQ100AV1 heat pump

HIGH COMFORT LEVELS

Daikin ERQ units respond rapidly to fluctuations in the supply air temperature, resulting in a steady indoor temperature, together with the dehumidification this results in high comfort levels for the end user.

EASY DESIGN AND INSTALLATION

The system is easy to design and install since no additional water systems such as boilers, tanks and gas connections etc are required. This also reduces the total system cost.

Flexible control options

IN ORDER TO MAXIMIZE INSTALLATION FLEXIBILITY,
3 TYPES OF CONTROL SYSTEMS ARE OFFERED.

Control x:

Control of air temperature (discharge temperature, suction temperature, room temperature) via external device (DDC controller)

Control y:

Control of evaporating temperature via Daikin control (no DDC controller needed)

Control z:

Control of air temperature (suction temperature, room temperature) via Daikin control (no DDC controller needed)


Control possibilities for air handling applications

In order to maximise installation flexibility, 3 types of control systems are offered:

POSSIBILITY X (TD/TR CONTROL):

Air temperature control via DDC controller


Room temperature is controlled as a function of the air handling unit suction or discharge air (customer selection). The DDC controller is translating the temperature difference between set point and air suction temperature (or air discharge temperature or room temperature) into a reference voltage (0-10V) which is transferred to the Daikin control box (EKEQFCBA). This reference voltage will be used as the main input value for the compressor frequency control.

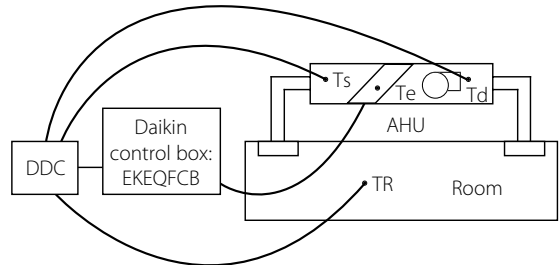

POSSIBILITY Y (TE/TC CONTROL):

By fixed evaporating temperature

A fixed target evaporating temperature of between 3°C and 8°C can be set by the customer. In this case, room temperature is only indirectly controlled. The cooling load is determined from the actual evaporating temperature (i.e. load to the heat exchanger). A Daikin wired remote controller (BRC1D52 or BRC1E52A/B - optional) can be connected for error indication.

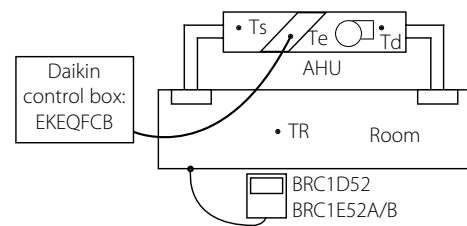


POSSIBILITY Z (TS/TR CONTROL):

Using Daikin wired remote controller (BRC1D52 or BRC1E52A/B - optional)

Set point can be fixed via standard Daikin wired remote controller. Remote ON/OFF can be achieved by an optional adapter KRP4A51.

No external DDC controller should be connected. The cooling load is determined from the air suction temperature and set point on the Daikin controller.

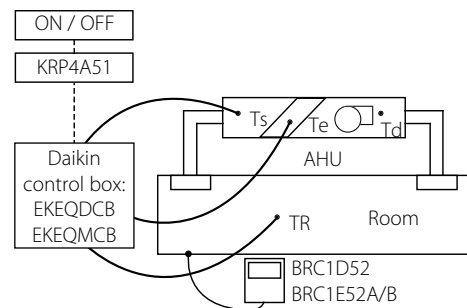

- Ts = Air suction temperature
- Td = Air discharge temperature
- Tr = Room temperature
- Te = Evaporating temperature
- AHU = Air Handling Unit
- DDC = Digital Display Controller


	OPTION KIT	FEATURES
Possibility x	EKEQFCB	DDC controller is required Temperature control using air suction or air discharge temperature
Possibility y		Using fixed evaporating temperature, no set point can be set using remote controller
Possibility z	EKEQDCB EKEQMCB*	Using Daikin wired remote controller BRC1D52 or BRC1E52A/B Temperature control using air suction temperature

* EKEQMCB (for 'multi' application)

A range of R-410A inverter condensing units for pair application with air handling units.

- > Inverter controlled units
- > Large capacity range (from 100 to 250 class)
- > Heat pump
- > R-410A
- > Wide range of expansion valve kits available
- > Up to 5 ERQ units can be connected to an interlaced coil in one air handling unit

The “Daikin Fresh Air Package” provides a complete Plug & Play Solution including AHU, ERQ or VRV Condensing Unit and all unit control (EKEQ, EKEX, DDC controller) factory mounted and configured. The easiest solution with only one point of contact.

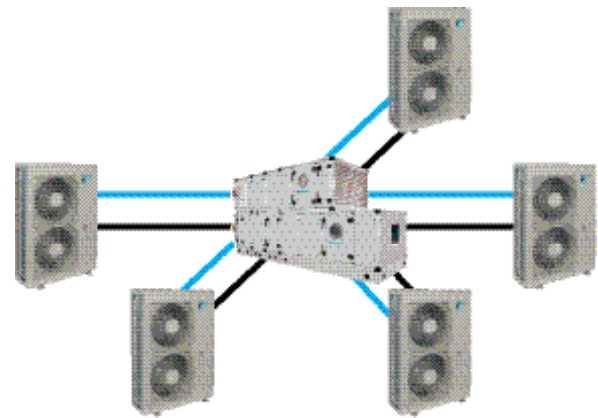

— F1 - F2
 — Refrigerant piping

VENTILATION					ERQ100AV1	ERQ125AV1	ERQ140AV1	
Capacity range				HP	4	5	6	
Cooling capacity	Nom.			kW	11.2	14.0	15.5	
Heating capacity	Nom.			kW	12.5	16.0	18.0	
Power input	Cooling	Nom.		kW	2.81	3.51	4.53	
	Heating	Nom.		kW	2.74	3.86	4.57	
EER					3.99		3.42	
COP					4.56	4.15	3.94	
Dimensions	Unit	HeightxWidthxDepth		mm	1,345x900x320			
Weight	Unit			kg	120			
Fan-Air flow rate	Cooling	Nom.		m ³ /min	106			
	Heating	Nom.		m ³ /min	102	105		
Sound power level	Cooling	Nom.		dBA	66	67	69	
Sound pressure level	Cooling	Nom.		dBA	50	51	53	
	Heating	Nom.		dBA	52	53	55	
Operation range	Cooling	Min./Max.		°CDB	-5/46			
	Heating	Min./Max.		°CWB	-20/15.5			
	On coil temperature	Heating	Min.		°CDB	10		
		Cooling	Max.		°CDB	35		
Refrigerant	Type				R-410A			
Piping connections	Liquid	OD		mm	9.52			
	Gas	OD		mm	15.9	19.1		
	Drain	OD		mm	26x3			
Power supply	Phase/Frequency/Voltage			Hz/V	1N~/50/220-240			
Current	Maximum fuse amps (MFA)			A	32.0			

VENTILATION					ERQ125AW1	ERQ200AW1	ERQ250AW1	
Capacity range				HP	5	8	10	
Cooling capacity	Nom.			kW	14.0	22.4	28.0	
Heating capacity	Nom.			kW	16.0	25.0	31.5	
Power input	Cooling	Nom.		kW	3.52	5.22	7.42	
	Heating	Nom.		kW	4.00	5.56	7.70	
EER					3.98	4.29	3.77	
COP					4.00	4.50	4.09	
Dimensions	Unit	HeightxWidthxDepth		mm	1,680x635x765	1,680x930x765		
Weight	Unit			kg	159	187	240	
Fan-Air flow rate	Cooling	Nom.		m ³ /min	95	171	185	
	Heating	Nom.		m ³ /min	95	171	185	
Sound power level	Nom.			dBA	72	78		
Sound pressure level	Nom.			dBA	54	57	58	
Operation range	Cooling	Min./Max.		°CDB	-5/43			
	Heating	Min./Max.		°CWB	-20/15			
	On coil temperature	Heating	Min.		°CDB	10		
		Cooling	Max.		°CDB	35		
Refrigerant	Type				R-410A			
Piping connections	Liquid	OD		mm	9.52			
	Gas	OD		mm	15.9	19.1	22.2	
Power supply	Phase/Frequency/Voltage			Hz/V	3N~/50/400			
Current	Maximum fuse amps (MFA)			A	16	25		

Overview of expansion valves and control boxes

Daikin also offers a range of expansion valve kits and control boxes to connect ERQ to third party air handling units.

ERQ COMBINATION TABLE

OUTDOOR UNIT		EXPANSION VALVE KIT						
		CLASS 63	CLASS 80	CLASS 100	CLASS 125	CLASS 140	CLASS 200	CLASS 250
		EKEXV63	EKEXV80	EKEXV100	EKEXV125	EKEXV140	EKEXV200	EKEXV250
1~	ERQ100AV1	P	P	P	P	-	-	-
	ERQ125AV1	P	P	P	P	P	-	-
	ERQ140AV1	-	P	P	P	P	-	-
3~	ERQ125AW1	P	P	P	P	P	-	-
	ERQ200AW1	-	-	P	P	P	P	P
	ERQ250AW1	-	-	-	P	P	P	P

P: Pair. Combination depending on air handling units coils volume.



EKEXV - EXPANSION VALVE KIT FOR AIR HANDLING APPLICATIONS

VENTILATION				EKEXV50	EKEXV63	EKEXV80	EKEXV100	EKEXV125	EKEXV140	EKEXV200	EKEXV250
Dimensions	Unit	HeightxWidthxDepth		mm							
				401x215x78							
Weight	Unit			kg							
				2.9							
Sound pressure level	Nom.			dBA							
				45							
Operation range	On coil temperature	Heating	Min.	°CDB							
		Cooling	Max.	°CDB							
				10 (1)							
				35 (2)							
Refrigerant	Type			R-410A							
Piping connections	Liquid	OD	mm	6.35				9.52			
	Gas	OD	mm	6.35				9.52			

(1) The temperature of the air entering the coil in heating mode can be reduced to -5°CDB. Contact your local dealer for more information. (2) 45% Relative humidity.



EKEQ - CONTROL BOX FOR AIR HANDLING APPLICATIONS

VENTILATION				EKEQFCB				EKEQDCB			
Application								Pair			
Outdoor unit								ERQ			
Dimensions	Unit	HeightxWidthxDepth						mm			
								132x400x200			
Weight	Unit							kg			
								3.9			
Power supply	Phase/Frequency/Voltage							Hz/V			
								1~/50/230			






Control systems

Individual control systems 68

- Wired / infrared remote control 68
- Control systems Siesta Sky Air 70

Centralised control systems 74

- Centralised remote control / Unified ON/OFF control / Schedule timer 74
- DTA113B51 75
-  75

Management control 76

- NEW  76

Standard protocol interfaces 78

- KNX Interface 78
- BACnet Interface** 79
- LonWorks Interface** 79

Sensors & other devices

- Wireless room temperature sensor 80
- Wired room temperature sensor 80
- Other intergration devices 81

Option lists

- Sky Air 83



BRC944B2*/BRC1D52

Wired remote control

- > Schedule timer:
 - Five day actions can be set as follows:
 - set point: unit is switched ON and normal operation is maintained
 - OFF: unit is switched OFF¹
 - limits: unit is switched ON and min./max. control (cf. limit operation for more details)
- > Home leave (frost protection): during absence, the indoor temperature can be maintained at a certain level. This function can also switch the unit ON/OFF
- > User friendly HRV function, thanks to the introduction of a button for ventilation mode and fan speed
- > Constantly monitoring of the system for malfunctions in a total of 80 components
- > Immediate display of fault location and condition
- > Reduction of maintenance time and costs

Display

- > Operating mode¹
- > Heat Recovery Ventilation (HRV) in operation
- > Cool / heat changeover control
- > Centralised control indication
- > Group control indication
- > Set temperature¹
- > Air flow direction¹
- > Programmed time
- > Inspection test / operation
- > Fan speed¹
- > Clean air filter
- > Defrost / hot start
- > Malfunction

¹ Only functions marked with '1' are available on BRC944B2

ARC4*/BRC4*/BRC7*

Infrared remote control

Operation buttons: ON/OFF, timer mode start/stop, timer mode on /off, programme time, temperature setting, air flow direction (1), operating mode, fan speed control, filter sign reset (2), inspection (2)/test indication (2)

Display: Operating mode, battery change, set temperature, air flow direction (1), programmed time, fan speed, inspection/test operation (2)

1. Not applicable for FXDQ, FXSQ, FXNQ, FBDQ, FDXS, FBQ
2. For FX** units only
3. For all features of the remote control, refer to the operation manual

Save energy

A series of energy saving functions that can be individually selected

- > Temperature range limit
- > Setback function
- > Presence & floor sensor connection (available on new round flow cassette)
- > kWh indication
- > Set temperature auto reset
- > Off timer

Temperature range limit avoids excessive heating or cooling

Save energy by constraining the lower temperature limit in cooling and upper temperature limit in heating mode.

note : Also available in auto cooling/heating change over mode.

kWh indication keeps track of your consumption

The kWh indication shows an indicative electricity consumption of the last day/month/year.

Other functions

- > Up to 3 independent schedules can be set, so the user can easily change the schedule himself throughout the year (e.g. Summer, winter, mid-season)
- > Possibility to individually restrict menu functions
Easy to use: all main functions directly accessible
- > Easy setup: clear graphical user interface for advanced menu settings
- > Real time clock with auto update to daylight saving time
- > Built-in backup power: when a power failure occurs all settings remain stored up to 48 hours
- > Supports multiple languages
 - English, German, Dutch, Spanish, Italian, Portuguese, French, Greek, Russian, Turkish, Polish (BRC1E52A)
 - English, German, Czech, Croatian, Hungarian, Romanian, Slovenian, Bulgarian, Slovak, Serbian, Albanian (BRC1E52B)





Graphical display of indicative electricity consumption



Overview of controllers for Siesta Sky Air

Siesta Sky Air indoor units	Controllers
ACQ*A 4-way blow, ceiling mounted cassette ACQ-B	- Standard wireless remote controller in box of decoration panel ADP125A - Optional wired remote controller ARCWB
AHQ*C ceiling suspended	- Standard wireless remote controller in box of indoor unit - Optional wired remote controller ARCWB
ABQ*A concealed ceiling ABQ*B	Standard wired remote controller (ARCWA) in box of indoor unit

Overview of features

Feature		ARCWA	ARCWB
		Standard with ABQ* A/B	Option for AHQ*C and ACQ-A/B
			
1	ON/OFF switch	Standard	Standard
2	Temperature setting		
	- default range 16-30°C	Standard	Standard
	- optional range 20-30°C	By dipswitch selection	By dipswitch selection
	- switch between °C and °F	Standard	Standard
3	Room temperature display	Standard	Not available
4	Room temperature sensor on remote controller	Standard	Standard
5	Cool / Fan dry / Heat / Auto	Standard	Standard
6	Sleep mode	Standard	Standard
7	Fan Speed selection	Standard	Standard
8	Delay timer	1, 2 & 4 hours delay	1, 2 & 4 hours delay
9	7-days programmable timer	Standard	Standard
10	Real time clock display	Standard	Standard
11	Air swing selection		
	- ON/OFF swing mode	Standard	Standard
	- Change swing option (draft/soil prevention or standard)	Not available	Standard
12	LCD display without backlight	Standard	Standard
13	Key lock	Standard	Standard
14	Error code indication	Standard	Standard
15	IR receiver to enable compatibility with wireless remote controller (disabled when lock function is activated)	Standard	Standard
16	Last state memory from indoor PCB	Standard	Standard
17	Silent mode	Not available	By dipswitch selection
18	Turbo mode	Not available	By dipswitch selection
19	Compressor test model (compressor force ON)	Standard	Standard
20	Daikin inverter error code	Not available	Standard
21	UART communication port (for Daikin protocol)	Not available	Standard
22	Backup battery	Standard	Standard

Specifications

Dimensions (length x width x height) ARCWB: 0.15 m x 0.21 m x 0.04 m.

ARCWB comes standard with a 10 meter wire, which can be extended to maximum wire length of 15 meter. For reference: ARCWA comes standard with a 10 meter **wire**, which cannot be extended.

ARCWB & ARCWA can only control **one indoor unit** at a time; group control is only possible when using option R04084124324.



Integration of RA, Sky Air, VRV and AHU in BMS or home automation systems



RTD-RA

- › Modbus interface for monitoring and control of residential indoor units

RTD-NET

- › Modbus interface for monitoring and control of Sky Air, VRV, VAM and VKM

RTD-10

- › Advanced integration into BMS of Sky Air, VRV, VAM and VKM through either:
 - Modbus
 - Voltage (0-10V)
 - Resistance
- › Duty/standby function for server rooms






RTD-20

- › Advanced control of Sky Air, VRV, VAM/VKM and air curtains
- › Clone or independent zone control
- › Increased comfort with integration of CO₂ sensor for fresh air volume control
- › Save on running costs via
 - pre/post and trade mode
 - set point limitation
 - overall shut down
 - PIR sensor for adaptive deadband

RTD-HO

- › Modbus interface for monitoring and control of Sky Air, VRV, VAM and VKM
- › Intelligent hotel room controller

Overview functions

							
MAIN FUNCTIONS			RTD-RA	RTD-NET	RTD-10	RTD-20	RTD-HO
Dimensions	H x W x D	mm	80 x 80 x 37,5	100 x 100 x 22			
Key card + window contact							✓
Set back function			✓				✓
Prohibit or restrict remote control functions (setpoint limitation, ...)			✓	✓	✓	✓**	✓
Modbus (RS485)			✓	✓	✓	✓	✓
Group control			✓(1)	✓	✓	✓	✓
0 - 10 V control					✓	✓	
Resistance control					✓	✓	
IT application			✓		✓		
Heating interlock					✓	✓	
Output signal (on/defrost, error)					✓	✓****	✓
Retail application						✓	
Partitioned room control						✓	
Air curtain				✓**	✓**	✓	

(1): By combining RTD-RA devices

CONTROL FUNCTIONS	RTD-RA	RTD-NET	RTD-10	RTD-20	RTD-HO
On/Off	M,C	M	M,V,R	M	M*
Set point	M	M	M,V,R	M	M*
Mode	M	M	M,V,R	M	M*
fan	M	M	M,V,R	M	M*
Louver	M	M	M,V,R	M	M*
HRV Damper control		M	M,V,R	M	
Prohibit/Restrict functions	M	M	M,V,R	M	M*
Forced thermo off	M				

MONITORING FUNCTIONS	RTD-RA	RTD-NET	RTD-10	RTD-20	RTD-HO
On/Off	M	M	M	M	M
Set point	M	M	M	M	M
Mode	M	M	M	M	M
fan	M	M	M	M	M
Louver	M	M	M	M	M
RC temperature		M	M	M	M
RC mode		M	M	M	M
nbr units		M	M	M	M
Fault	M	M	M	M	M
Fault code	M	M	M	M	M
Return air temperature (Average /Min/Max)	M	M	M	M	M
Filter alarm		M	M	M	M
Termo on	M	M	M	M	M
Defrost		M	M	M	M
Coil In/Out temperature	M	M	M	M	M

Centralised control systems



DCS302C51



DCS301B51



DST301B51

Centralised control of the Sky Air system can be achieved via 3 user friendly compact controls: centralised remote control, unified on/off control and schedule timer. These controls may be used independently or in combination where 1 group = several (up to 16) indoor units in combination and 1 zone = several groups in combination.

A centralised remote control is ideal for use in tenanted commercial buildings subject to random occupation, enabling indoor units to be classified in groups per tenant (zoning).

The schedule timer programmes the schedule and operation conditions for each tenant and the control can easily be reset according to varying requirements.



DCS302C51

Centralised remote control

Providing individual control of 64 groups (zones) of indoor units.

- a maximum of 64 groups (128 indoor units, max. 10 outdoor units) can be controlled
- a maximum of 128 groups (128 indoor units, max. 10 outdoor units) can be controlled via 2 centralised remote controls in separate locations
- zone control
- group control
- malfunction code display
- maximum wiring length of 1,000m (total: 2,000m)
- expanded timer function

DCS301B51

Unified ON/OFF control

Providing simultaneous and individual control of 16 groups of indoor units.

- a maximum of 16 groups (128 indoor units) can be controlled
- 2 remote controls in separate locations can be used
- operating status indication (normal operation, alarm)
- centralised control indication
- maximum wiring length of 1,000m (total: 2,000m)

DST301B51


Schedule timer

Enabling 64 groups to be programmed.

- a maximum of 128 indoor units can be controlled
- 8 types of weekly schedule
- a maximum of 48 hours back up power supply
- a maximum wiring length of 1,000m (total: 2,000m)

Basic solution for control of Sky Air and VRV


- > Rotation function
- > Backup operation function.

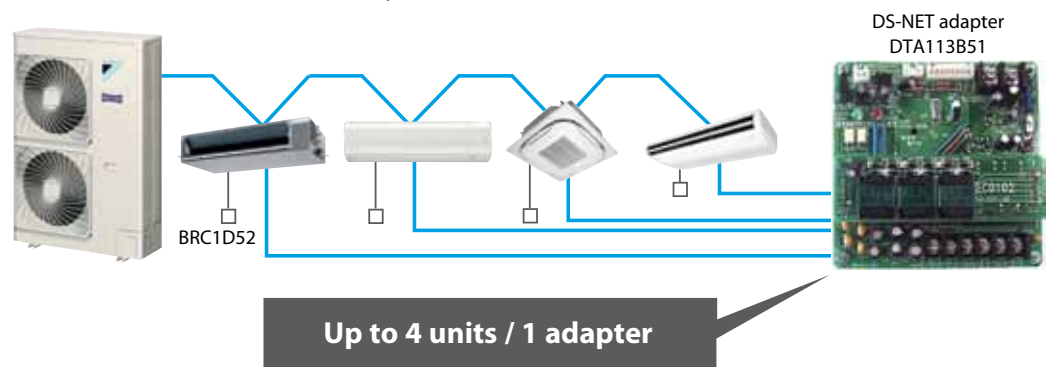

DCS601C51



Detailed & easy monitoring and operation of VRV systems (max. 64 indoor units groups).

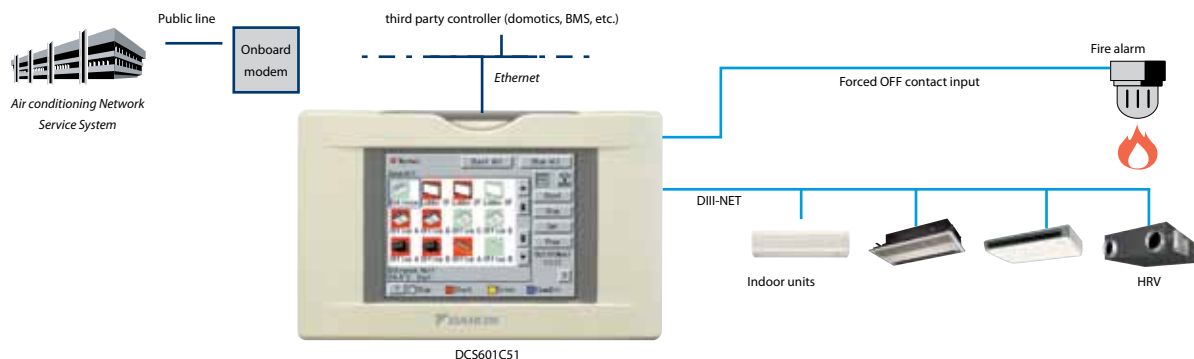

Languages

- > English
- > French
- > German
- > Italian
- > Spanish
- > Dutch
- > Portuguese

System layout

- > Up to 64 indoor units can be controlled
- > Touch panel (full colour LCD via icon display)

Management

- > Easy management of electricity consumption
- > Enhanced history function

Control

- > Individual control (set point, start/stop, fan speed) (max. 64 groups/indoor units)
- > Set back schedule
- > Enhanced scheduling function (8 schedules, 17 patterns)
- > Flexible grouping in zones
- > Yearly schedule
- > Fire emergency stop control
- > Interlocking control
- > Increased HRV monitoring and control function
- > Automatic cooling / heating change-over
- > Heating optimization
- > Temperature limit
- > Password security: 3 levels (general, administration & service)

- > Quick selection and full control
- > Simple navigation

Monitoring

- > Visualisation via Graphical User Interface (GUI)
- > Icon colour display change function
- > Indoor units operation mode
- > Indication filter replacement
- > Multi PC

Cost performance

- > Free cooling function
- > Labour saving
- > Easy installation
- > Compact design: limited installation space
- > Overall energy saving

Open interface

- > Communication to any third party controller (domotics, BMS, etc.) is possible via open interface (http option)

Connectable to

- > VRV
- > HRV
- > Sky Air (via interface adapter)
- > Split (via interface adapter)



Management control



Integration with intelligent control solutions



System overview

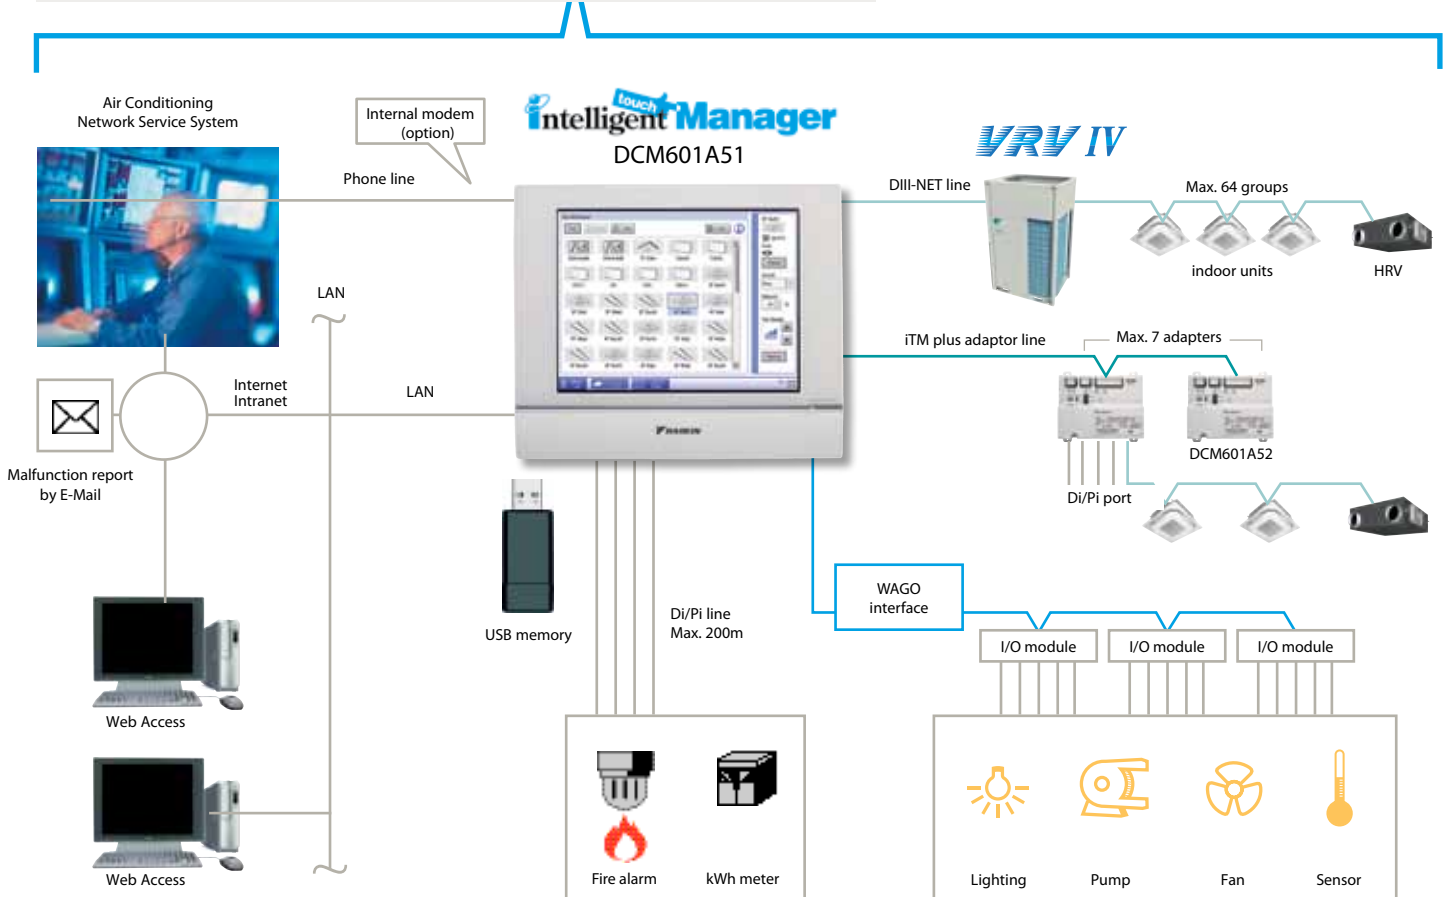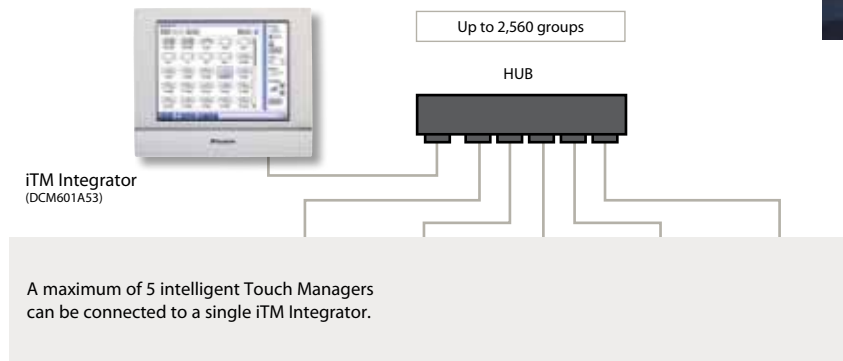

User friendliness

- › Intuitive user interface
- › Visual lay out view and direct access to indoor unit main functions
- › All functions direct accessible via touch screen or via web interface



Smart energy management

Smart energy management tools enable monitoring if energy use is according to plan and help detect origins of energy waste, thus maximizing efficiency



Flexibility

- › In size: modular design for use in small to large applications
- › In integration: from simple A/C control to small BMS control of lighting, pumps, ... via WAGO I/O



Easy servicing and commissioning

Perform the refrigerant containment check remotely and when it is most convenient for you and so prevent an on site visit. At the same time, increase your customer satisfaction because there is no disruption to the air conditioning during business hours.

Functions overview



DCM601A51

System layout

- › Up to 2,560 unit groups can be controlled
(ITM plus Integrator + 7 iPU
(incl. iTM adaptor)
- › Ethernet TCPIP

WAGO Interface

- › Modular integration of 3rd party equipment
 - WAGO coupler (interface between WAGO and Modbus)
 - Di module
 - Do module
 - Ai module
 - Thermistor module

Management

- › Web access
- › Power Proportional Distribution (option)
- › Operational history (malfunctions, operation hours, ...)
- › Smart energy management
 - monitor if energy use is according to plan
 - detect origins of energy waste
- › Setback function
- › Sliding temperature

Control


- › Individual control (2,560 groups)
- › Schedule setting (Weekly schedule, yearly calendar, seasonal schedule)
- › Interlock control
- › Setpoint limitation
- › Temperature limit

Languages

- › English
- › French
- › German
- › Italian
- › Spanish
- › Dutch
- › Portuguese

Integration of Sky Air and VRV in HA/BMS systems


Connect Sky Air / VRV indoor units to KNX interface for BMS integration

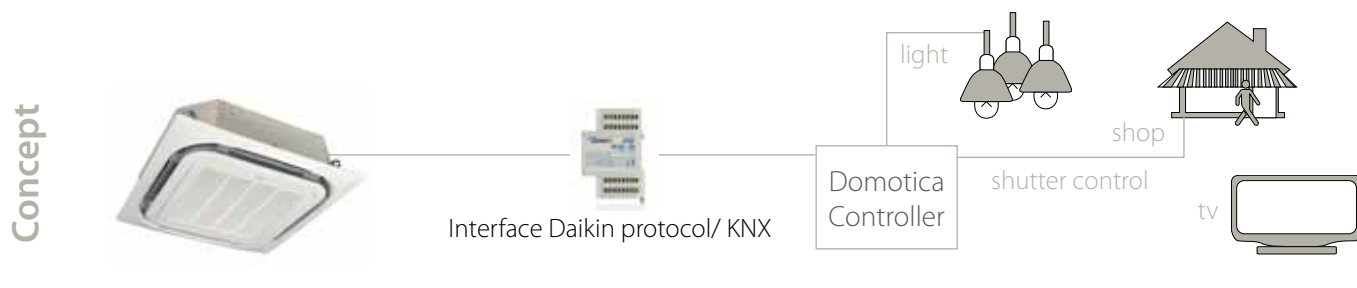

KNX interface line-up

The integration of Daikin indoor units through the KNX interface allows monitoring and control of several devices, such as lights and shutters, from one central controller. One particularly important feature is the ability to programme a 'scenario' - such as "Home leave" - in which the end-user selects a range of commands to be executed simultaneously once the scenario is selected. For instance in "Home leave", the air conditioner is off, the lights are turned off, the shutters are closed and the alarm is on.

KNX interface for


	 KLIC-DI Size 45x45x15mm	
	Sky Air	VRV
BASIC CONTROL		
ON/OFF	✓	✓
Mode	Auto, heat, dry, fan, cool	Auto, heat, dry, fan, cool
Temperature	✓	✓
Fan speed levels	2 or 3	2 or 3
Swing	Stop or movement	Swing or fixed positions (5)
ADVANCED FUNCTIONALITIES		
Error management	Communication errors,	
Scenes	✓	✓
Auto switch off	✓	✓
Temperature limitation	✓	✓
Initial configuration	✓	✓
Master and slave configuration	✓	✓

Standard protocol interfaces

BACnet Interface

Integrated control system for seamless connection between VRV and BMS systems

- › PPDdata is available on BMS system
- › Interface for BMS system
- › Communication via BACnet protocol (connection via Ethernet)
- › 256 units connectable per BACnet gateway
- › Unlimited sitesize
- › Easy and fast installation

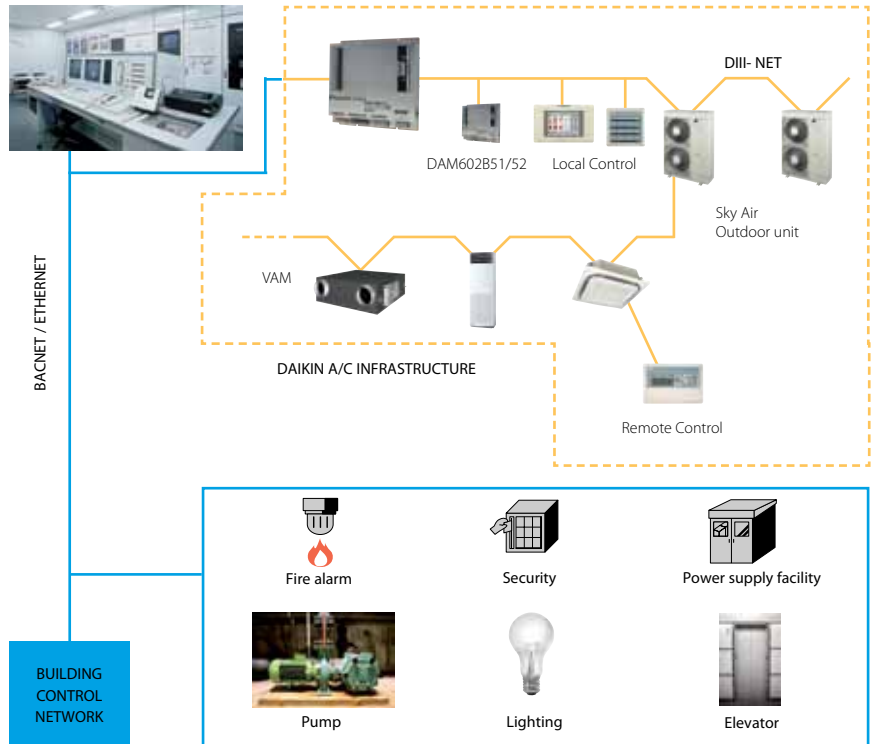


Standard protocol interfaces

LonWorks Interface

Open w integration of VRV monitoring and control functions into LonWorks networks

- › Interface for Lon connection to LonWorks networks
- › Communication via Lon protocol (twisted pair wire)
- › 64 units connectable per DMS-IF
- › Unlimited sitesize
- › Quick and easy installation

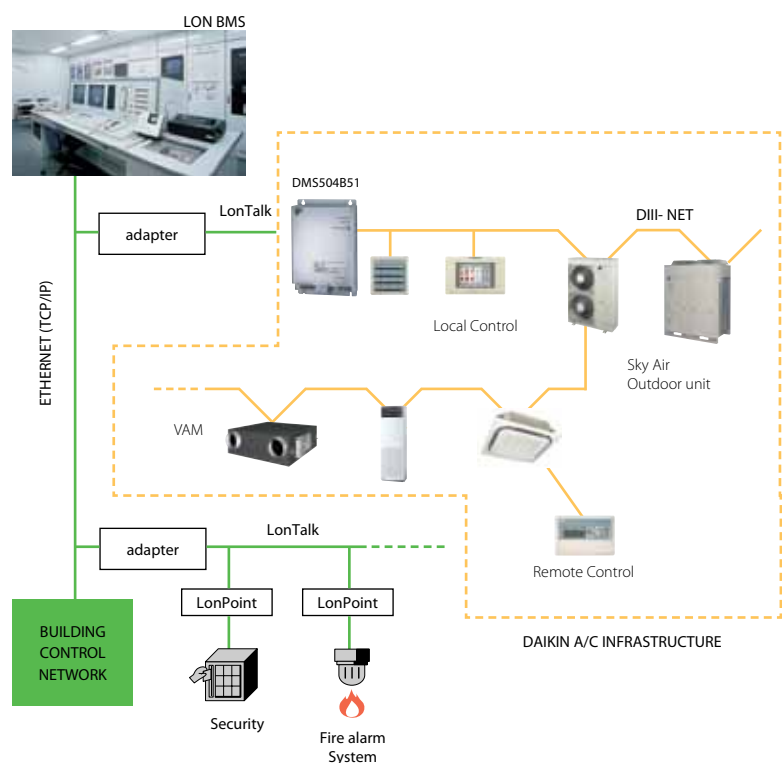

Flexible and easy installation



- > Accurate temperature measurement thanks to flexible placement of the sensor
- > No need for wiring
- > No need to drill holes
- > Ideal for refurbishment

Connection diagram Daikin indoor unit PCB (FBQ-C8 example)



Specifications

				WIRELESS ROOM TEMPERATURE SENSOR KIT (K.RSS)	
		WIRELESS ROOM TEMPERATURE RECEIVER		WIRELESS ROOM TEMPERATURE SENSOR	
Dimensions	mm	50 x 50		ø 75	
Weight	g	40		60	
Power supply		16VDC, max. 20 mA		N/A	
Battery life		N/A		+/- 3 years	
Battery type		N/A		3 Volt Lithium battery	
Maximum range	m			10	
Operation range	°C			0~50	
Communication	Type			RF	
	Frequency	MHz			868.3

- > Room temperature is sent to the indoor unit every 90 seconds or if the temperature difference is 0.2°C or larger.

KRCS01-1B KRCS01-4B

Wired room temperature sensor

- > Accurate temperature measurement, thanks to flexible placement of the sensor





Specifications

Dimensions (HxW)	mm	60 x 50
Weight	g	300
Length of branch wiring	m	12

Other integration devices

Adapter PCB's – Simple solutions for unique requirements

Daikin's adapter PCB's provide simple solutions for unique requirements. They are a low cost option to satisfy simple control requirements and can be used on single or multiple units.

	<p>(E)KRP1B* adapter for wiring</p>	<ul style="list-style-type: none">› Facilitates integration of auxiliary heating apparatus, humidifiers, fans, damper› Powered by and installed at the indoor unit
	<p>KRP2A*/ KRP4A* Wiring adapter for electrical appendices</p>	<ul style="list-style-type: none">› Remotely start and stop up to 16 indoor units (1 group) (KRP2A* via P1 P2)› Remotely start and stop up to 128 indoor units (64 groups) (KRP4A* via F1 F2)› Alarm indication/ fire shut down› Remote temperature setpoint adjustment

Concept and benefits

- › Low cost option to satisfy simple control requirements
- › Deployed on single or multiple units





Sensors & other devices

		INVERTER HEAT PUMP CONDENSING UNITS		
		ERQ 100~140 AV1	ERQ 125 AW1	ERQ 200~250 AW1
Adapters and control	KRC19-26A6 Mechanical cool/heat selector – allows to switch an entire Heat Pump system, or one BS-box of a Heat Recovery system between cooling, heating and fan only. Connects to the A-B-C terminals of the outdoor unit / BS-box.	✓	✓	✓
	KJB111A Installation box for remote cool/heat selector KRC19-26	✓	✓	✓
Others	Central drain pan kit Installs onto the underside of the outdoor unit and collects drain water from all bottom plate outlets into a single outlet. In cold areas should be heated by a field-supplied heater to prevent drain water from freezing in the drain pan.	-	KWC26B160	KWC26B280

		AHU APPLICATION CONTROL BOXES		HEAT RECLAIM VENTILATION
		FOR ERQ		VAM 150~2000
		EKEQDCB	EKEQFCB	
Adapters and control	BRC1E51A/B Premium wired remote controller with full-text interface and back-light	✓	✓	✓
	BRC1D52 Standard wired remote controller with weekly timer	✓	✓	✓
	BRC301B61 Wired remote controller for HRV	-	-	✓
	BRP4A50 Control kit for auxiliary 3rd party heater	-	-	✓
	KRP50-2 Adaptor PCB for 3rd party humidifier control / for operation signal output	-	-	✓
	External wired temperature sensor	KRCS01-1	-	-
	Wiring adaptor for external monitoring/control via dry contacts and setpoint control via 0-140Ω	KRP4A51	-	-
	Wiring adaptor for external central monitoring/control (controls 1 entire system)	-	-	KRP2A61
	External control adaptor for outdoor unit	DTA104A61	Ask your Daikin representative	-
	Installation box / Mounting plate for adaptor PCBs	-	-	KRP1B93
Connection to centralized control	-	-	Standard	

OUTDOOR UNITS	2MXS40H	2MXS50H	3MXS40K	3MXS52E	3MXS68G	4MXS68F	4MXS80E	5MXS90E
Air direction adjustment grille	KPW945A4							

	RXYSQ
	External control adaptor for outdoor unit Allows to activate Low Noise Operation and three levels of Demand Limiting via external dry contacts. Connects to the F1/F2 communication line and requires power supply from an indoor unit.
KRC19-26A6 Mechanical cool/heat selector – allows to switch an entire Heat Pump system, or one BS-box of a Heat Recovery system between cooling, heating and fan only. Connects to the A-B-C terminals of the outdoor unit / BS-box.	✓
KJB111A Installation box for remote cool/heat selector KRC19-26	✓

Options & accessories - *SkyAir*

INDOOR UNITS - CONTROL SYSTEMS	FCQHG71F	FCQHG100F	FCQHG125F	FCQHG140F	FCQG35F	FCQG50F	FCQG60F	FCQG71F	FCQG100F	FCQG125F	FCQG140F
Wired remote control		BRC1E52A (3)	BRC1E52B (4)					BRC1E52A (3)	BRC1E52B (4)		
Wireless remote control + decoration panel											
I-touch controller			DCS601CS1					DCS601CS1			
Infrared remote control (heat pump)			BRC7FA532F (5)					BRC7FA532F (5)			
Simplified remote control											
Remote control for hotel use			BRC3A61					BRC3A61			
Centralised remote control			DCS302CS1					DCS302CS1			
Unified ON/OFF control			DCS301B51					DCS301B51			
Schedule timer			DST301B51					DST301B51			
Adapter for wiring (interlock for fresh air intake fan)											
Adapter for external ON/OFF and monitoring/for electrical appendices			KRP1B57/KRP4A53 (1)(5)					KRP1B57/KRP4A53 (1)(5)			
Interface adapter for Sky Air											
Installation box for adapter PCB			KRP1H98 (5)					KRP1H98 (5)			
Remote sensor			KRCS01-4					KRCS01-4			
Remote ON/OFF, forced OFF			EKRORO2					EKRORO4 (TBC)			
Electrical box with earth terminal (3 blocks)			KJB311A					KJB311A			
Electrical box with earth terminal (2 blocks)			KJB212A					KJB212A			
Adapter for wiring (hour meter)			EKRP1C11 (1)(5)					EKRP1C11 (1)(5)			
Options PCB for external electrical heater, humidifier and/or hour meter			✓					✓			

Notes

- (1) Installation box for adapter PCB is necessary
- (2) Interface adapter for Sky Air series (DTA112B51) is necessary
- (3) Including following languages: English, German, French, Italian, Spanish, Dutch, Greek, Russian, Turkish, Portuguese, Polish
- (4) Including following languages: English, German, Czech, Croatian, Hungarian, Romanian, Slovenian, Bulgarian, Slovak, Serbian, Albanian.
- (5) Option not available in combination with BYCQ140*G
- (6) Installation box for adapter PCB (KRP1B101) is necessary
- (7) Electrical heater, humidifier and hour meter are field supply. These parts should not be installed inside the equipment.
- (8) Sensing function is not available
- (9) Independently controllable flaps function is not available

INDOOR UNITS	FCQHG71F	FCQHG100F	FCQHG125F	FCQHG140F	FCQG35F	FCQG50F	FCQG60F	FCQG71F	FCQG100F	FCQG125F	FCQG140F
Replacement long-life filter			KAFP551K160					KAFP551K160			
Sealing member of air discharge outlet			KDBHQ55B140 (4)					KDBHQ55B140 (4)			
Decoration panel			BYCQ140D + BYCQ140DW(1) + BYCQ140DG (2)(3)					BYCQ140D + BYCQ140DW(1) + BYCQ140DG (2)(3)			
Decoration panel + wireless remote control											
Fresh air intake kit (direct installation type)			KDDQ55B140-1 (4)+ KDDQ55B140-2 (6)					KDDQ55B140-1 (4)+ KDDQ55B140-2 (6)			
Panel spacer											
Sensor kit			BRYQ140A (5)					BRYQ140A (5)			

Notes

- (1) The BYCQ140DW has white insulations. Be informed that dirt is more visible on white insulation and that it is consequently not advised to install the BYCQ140DW decoration panel in environments exposed to concentrations of dirt.
- (2) To be able to control the BYCQ140DG, the controller BRC1E* is needed
- (3) The BYCQ140DG is only compatible with Sky Air RZQ(G), RZQS(G); All VRV outdoors; Split RKS, RXS
- (4) Option not available in combination with BYCQ140DG
- (5) Sensor kit can only be operated with BRC1E52A/B
- (6) BYFQ60B9 = basic, BYFQ60CW = White, BYFQ60CS = Grey
- (7) BRYQ60A2W = White, BRYQ60A2S = Grey
- (8) Both parts of the fresh air intake kit are needed for each unit.

ACQ71B	ACQ100B	ACQ125B	FFQ25C	FFQ35C	FFQ50C	FFQ60C	FDBQ25B	FBQ35C8	FBQ50C8	FBQ60C8	FBQ71C8	FBQ100C8	FBQ125C8	FBQ140C8	ABQ71B	ABQ125A	ABQ140A		
	ARCWB		BRC1D52 / BRC1E52A (3) - BRC1E52B (4)(9)				BRC1D52 / BRC1E52A (3) BRC1E52B (4)		BRC1D52 / BRC1E52A (3)		BRC1E52B (4)							-	
	ADP125A		-				-		-		-								-
	-		DCS601C51				-		DCS601C51 (2)		-								-
	-		BRC7E530/BRC7F530W/BRC7F530S (8-9)				-		BRC4C65		-								-
	-		-				-		-		-								-
	-		-				-		BRC3A61		-								-
	-		DCS302B51				-		DCS302C51		-								-
	-		DCS301B51				-		DCS301B51		-								-
	-		DST301B51				-		DST301B51		-								-
	-		-				-		KRP1B54		-								-
	-		KRP1B57/KRP4A53(6)				-		KRP4A51/KRP2A51		-								-
	-		-				-		DTA112B51		-								-
	-		KRP1B101 /KRP1BA101				-		-		-								-
	-		KRC501-4				-		KRC501-1		-								-
	-		-				-		EKRORO3		-								-
	-		-				-		-		-								-
	-		-				-		-		-								-
	-		EKRP1B2				EKRP1B2		-		-								-
	-		✓				✓		EKRP1B2A (7)		-								-

ACQ71B	ACQ100B	ACQ125B	FFQ25C	FFQ35C	FFQ50C	FFQ60C	FDBQ25B	FBQ35C8	FBQ50C8	FBQ60C8	FBQ71C8	FBQ100C8	FBQ125C8	FBQ140C8	ABQ71B	ABQ125A	ABQ140A		
	-		KAFQ441B160				-		-		-								-
	-		BDBHQ44C60				-		-		-								-
	-		BYFQ60B2/BYFQ60CW/BYFQ60CS (6)				-	BYBS32D	BYBS45D	BYBS71D	BYBS125D								-
	ADP125A		-				-		-		-								-
	-		KDDQ44XA60				-		-		-								-
	-		KDBQ44B60				-		-		-								-
	-		BRYQ60AW/BRYQ60AS (7)				-		-		-								-

Options & accessories - *SkyAir*

INDOOR UNITS - CONTROL SYSTEMS	FDQ125C	FDQ200B	FDQ250B	FAQ71C	FAQ100C	FHQ35C	FHQ50C	FHQ60C	FHQ71C
Wired remote control	BRC1D52 / BRC1E52A (3) / BRC1E52B (4)			BRC1D52 / BRC1E52A (3) / BRC1E52B (4)		BRC1D52 / BRC1E52A (3) / BRC1E52B (4)			
I-touch controller	DCS601C51	-	-	DCS601C51		-			
Infrared remote control (heat pump)	BRC4C65	-	-	BRC7EB518		BRC7EB53			
Simplified remote control	-			-		-			
Remote control for hotel use	-			BRC3A61		-			
Centralised remote control	DCS302C51			DCS302C51		DCS302C51			
Unified ON/OFF control	DCS301B51			DCS301B51		DCS301B51			
Schedule timer	DST301B51			DST301B51		DST301B51			
Adapter for wiring (interlock for fresh air intake fan)	KRP1C64	KRP1B54		-		-			
Adapter for external ON/OFF and monitoring/for electrical appendices	KRP4A51			KRP4A51 (1)		KRP1B54 / KRP4A52(1)			
Interface adapter for Sky Air (2)	-	DTA112B51		-		-			
Installation box for adapter PCB	-			KRP4A93		KRP1D93A			
Remote sensor	KRCS01-4B	-		KRCS01-1		KRCS01-4B			
Remote ON/OFF, forced OFF	EKRORO3	EKRORO		-		EKRORO4			
Electrical box with earth terminal (3 blocks)	-			KJB311A		KJB311A			
Electrical box with earth terminal (2 blocks)	-			KJB212A		KJB212A			
Options PCB for external electrical heater, humidifier and/or hour meter	EKRP1B2	EKRP1B2		✓		✓			
Mounting plate for adapter PCB	KRP4A96	-		-		-			

Notes

- (1) Installation box for adapter PCB is necessary
- (2) Interface adapter for Sky Air series (DTA112B51) is necessary
- (3) Including following languages: English, German, French, Italian, Spanish, Dutch, Greek, Russian, Turkish, Portuguese, Polish
- (4) Including following languages: English, German, Czech, Croatian, Hungarian, Romanian, Slovenian, Bulgarian, Slovak, Serbian, Albanian.
- (5) Electrical heater, humidifier and hour meter are field supply. These parts should not be installed inside the equipment.
- (6) With the infrared remote controller, the individual flap control and automatic air volume control cannot be controlled.

INDOOR UNITS	FDQ125C	FDQ200B	FDQ250B	FAQ71C	FAQ100C	FHQ35C	FHQ50C	FHQ60C	FHQ71C
Replacement long-life filter	-			-		KAFP501A56		KAFP501A80	
Drain-up kit	-			K-KDU572EVE		-			
Drain pump kit	-			-		KDU50P60		-	
L-type piping kit (upward direction)	-			-		KHFP5M35	KHFP5N63		-
Sealing member of air discharge outlet	-			-		-			
Decoration panel for air discharge	-			-		-			
Decoration panel	BYBS125D(1)			-		-			
Decoration panel option	EKBYBSD			-		-			
Noise filter	-			KEK26-1A		-			
Air discharge adapter for round duct	KDAJ25K140A			-		-			
Fresh air intake kit (direct installation type)	-			-		KDDQ50A140			

Notes

- (1) Decoration panel option EKBYBSD is required for direct mounting of the decoration panel of the unit.

OUTDOOR UNITS	RZQ(S)G125L(7)V1/LY1	RZQ(S)G100L(7)V1/LY1 RZQ(S)G125L(7)V1/LY1	RZQ(S)G140L(7)V1/LY1
Air direction adjustment grille	-		
Central drain plug	-		
Refrigerant branch piping	For twin	-	
	For triple	KHRQ127H	-
	For double twin	-	KHRQ127H (x3)-
Demand adapter kit	-		
Bottom plate heater	-		

Notes

- (1) Bottom plate heater is only available for RZQG* models
- (2) For combination of RZQ(S)G71L7V1B and EKBPH140L7 it is required to use the demand adapter KRP58M51 in order to connect the bottom plate heater.
- (3) For RZQG71-140L7Y1B/RZQSG100-140L7Y1B in combination with FCQG35-71F and FCQH71F use the refrigerant branch piping between brackets.

FHQ100C	FHQ125C	FHQ140C	AHQ71C	AHQ100C	AHQ125C	AHQ140C	FUQ71C	FUQ100C	FUQ125C	FVQ71C	FVQ100C	FVQ125C	FVQ140C
BRC1E52B (4)				ARCWB			BRC1D52 / BRC1E52A (3) / BRC1E52B (4)				BRC1D52 / BRC1E52A (3) / BRC1E52B (4)		
				-				-			DCS301C51		
				-				BRC7C58 (6)			-		
				-				-			BRC2C51		
				-				-			BRC3A61		
				-				DCS302C51			DCS302C51		
				-				DCS301B51			DCS301B51		
				-				DST301B51			DST301B51		
				-				-			-		
				-				KRP4A53 (1)			KRP1B57 / KRP4A52		
				-				-			-		
				-				KRP1B97			KRP4AA95		
				-				KRC501-4			-		
				-				EKOROS			-		
				-				KJB311A			-		
				-				KJB212A			-		
				-				✓			✓		
				-				-			-		

FHQ100C	FHQ125C	FHQ140C	AHQ71C	AHQ100C	AHQ125C	AHQ140C	FUQ71C	FUQ100C	FUQ125C	FVQ71C	FVQ100C	FVQ125C	FVQ140C
KAFP501A160				-				KAFP551K160			KAFJ95L160		
				-				-			-		
KDU50P140				-				-			-		
KHFP5N160				-				-			-		
				-				KDBHP49B140			-		
				-				KDBTP49B140			-		
				-				-			-		
				-				-			-		
				-				-			-		
				-				-			-		
				-				-			-		

AZQS71AV1/AY1	AZQS125AV1/AY1	AZQS140AV1/AY1	RZQ200C	RZQ250C
	-			-
	EKDK04			KWC26B280
	-			KHRQ22M20TA
	-			KHRQ250H7
	-			KHRQ22M20TA (x3)
	KRP58M51			KRP58M51
	-			-

	UATYQ-C
Rooftop controller	✓
PCB	✓
EXV	✓
Gold Fin (NA549)	✓
Scroll compressor	✓
Saranet Air Filter	✓
Side flow	✓
Convertible	✓
Filter drier	✓
High pressure switch	✓
Low pressure switch	✓
Economiser	ECONO-AY1

No options available for UATYP-AY1(B)
No options available for ECONO-AY1

Power supply

V1 = 1~, 220-240V, 50Hz

VE = 1~, 220-240V/220V, 50Hz/60Hz*

W1 = 3N~, 400V, 50Hz

* For VE power supply only 1~, 220-240V, 50Hz data is displayed in this catalogue.

Measuring conditions

Air conditioning

1) nominal cooling capacities are based on:	
Indoor temperature	27°CDB/19°CWB
Outdoor temperature	35°CDB
Refrigerant piping length	7.5m
Level difference	0m
2) nominal heating capacities are based on:	
Indoor temperature	20°CDB
Outdoor temperature	7°CDB/6°CWB
Refrigerant piping length	7.5m
Level difference	0m

The sound pressure level is measured via a microphone at a certain distance from the unit. It is a relative value, depending on the distance and acoustic environment (for measuring conditions: please refer to the technical databooks).

The sound power level is an absolute value indicating the "power" which a sound source generates.

For more detailed information please consult our technical databooks.

Benefits

We care icons



Seasonal efficiency, smart use of energy

Seasonal efficiency gives a more realistic indication on how efficient air conditioners operate over an entire heating or cooling season.



Inverter technology

In combination with inverter controlled outdoor units



Home leave operation

During absence, the indoor temperature can be maintained at a certain level.



Auto-cleaning panel

The filter in the auto-cleaning decoration panel automatically cleans itself once per day. Simplicity of upkeep means optimum energy efficiency and maximum comfort without the need for expensive or time-consuming maintenance.



Fan only

The air conditioner can be used as fan, blowing air without cooling or heating.

Humidity control



Dry programme

Allows humidity levels to be reduced without variations in room temperature.

Remote control & timer



Weekly timer

Timer can be set to start heating or cooling anytime on a daily or weekly basis



Infrared remote control

Infrared remote control with LCD to start, stop and regulate the air conditioner from a distance.



Wired remote control

Wired remote control to start, stop and regulate the air conditioner from a distance.



Centralised control

Centralised control to start, stop and regulate several air conditioners from one central point.

Air treatment



Air filter

Removes airborne dust particles to ensure a steady supply of clean air.

Comfort



Draught prevention

When starting to warm up or when the thermostat is off, the air discharge direction is set horizontally and the fan to low speed, to prevent draught. After warming up, air discharge and fan speed are set as desired.



Auto cooling-heating changeover

Automatically selects cooling or heating mode to achieve the set temperature (heat pump types only).



Whisper quiet

Daikin indoor units are whisper quiet. Also the outdoor units are guaranteed not to disturb the quiet of the neighbourhood.

Air flow



Ceiling soiling prevention

A special function prevents air blowing out too long in horizontal position, to prevent ceiling stains.



Vertical auto swing

Possibility to select automatic vertical moving of the air discharge louvre, for uniform air flow and temperature distribution.



Fan speed steps

Allows to select up to the given number of fan speed.

Other functions



Auto-restart

The unit restarts automatically at the original settings after power failure.



Twin/triple/double twin application

2, 3 or 4 indoor units can be connected to only 1 outdoor unit even if they have different capacities. All indoor units operate within the same mode (cooling or heating) from one remote control.



VRV for residential application

Up to 9 indoor units (even different capacities and up to 71 class) can be connected to a single outdoor unit. All indoor units can individually be operated within the same mode.



Self-diagnosis

Simplifies maintenance by indicating system faults or operating anomalies.



Multi model application

Up to 5 indoor units (even different capacities) can be connected to a single outdoor unit. All indoor units can individually be operated within the same mode.



Drain pump kit

Facilitates condensation draining from the indoor unit.



Seasonal efficiency, smart use of energy



Seasonal efficiency is a measure mandated by the European Union to optimise energy consumption. The EU wants to make people aware of what units are consuming and ban non-efficient products from the market. Seasonal efficient units reflect the actual performance you can expect over an entire heating and cooling season. The standard comes into force from January 2013 onwards for products under 12 kW.

Today, Daikin is leading the way towards more efficient and cost-effective comfort solutions. All Daikin products – residential and commercial as well as industrial – are seasonal efficient, they all reduce energy and costs in a smart way.

SEASONAL EFFICIENCY Find out more on www.daikin.eu
Smart use of energy



The present leaflet is drawn up by way of information only and does not constitute an offer binding upon Daikin Europe N.V. Daikin Europe N.V. has compiled the content of this leaflet to the best of its knowledge. No express or implied warranty is given for the completeness, accuracy, reliability or fitness for particular purpose of its content and the products and services presented therein. Specifications are subject to change without prior notice. Daikin Europe N.V. explicitly rejects any liability for any direct or indirect damage, in the broadest sense, arising from or related to the use and/or interpretation of this leaflet. All content is copyrighted by Daikin Europe N.V.



Daikin Europe N.V. participates in the Eurovent Certification programme for Air conditioners (AC), Liquid Chilling Packages (LCP), Air handling units (AHU) and Fan coil units (FCU). Check ongoing validity of certificate online: www.eurovent-certification.com or using: www.certiflash.com

FSC

ECPEN13-114

Daikin products are distributed by: